
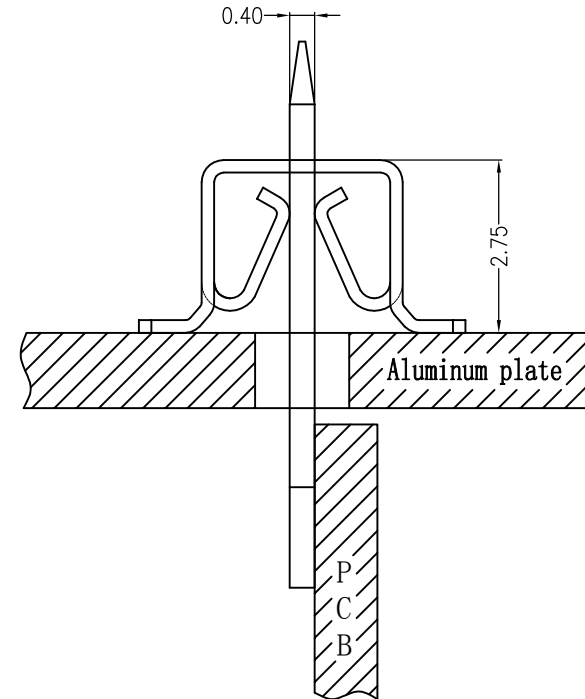
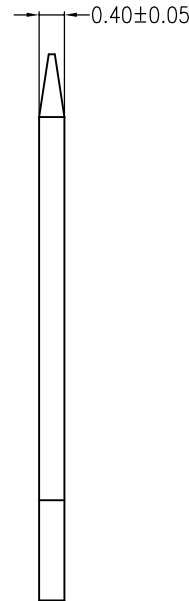


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	—	NEW RELEASE	蒋建银	2018.01.29

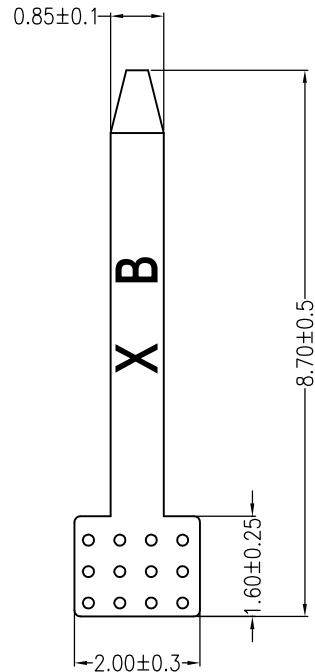

Assembly Layout

主要技术参数 Main Specifications


线 数 (Poles): 01
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance):
额定电压 (Rated voltage): 250 V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage):
温度范围 (Temperature Range): $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

XB-L032B-01-000G2-R-8.7

REF: 01
CIRCUITS:
PLASTIC MATERIAL:
000=No plastic parts

SPECIAL CODE:
针长8.7
PACKAGING:
R=REEL
METAL CODE:
2=Brass
PLATING:
G=Ni

C					
B					
A	CONTACT		1 PCS	Brass	Ni-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: L032B-8.7R -					
.X±0.35		X.±	USE: CUSTOMER		PART NO.:
.XX±0.25		.X±	APPD: 邵敬和		L032B-01-000G2-R-8.7
.XXX±0.15		.XX±	CHKD:		DWG NO.:
--		--	田峰		GCCP-0057
		UNITS: mm	DR: 蒋建银		SCALE 1 : 1
					SHEET 1 / 1