

A

B




C

D

E

F



REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

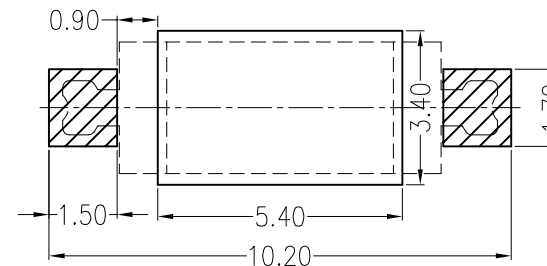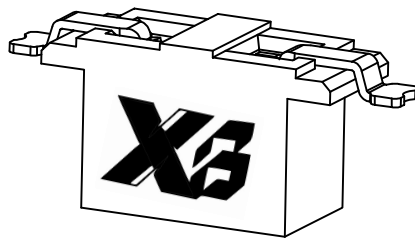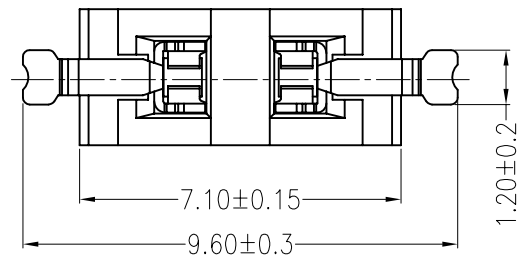

Board Layout

General Tolerance: ± 0.05

0.1 MAX

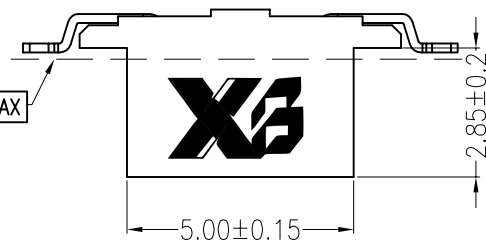

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$ 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 125V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +120^{\circ}\text{C}$

ORDER INFORMATION:

XB-L051-02-F2MB-R

PART No.

No. FOR CIRCUITS:

02

PLASTIC MATERIAL:

F2M=LCP (BEIGE)



PACKAGING:

R=REEL

P=PE


PLATING:

B=MATTE Sn

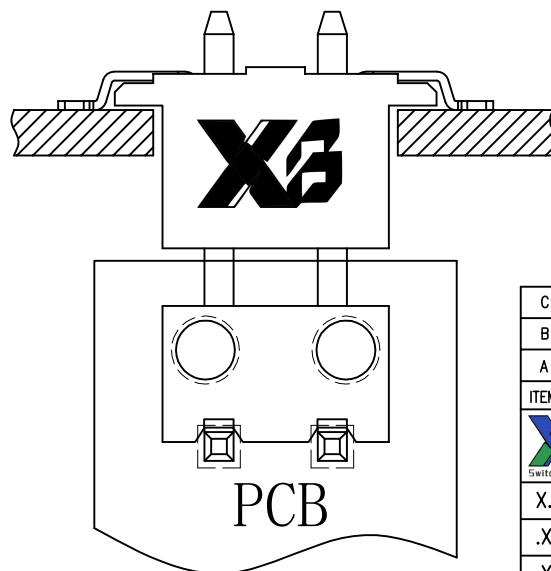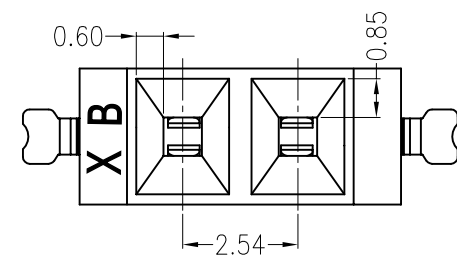

PCB

Assembly Layout

C				
B	CONTACT		2 PCS	PhosphorBronze MATTE Sn-plated
A	PEDESTAL		1 PCS	LCP UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: - 2.54mmPITCH 180°WAFER SMT TYPE				
X.±0.5		X.±5°	USE: CUSTOMER	PART NO.:
.X±0.3		.X±2°		L051-02-F2MB-R
.XX±0.25		.XX±1°	APPD: 邵敬和	DWG NO.:
--		--		CHKD: 田峰
		UNITS: mm	DR: 周秀龙	SCALE 1 : 1
				SHEET 1 / 1