

A

B







C

D


E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
B	-	Release	-	2021.01.29

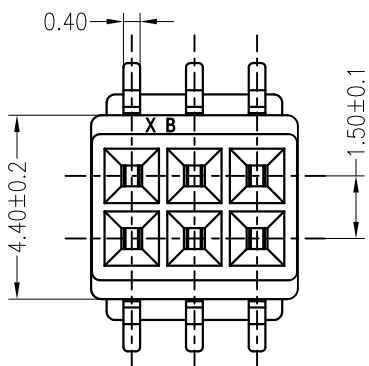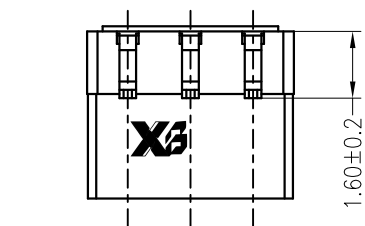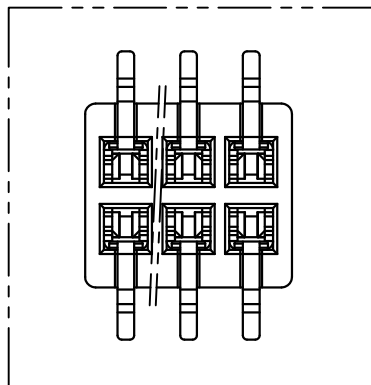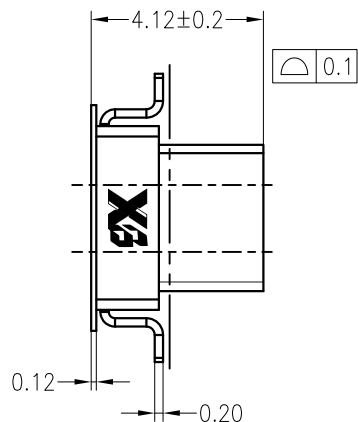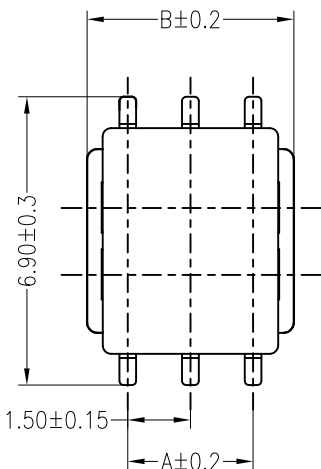

PCB LAYOUT

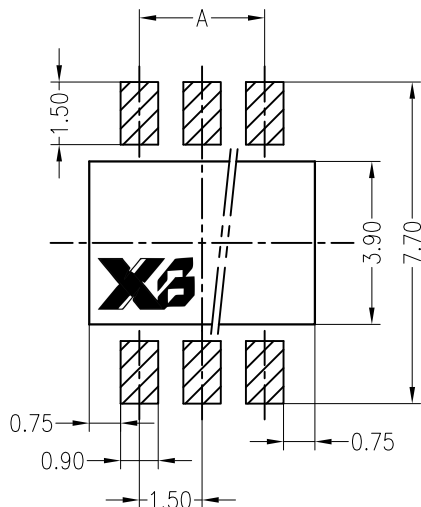

PIN.	DIM A	DIM B
2*2	1.50	3.50
2*3	3.00	5.00
2*4	4.50	6.50
2*5	6.00	8.00
2*6	7.50	9.50
2*7	9.00	11.00
2*8	10.50	12.50

主要技术参数 Main Specifications

线 数 (Poles): 04 to 16

接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$ 绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L1501AFV-2**-F6MB1-R	
PART No. _____	PACKAGING: R=REEL
No.OF CIRCUITS: _____	Metal code: 1=PhosphorBronze
PLASTIC MATERIAL: F6M=LCP(BEIGE)	PLATING: B=MATTE Sn

C	MYLAR		1 PCS	
B	CONTACT		n PCS	PhosphorBronze Sn-plated
A	HOUSING		1 PCS	LCP UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
TITLE: L1501AFV				
X.±0.5	X.±5°	USE:	CUSTOMER	
.X±0.3	.X±2°	APPD:	邵敬和	
.XX±0.25	.XX±1°	CHKD:	田峰	
--	--	DR:	蒋建银	
UNITS: mm				
SCALE 1 : 1		SHEET 1 / 1		