

A

B

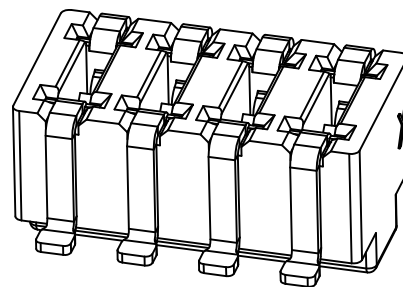
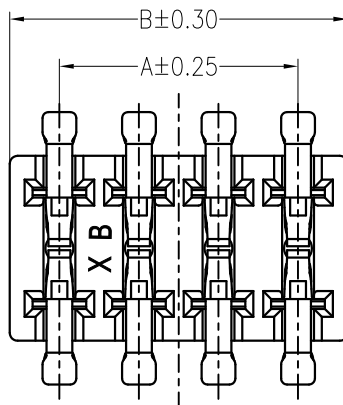
C

D

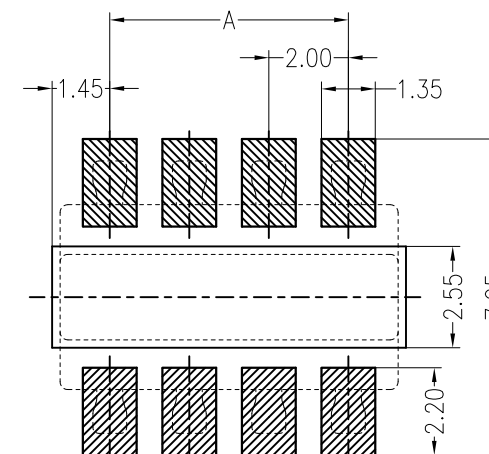
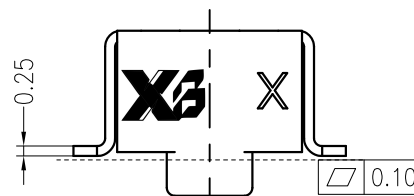
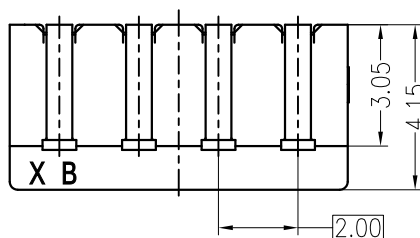
E

F

REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	FangSongLe	2019/11/22

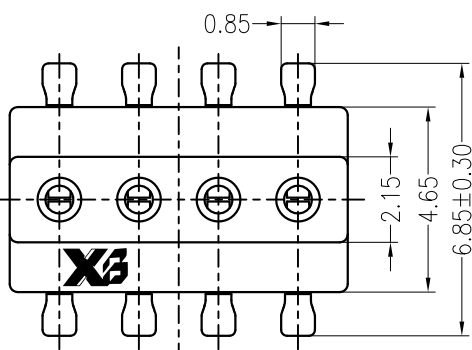
**Specifications:**

Contact resistance: $\leq 20\text{m}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
Rated voltage: 250V AC DC
Rated current: 1.0A AC DC
Withstand Voltage: 1000V AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Housing: LCP UL94V-0, BEIGE
Contacts: Phosphor Bronze/MATTE Sn-plated
Applicable wires: 24AWG

PCB LAYOUT(Tolerance: ± 0.05)**ORDER INFORMATION:****XB-L2008AFV-**-F8MB1-R**

PART No. _____
No.OF CIRCUITS: 02-08
PLASTIC MATERIAL: F8M=LCP(BEIGE)
PACKAGING: R=REEL
Metal code: 1=PhosphorBronze
PLATING: B=MATTE Sn

PIN	DIM A	DIM B
2	2.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50



XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE:
L2008AFV

GENERAL TOLERANCE		USE:
X. ± 0.50	X. $\pm 5^{\circ}$	CUSTOMER
X.X ± 0.30	X.X $\pm 2^{\circ}$	APPD: Liuzhengling
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	CHKD: Steven
UNITS: mm		DR: FangSongLe

PART NO.:
L2008AFV-**-F8MB1-R

DWG NO.:

SCALE
1 : 1SHEET
1 / 1