

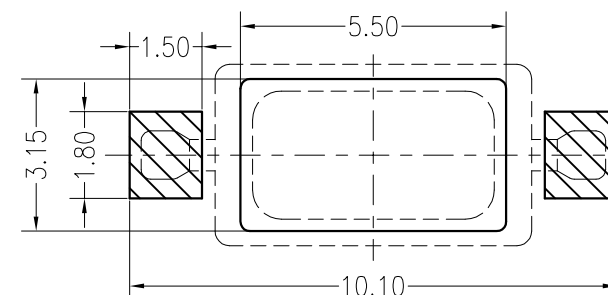
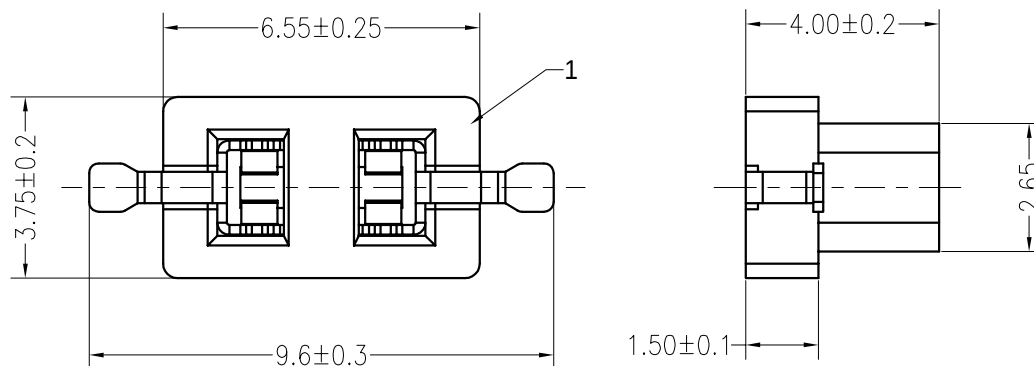
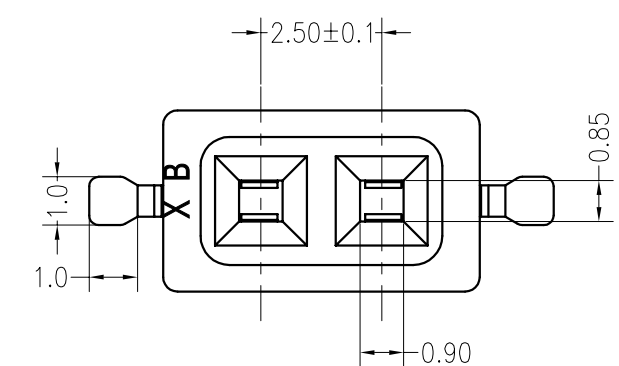


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	-	2018.07.02



Board Layout
General Tolerance: ± 0.05

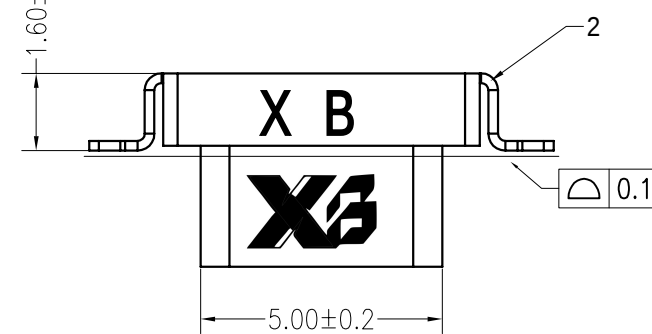

主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电 压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L2501AFV-02-F6MB1-R

PART No.		PACKAGING:
No. FOR CIRCUITS: 02		R=REEL P=PE
PLASTIC MATERIAL:		Metal code:
F6M=LCP(BEIGE) PLATING: B=MATTE Sn		1=Phosphor bronze

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	Phosphor bronze	TIN-plated
A	pedestal	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				TITLE: L2501AFV-02	
X.±0.5	X.±5'	USE:	PART NO.:		
.X±0.3	.X±2'	APPD:	L2501AFV-02-F6MB1-R		
.XX±0.25	.XX±1'	CHKD:	DWG NO.:		
--	--	田峰			
UNITS: mm	DR:	蒋建银	SCALE	SHEET	
			1 : 1	1 / 1	