
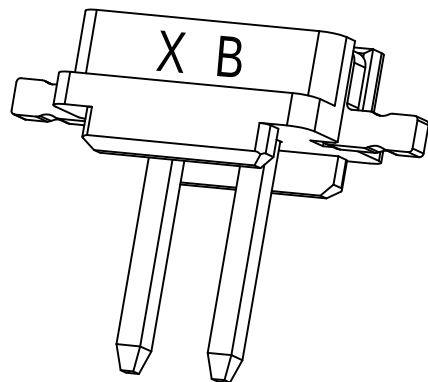
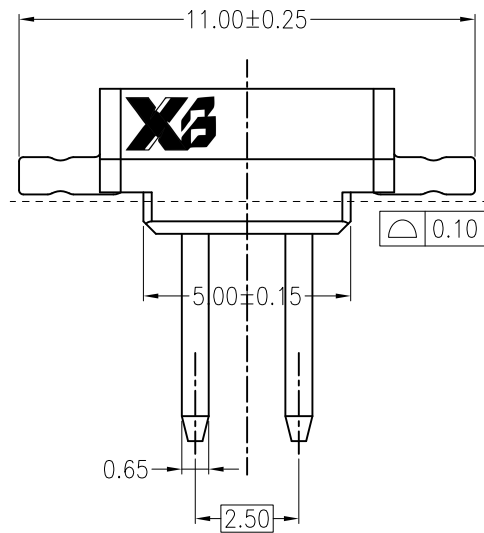


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Lingqing	2020/03/27

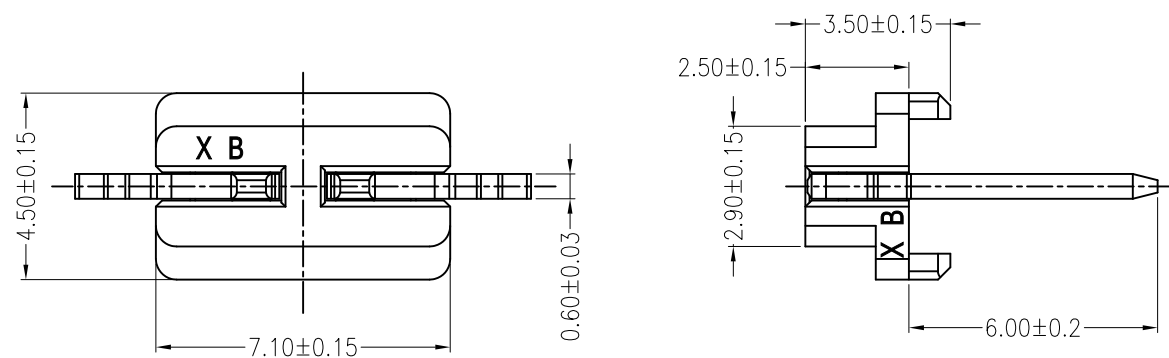

Specifications:


Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 230V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1500V AC/minute
 Temperature Range: $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$
 Housing: LCP UL94V-0, BEIGE
 Contacts: Brass / Sn-plated

ORDER INFORMATION:

XB-L2504AFV-02-F8MA3-*

PART No. _____
 No.OF CIRCUITS: _____
 02 _____
 PLASTIC MATERIAL: _____
 F8M=LCP(BEIGE)

PACKAGING:
 P=PE
 R=REEL
 Metal code:
 3=Brass
 PLATING:
 A=Sn-plated

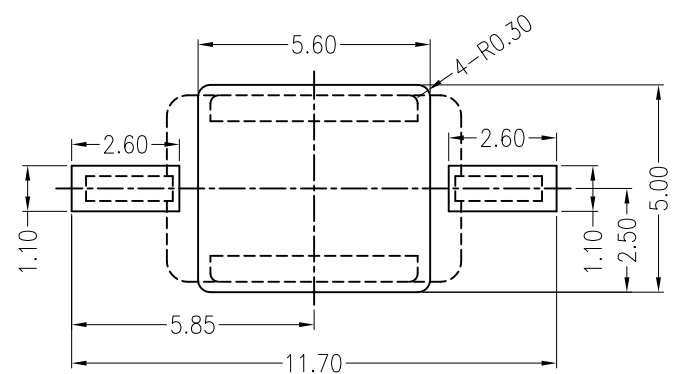

Board Layout
 General Tolerance: ± 0.05

 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		TITLE: 2.5mmPITCH 180°WAFER SMT TYPE	
GENERAL TOLERANCE X. ± 0.50 X. $\pm 5^{\circ}$ X.X ± 0.30 X.X $\pm 2^{\circ}$ X.XX ± 0.20 X.XX $\pm 1^{\circ}$		USE: CUSTOMER APPD: Liuzhengling CHKD: Steven	
UNITS: mm		DR: Zenglingqing	
PART NO.: L2504AFV-02-F8MA3-*		DWG NO.:	
SCALE 1 : 1		SHEET 1 / 1	