

A

B



C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A	-	Release	李润	2016.05.23

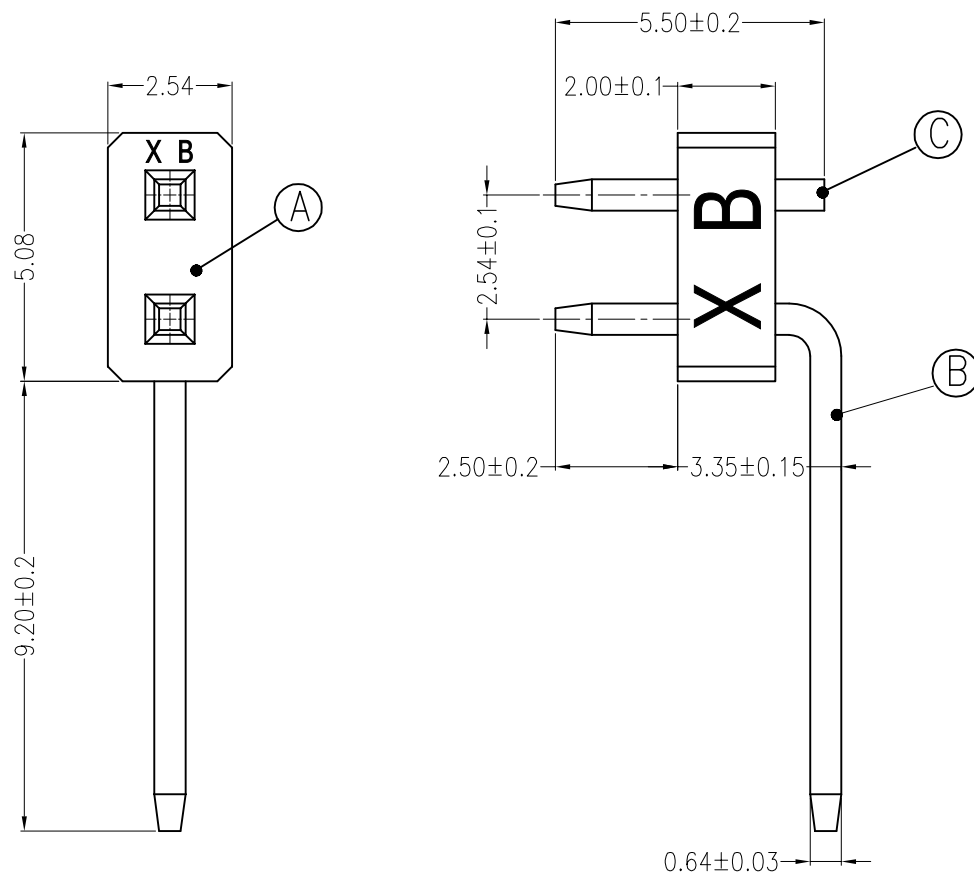

Board Layout
General Tolerance: ± 0.05

主要技术参数 Main Specifications

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 1.0A AC DC

耐电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L2546AW-201-F2MA2-P-1

PART No.

No. FOR CIRCUITS:
2X01

PLASTIC MATERIAL:
F2M=LCP (BEIGE)

SPECIAL CODE:

1=弯针9.2X2.5X3.35

PACKAGING:


P=PE

Metal code:

2=Brass

PLATING:

A=Sn

C	CONTACT		1 PCS	Brass	Sn-plated
B	CONTACT		1 PCS	Brass	Sn-plated
A	HOUSING		1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD TITLE: L2546AW 2.54Pitch 90°wafer dip type					
.X±0.35		X.±	USE:		PART NO.:
.XX±0.25		.X±	CUSTOMER		L2546AW-201-F2MA2-P-1
.XXX±0.15		.XX±	APPD: 邵敬和		DWG NO.:
--		--	CHKD: 田 峰		
		UNITS: mm	DR: 吴丹平		SCALE 1 : 1
					SHEET 1 / 1