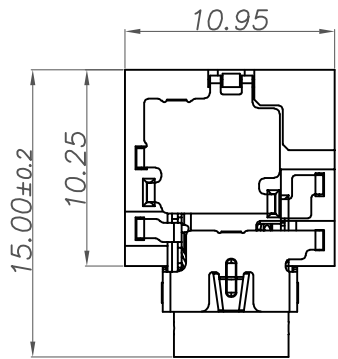


NOTES:

1. ELECTRICAL CHARACTERISTICS:

1-1 CONTACT RESISTANCE: 50mΩ MAX. (INITIAL)
100mΩ MAX. (FINAL)

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

2-1. PLUG INSERTION FORCE : 0.4~3.0KGS .







2-2. PLUG WITHDRAWAL FORCE : 0.3~2.0KGS .

3. DURABILITY TEST: 5,000 CYCLES .

4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

5. SOLDERING HEAT RESISTANCE REFLOW SOLDERING 260C.

6. PLUG INTERFACE DIMENSIONS CONFORM TO EIAJ RC-5325 SPECc.

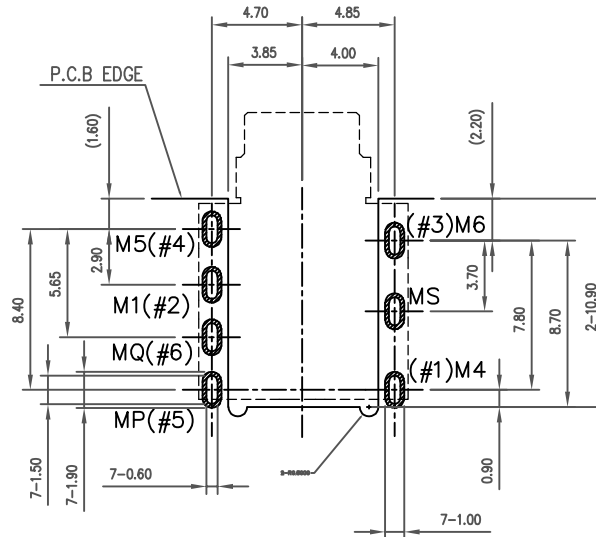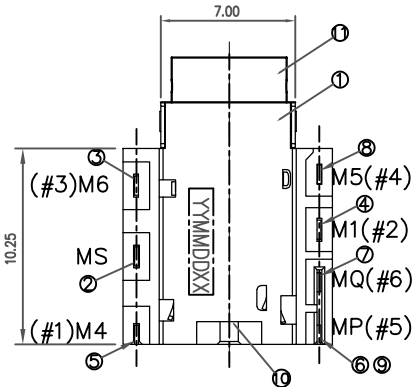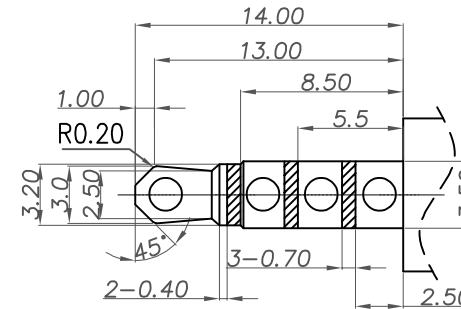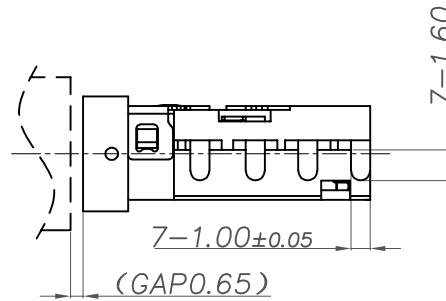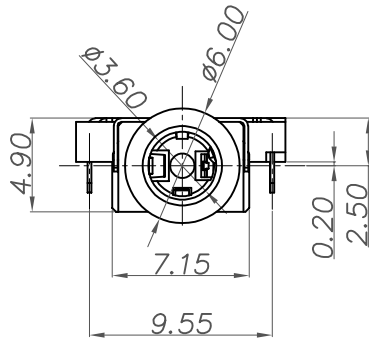

RECOMMENDED PADS LAYOUT
<TOP VIEW>

①	METAL BUSHING	C2680	AU G/F	1	Ø6.0
⑩	DUMMY PIN	SUS304	—	1	0.15t
⑨	SEPARATOR	PA9T	UL94V-0	1	BLACK
⑧	M5_CONTACT	C5210R-EH	Ni 50u' MIN	1	0.2t
⑦	MQ_SHUNT	C5210R-EH	Overall nickel plating 50u' MIN , bright tin plating 100u' MIN	1	0.2t
⑥	MP_CONTACT	C5210R-EH		1	0.2t
⑤	M4_CONTACT	C5210R-EH		1	0.2t
④	M1_CONTACT	C5210R-EH		1	0.2t
③	M6_CONTACT	C5210R-EH	Ni 50u' MIN	1	0.2t
②	MS_SHELL	C5210R-EH	UL94V-0	1	0.2t
①	P1_HOUSING	PA9T	UL94V-0	1	BLACK
ITEM	DESCRIPTIONs	MATERIAL	FINISH	Q'TY	NOTE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
X.	±0.50	X.	±2°
X.X	±0.30	X.X	±1°
X.XX	±0.20	X.XX	
X.XXX	±0.10	X.XXX	








UNIT:
mm

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	GAO.PENG 2021.10.8	PART NAME:	Ø3.5 AUDIO JACK
CHECK:		PART NO.:	XB-PJ03506-1108-00000H
APPROVED:	HE.LONG.FEI 2021.10.8	SHEET: 1/2	REV.: A1

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

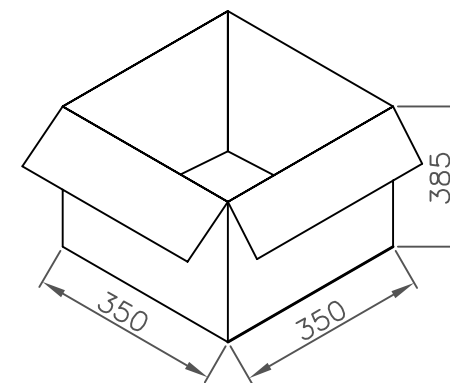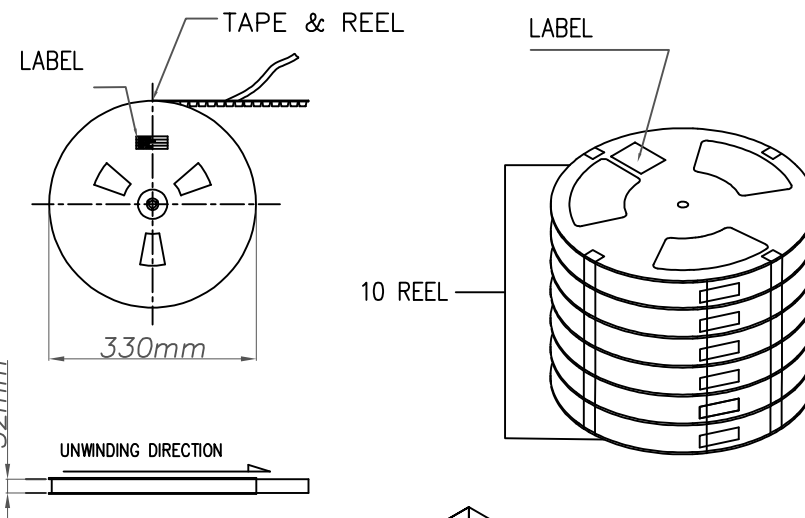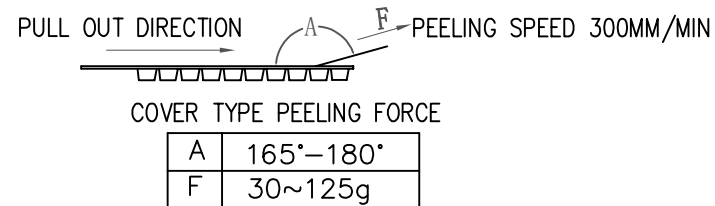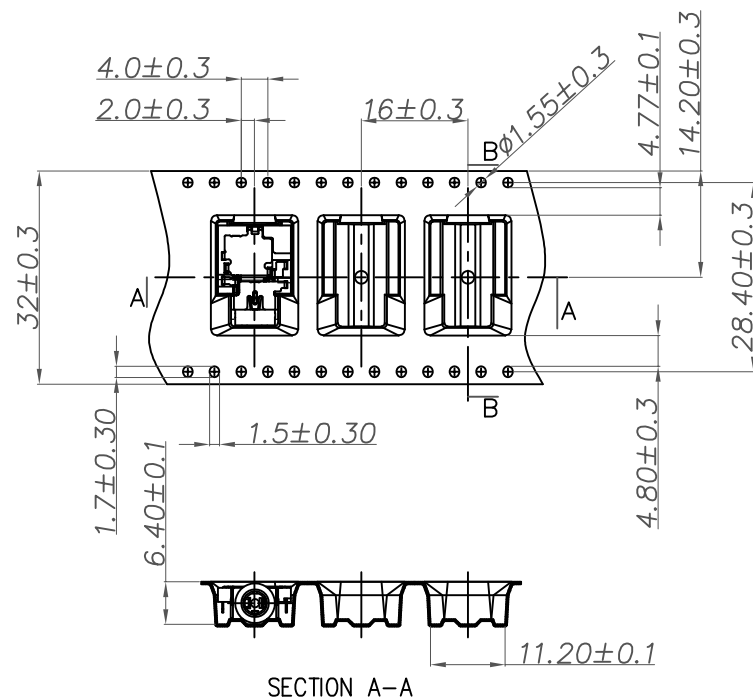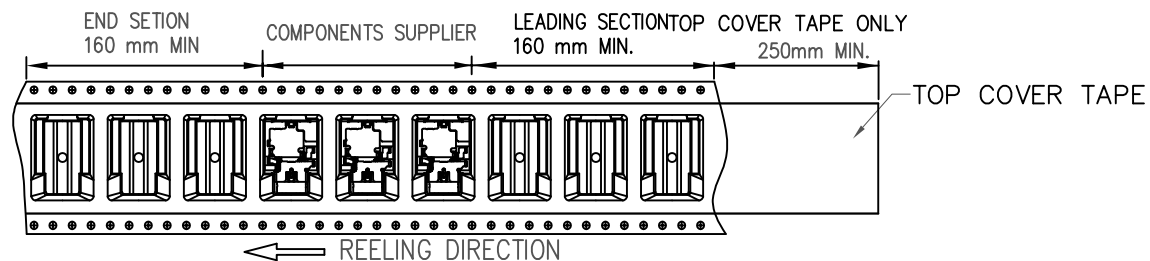

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20 .
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
3. MATERIAL: BLACK POLYSTYRENE
4. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS.
5. THICKNESS : 0.40 ± 0.05 mm.
6. COMPONENT LOAD PER 13" REEL 600 PCS
7. 10 REEL 6000 PCS/CARTON
8. CARTON DIMENSIONS: 350*350*385mm

UNLESS OTHERWISE SPECIFIED TOLERANCES				XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.						
DECIMALS:		ANGLES:		DESIGN:	GAO.PENG 2021.10.8	PART NAME: Φ3.5 AUDIO JACK				
DIM	TOL	DIM	TOL							
X.	±0.50	X.	±2°							
X.X	±0.30	X.X	±1°							
X.XX	±0.20	X.XX		CHECK:	HE.LONG.FEI 2021.10.8	PART NO.: XB-PJ03506-1108-00000H				
X.XXX	±0.10	X.XXX								
3RD ANGLE PROJECTION								APPROVED:	SHEET: 2/2	
UNIT: mm										
						REV.: A1				

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

8

7

6

5

4

3

2

1