

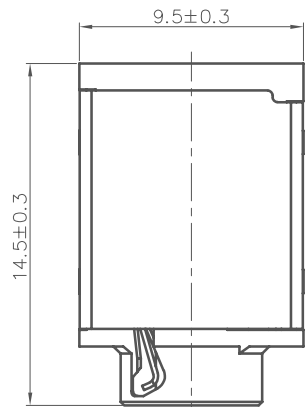

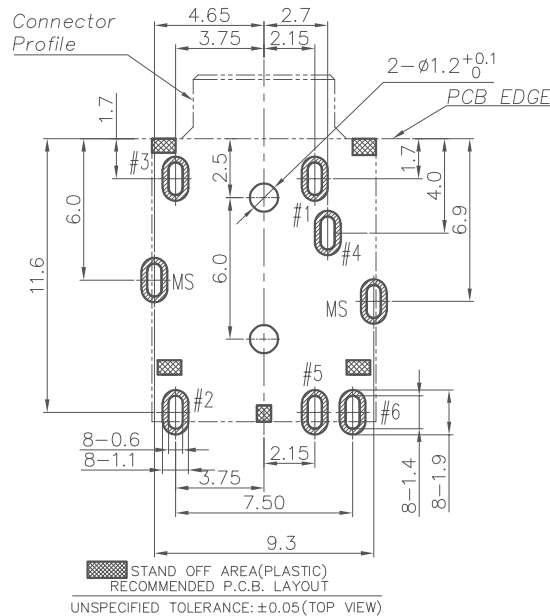
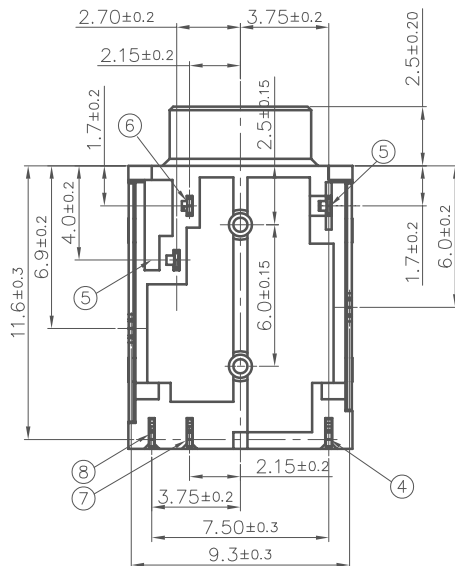
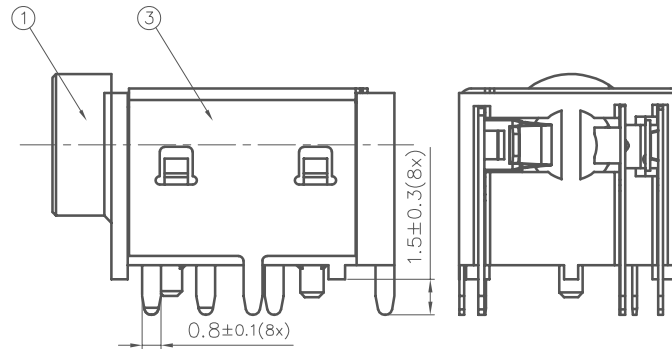


RECOMMENDED PLUG
Ø3.5 4-POLE STANDARD PLUG

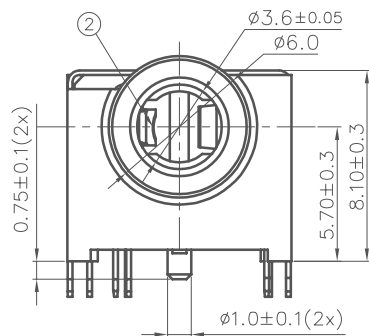

□ : TERMINAL NO.



⑧ Make spring	6	1	Copper Alloy	20u"Ag ,50u" Ni Plating
⑦ Transfer spring	5	1	Copper Alloy	
⑥ Earth spring	1	1	Copper Alloy	Au0.6u" Min on contact area
⑤ Ring spring	3	4	2	Copper Alloy
④ Tip spring	2	1	Copper Alloy	Matte Tin 100u" on solder Tail, All over Ni 50u" MIN. Plating
③ Shell		1	Copper Alloy	Ni 40u"Min Plating
② Separate		1	High-Temp Thermoplastic (Halogen Free)	BLACK
① Housing		1	High-Temp Thermoplastic (Halogen Free)	BLACK
NO.	DESCRIPTION	Q' TY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:	ANGLES:	DESIGN:	GAO. PENG 2023.8.31	PART NAME: Ø3.5mm Phone Jack
DIM	TOL	DIM	TOL	
X.	±0.50	X.	±2°	
X.X	±0.30	X.X	±1°	
X.XX	±0.20	X.XX		
X.XXX	±0.10	X.XXX		
CHECK:		APPROVED	HE. LONG. FEI 2023.8.31	PART NO. XB-PJ03506-1190-00000H
				SHEET: 1/1 REV.: A1
				DRAWING NO

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------