




REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

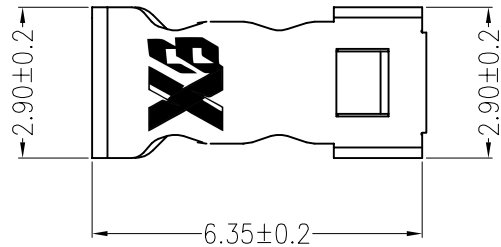

主要技术参数 Main Specifications

线数 (Poles): 01

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 800\text{M}\Omega$

额定电压 (Rated voltage): 250 V AC DC

额定电流 (Rated current): 2.0A AC DC

耐电压 (Withstand Voltage): 1500V AC/minute

温度范围 (Temperature Range) : $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:


XB-L024-01-T2CB-R

PART No.


No. FOR CIRCUITS:
01

PLASTIC MATERIAL:
T2C=PBR (BEIGE)


—PACKAGING:
R=REEL
P=PE
—PLATING:
B=MATTE Sn

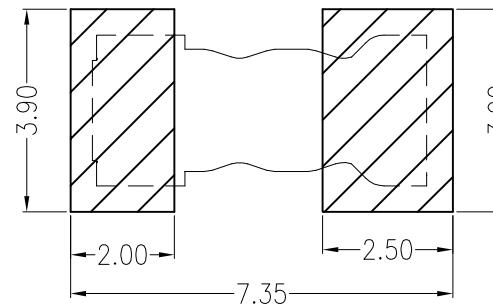

Board Layout

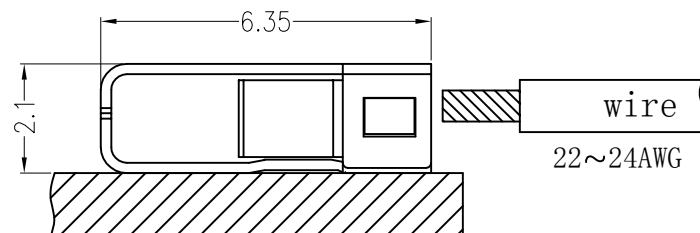

Assembly Layout

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				TITLE: -	
X.±0.5		X.±5°		USE: CUSTOMER	PART NO.:
X.±0.3		X.±2°			LO24-01-T2CB-R
.XX±0.25		.XX±1°		APPD: 邵敬和	DWG NO.:
--		--			GCCP-0045
		UNITS: mm		DR: 周秀龙	SCALE 1 : 1
					SHEET 1 / 1