
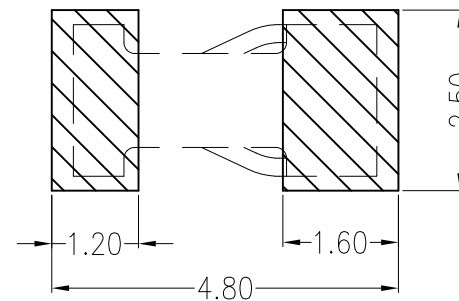

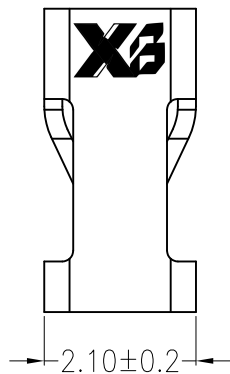



REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30
A/1	增加管控开口尺寸	曾令青	2018.08.22



主要技术参数 Main Specifications

线数 (Poles): 01

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance):

额定电压 (Rated voltage): 250 V AC DC

额定电流 (Rated current): 2.0A AC DC


耐电压 (Withstand Voltage):

温度范围 (Temperature Range):


ORDER INFORMATION:

XB- L024B-01-T2CB-R			
PART No.			
No. FOR CIRCUITS:			
01			
PLASTIC MATERIAL:			
T2C=PBR (BEIGE)			
		PACKAGING:	
		R=REEL	
		P=PE	
		PLATING:	
		B=MATTE Sn	

Board Layout

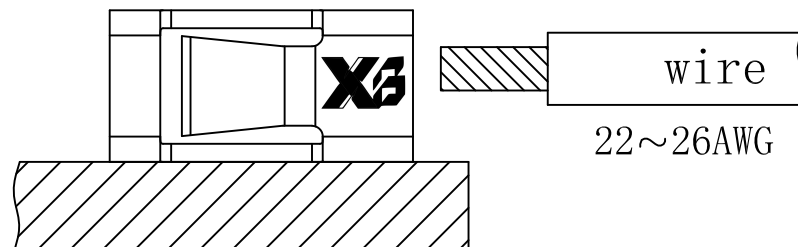

Assembly Layout

C					
B					
A	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				TITLE: —	
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2'	APPD: 邵敬和		L024B-01-T2CB-R	
.XX±0.25	.XX±1'	CHKD: 田峰		DWG NO.:	
--	--			GCCP-0301	
	UNITS: mm	DR: 蒋建银		SCALE 1 : 1	SHEET 1 / 1