

A

B

C

D




E

F

REV	DESCRIPTION	DESIGN	DATE
A0	Release	李润	2016.04.20

1

1

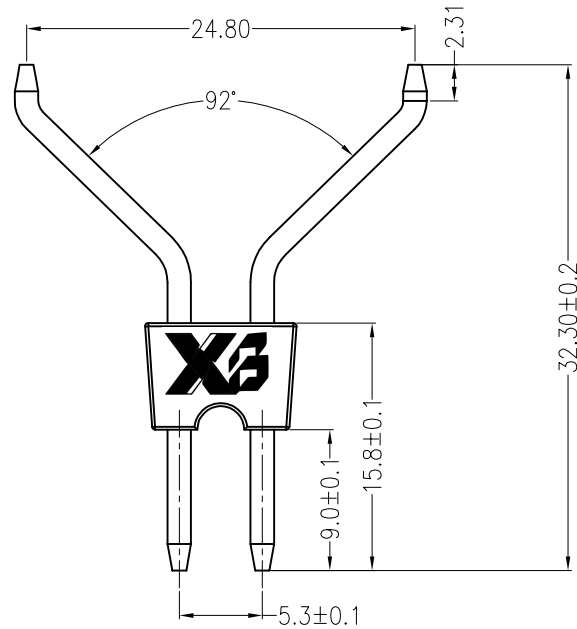

Board Layout

主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 3.0A AC DC

耐 电 压 (Withstand Voltage): 1800V AC/minute


温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L025-02-B1MG-P-A	
PART No. _____	SPECIAL CODE: A=The client code
No. FOR CIRCUITS: _____	PACKAGING: P=PE
02	PLATING: G=Ni
PLASTIC MATERIAL: _____	
B1M=PA46 (BEIGE)	

3


3

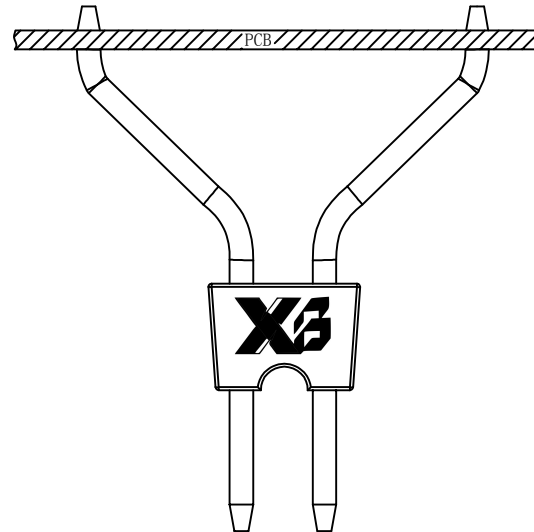

Assembly Layout

4

4

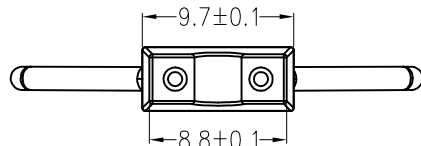

5

C				
B	CONTACT	2 PCS	Brass	Ni-plated
A	PEDESTAL	1 PCS	PA46	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
 东莞市溪榜电子有限公司		TITLE: -		
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD		5.3mmPITCH 180°		
X.±0.5	X.±5°	USE:	PART NO.:	
.X±0.3	.X±2°	CUSTOMER	L025-02-B1MG-P-A	
.XX±0.25	.XX±1°	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	GCCP-0046	
	UNITS: mm	DR: 蒋建银	SCALE 1 : 1	SHEET 1 / 1

A

B

C

D

E

F