

A

B




C

D

E

F

REV	ECN No.	DESCRIPTION	DESIGN	DATE
A1		Release	-	2018.11.07

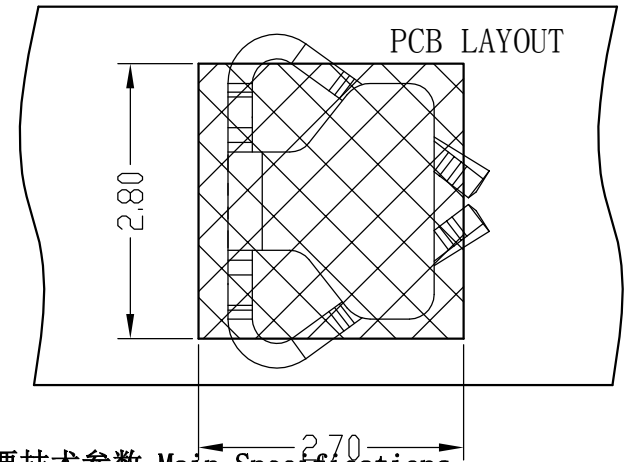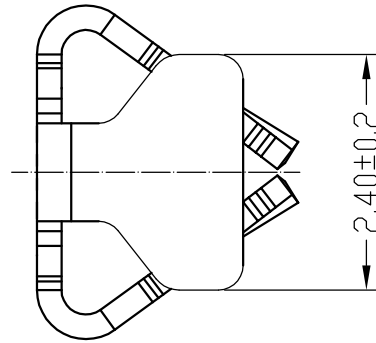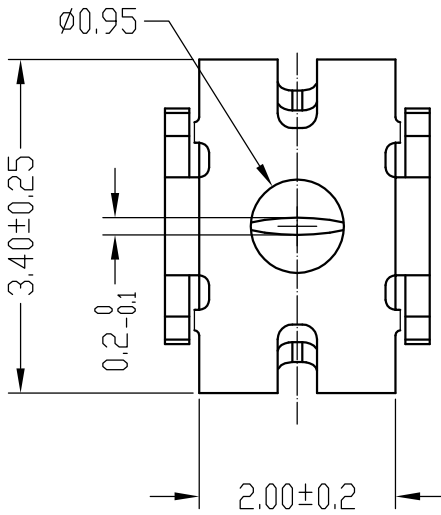

主要技术参数 Main Specifications

线 数 (Poles): 01

接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$

额定电压 (Rated voltage): 275V AC DC

额定电流 (Rated current): 1.0A AC DC

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

ORDER INFORMATION:

XB- L079K-01-000B1-R

PART No.

No. FOR CIRCUITS:

01

PLASTIC MATERIAL:

000=No plastic parts

PACKAGING:




R=REEL

METAL CODE:

1=PhosphorBronze

PLATING:

B=MATTE Sn

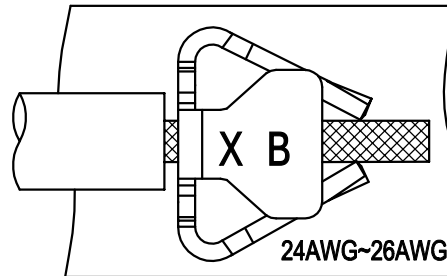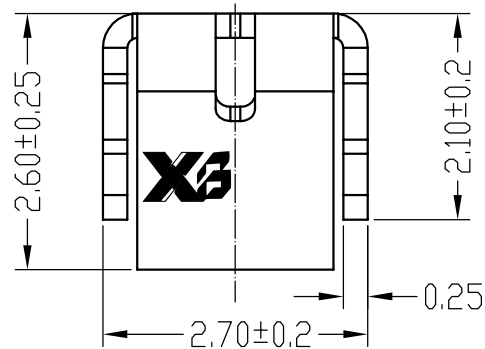

A	CONTACT		1 PCS	PhosphorBronze	MATTE Sn-plated
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
XB 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD			TITLE: -		
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:		
.X±0.3	.X±2'		L079K-01-000B1-R		
.XX±0.25	.XX±1'		DWG NO.:		
--	--	CHKD: 田峰	GCCP-1125		
⊕	UNITS: mm	DR: 蒋建银	SCALE 1 : 1		SHEET 1 / 1