


RoHS
Compliant


ZONE	SYMBOL	REVISION	APPROVAL	DATE
A		INITIAL	Lucky	06/20/20'

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IP67;

3D VIEW

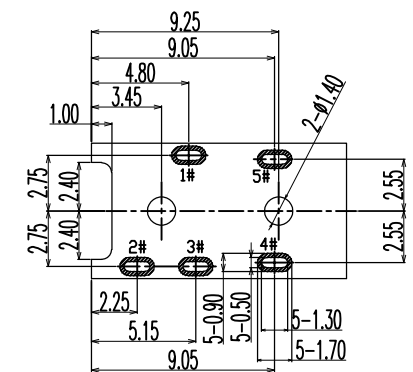


P.C.B LAYOUT T=1.00mm
TOP VIEW

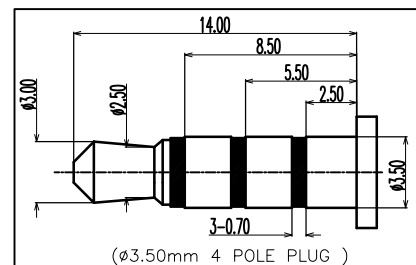

(ø3.50mm 4 POLE PLUG)

⑦	Contact_5	⑤	1	Copper Alloy	NICKEL UNDER PLATING OVERALL,GOLD FLASH PLATING ON SOLDER AREA ;GOLD FLASH PLATING ON CONTACT AREA	T=0.20mm
⑥	Contact_4	④	1	Copper Alloy		T=0.20mm
⑤	Contact_3	③	1	Copper Alloy		T=0.20mm
④	Contact_2	②	1	Copper Alloy		T=0.20mm
③	Contact_1	①	1	STAINLESS STEEL		T=0.20mm
②	Separator		1	HIGH TEMP	BLACK,UL94V-0	
①	Housing		1	HIGH TEMP	BLACK,UL94V-0	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK	

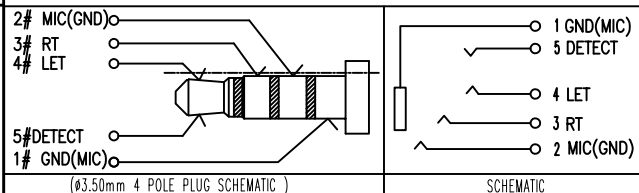

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	3.5MM STEREO JACK	TOLERANCE UNLESS OTHERWISE SPECIFIED:	0.0±0.2 0.00±0.1 0.000±0.05	UNIT: mm	DRAWING:	Lucky	DATE	2020.20.06	SCALE	5:1
PART NO.	XB-23004-05DBAP-A				CHECK:	liao Y K	DATE	2020.20.06	MATERIAL	*
					APPROVAL:	Abel	DATE	2020.20.06	DWG. no.	A
					DRAWING NO.	XB-1830-CP-001			SHEET	1/1

DCF-04/A