


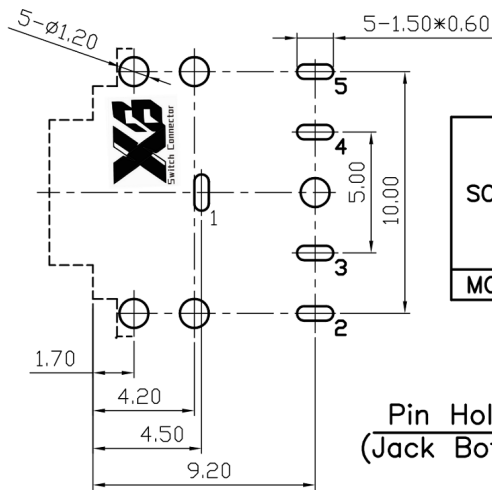
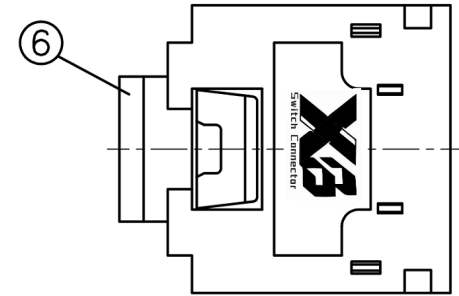
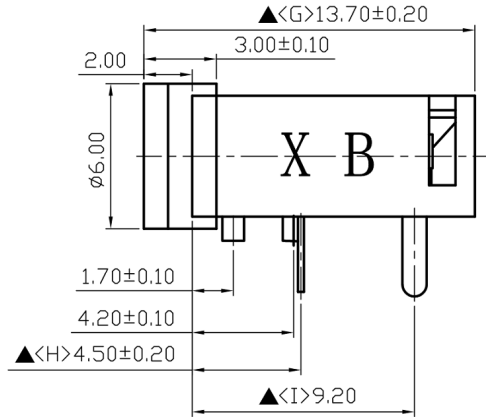


CAD FILE:

ROHS

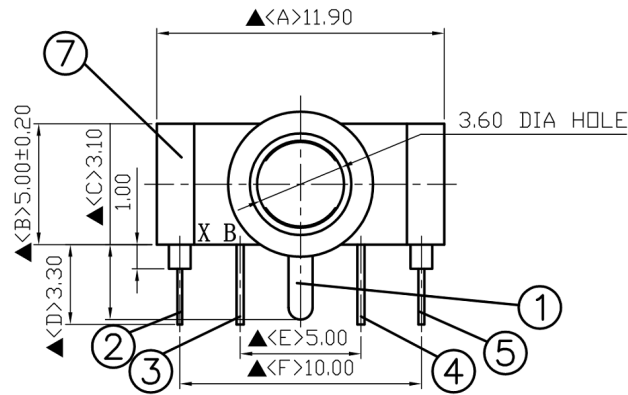

	MATERIAL	PLATING
terminal 1	Phosphor Bronze	tin
terminal 2	Phosphor Bronze	tin
terminal 3	Phosphor Bronze	tin
terminal 4	Brass	tin
terminal 5	Brass	tin
plastic	Pbt	

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

7	Housing	PBT	1	Black Color
6	Barrel	Brass	1	Nickel Plated
5	Tip Spring	0.25T TicuR1-M-EH	1	Silver Plated
4	Break Terminal	0.3T Brass	1	Silver Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Ring Spring	0.2T TicuR1-M-EH	1	Silver Plated
1	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : Audio Jack			UNIT : mm	DRWG NO.: XB-PJ-307X5P-T
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-PJ-307X5P-T			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D DONG. PANG 2012-9-25	
1	KNOB	PPA	1	BLACK	APPD. ZENQ. CHEN 2012-9-25				
NO.	PARTS	MATERIALS	Q'TY	FINISH					