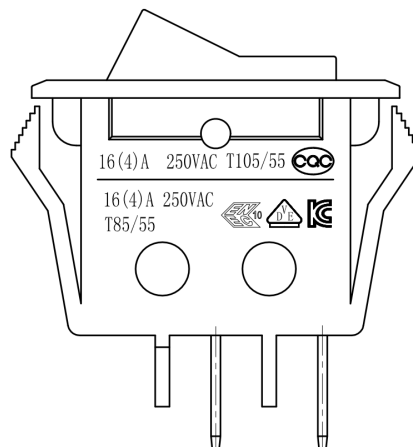
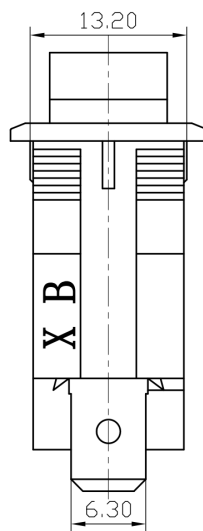
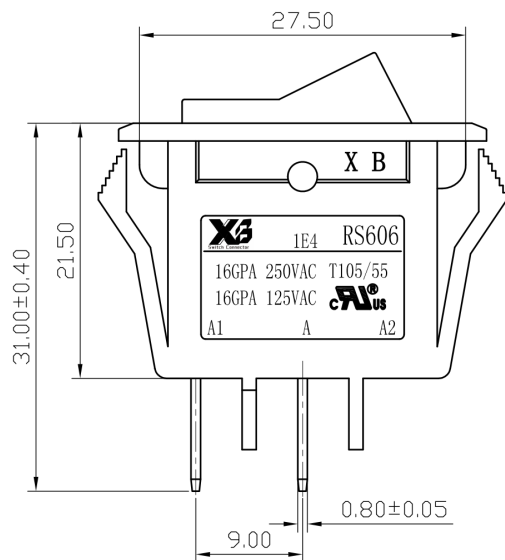


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	13.30~13.40	28.9~29.1
1.25~2.00	13.30~13.40	29.1~29.2

NOTES:

1. Rating:

KC 16(4)A 250V AC T85/55
VDE ENEC 16(4)A 250V AC T85/55
CQC 16(4)A 250V AC T105/55
UL cUL 16GPA 125V AC/16GPA 250V AC T105/55

2. Circuit Diagram: 2P ON-OFF

3. Terminal Strength: ≥80N


4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min Terminals to Button: 3000VAC 1min Leakage Current: 1mA


6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

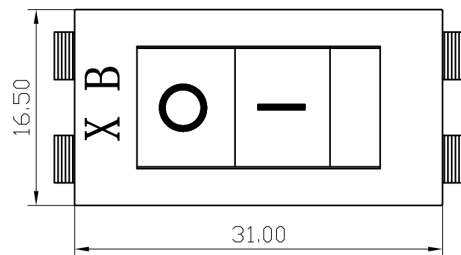

SWITCHING CIRCUIT



7	基座	1	环保阻燃PA66		
6	弯端	1	0.8mm黄铜带 +复合银触点	镀锡	
5	中端	1	0.8mm黄铜带	镀锡	
4	接触桥	1	0.8mm黄铜带 +复合银触点	镀银	
3	套管	1	0.3mm拉伸钢	镀镍	
2	弹簧	1	∅0.40弹簧钢丝	发黑	
1	按钮	1	环保阻燃PA66		
序号	名称	数量	材料	处理	备注

A4				普通公差:		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	跳板开关	比 例	Free
				ABOVE 5 TO 30	±0.30	UNIT		PROJECTED		PRODUCT NAME			
A1				ABOVE 30	±0.50	绘 图	高鹏	核 对	贺龙飞	型 号	RS606		
						DRAWN BY		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期	2023. 10. 16	核 准	路建宏	图 号	RS606A-1010012BBB-3A		
						DATE		APPROVAL BY		DWG NO.			