
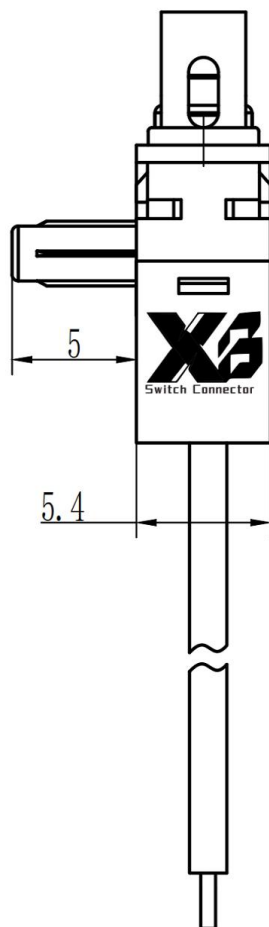



CAD FILE:

Waterproof IP67

ROHS

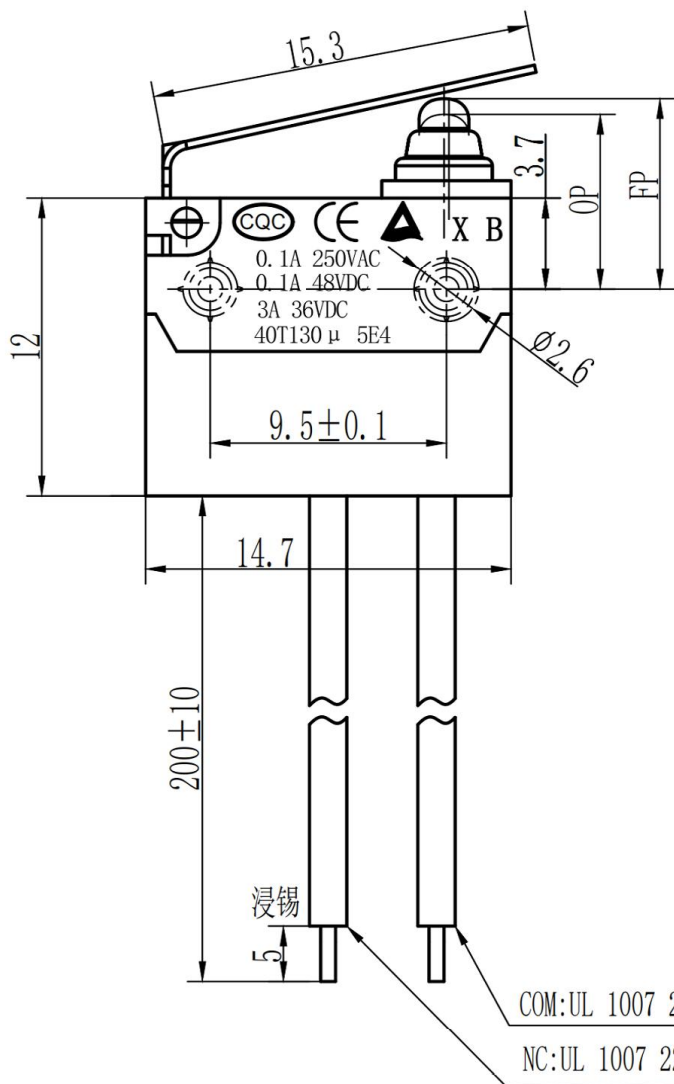

3. 电路简图



2. 认证



0.1A 125/250VAC
0.1A 48VDC
3A 12VDC
40T130 μ 1E5



0.1A 250VAC
0.1A 48VDC
3A 36VDC
40T130 μ 5E4

1. 技术参数(Technical Parameters)

序号	主要技术参数(Main Technical Parameters)
1	电气额定值(Electrical Rating): 0.1A 125/250VAC;3A/12VDC
2	环境温度(Ambient temperature): 40T125
3	电气寿命(Electrical lifetime): 5E4 cycles
4	操作力(Operating force): 2.5N(Max)压杆外端
5	自由位置(Free position): 7.7±0.3mm (推动子上测)
6	动作位置(OP): 7.2±0.5mm (推动子上测)
7	接触电阻(Contact Resistance): ≤100mΩ(不含电线)
8	耐压(Withstand Voltage): 脚与脚500V/60S/5mA, 脚与壳1500V/60S/5mA
9	绝缘电阻(Insulation Resistance): ≥100MΩ(Test Voltage 500VDC)
10	防护等级: IP67

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8									
7									
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-FSK-20-D180
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-FSK-20-D180			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25