
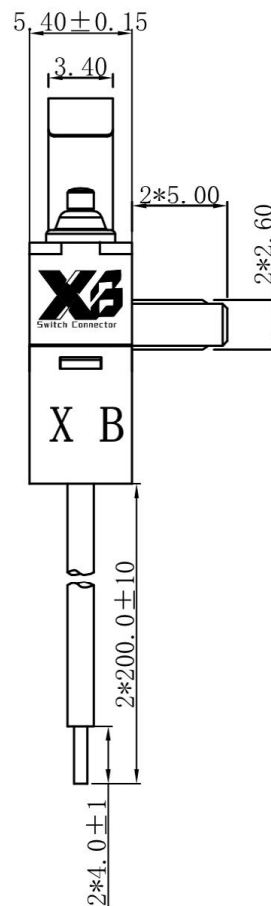
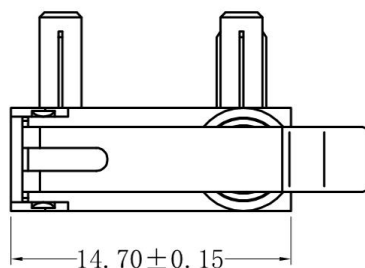



CAD FILE:

Waterproof IP67

ROHS

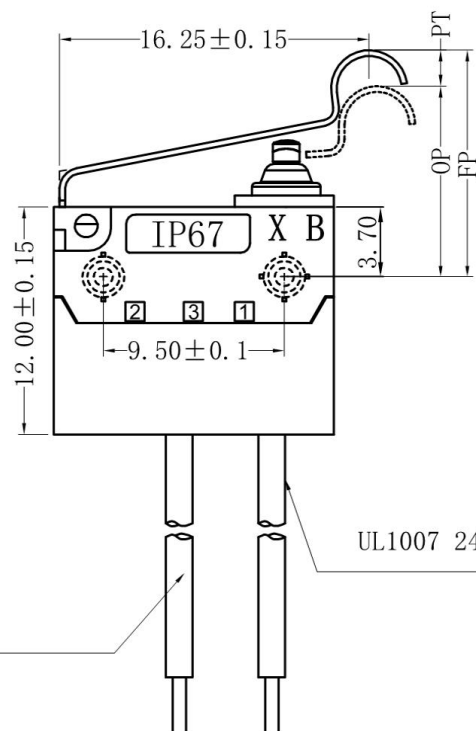

Circuit Diagram



ELECTRICAL DATA	
RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES

MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP	-25℃ ~ +85℃
WATERPROOF	IP67

CHARACTERISITICS	
OPERATING FORCE操作力 (OF) :	180gf Max.
RELEASE FORCE回复力 (RF) :	20gf Min.
OPERATING POSITION操作位置 (OP) :	10.7 ± 0.7 mm.
PRE TRAVEL行程 (PT) :	3.8mm Max.
DIFFERENTIAL TRAVEL差程 (DT) :	0.7mm Max.
FREE POSITION自由位置 (FP) :	13.5mm Max.

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ.CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.: XB-FSK-H3-A3-1B05W16
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-FSK-H3-A3-1B05W16			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				