



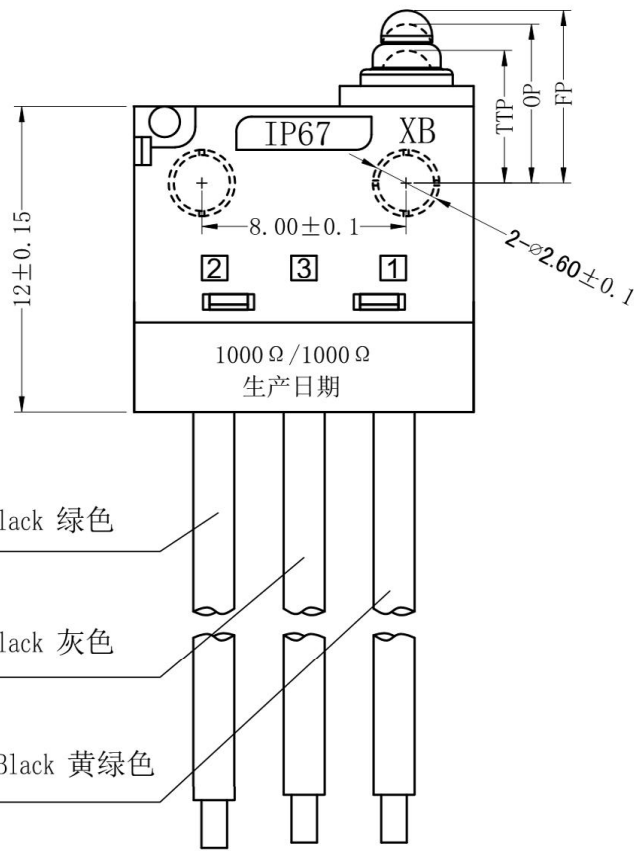


NC: UL1007 24AWG Black 绿色

NO: UL1007 24AWG Black 灰色


COM: UL1007 24AWG Black 黄绿色

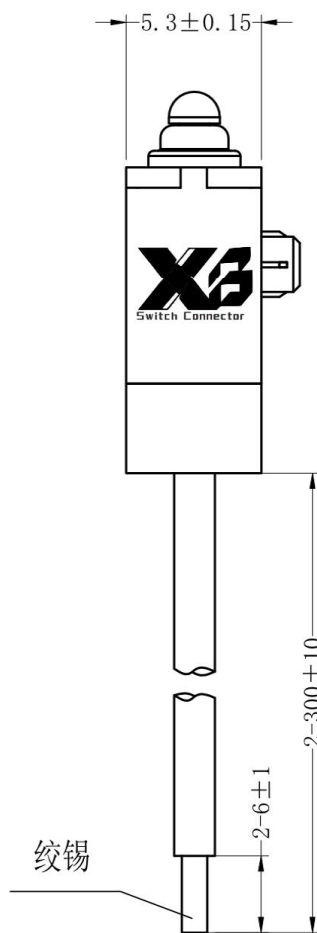

绞锡

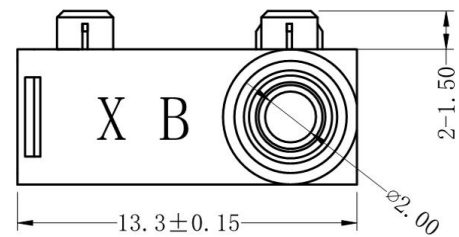

Circuit Diagram

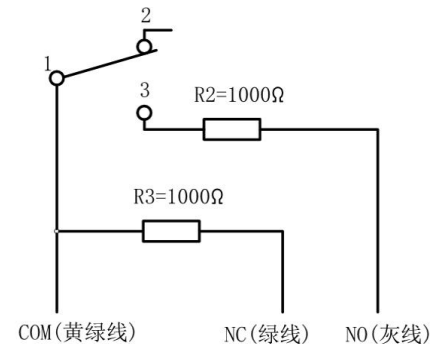

CHARACTERISITICS	
OPERATING FORCE(OF):	130gf Max.
RELEASE FORCE(RF):	30gf Min.
OPERATING POSITION:	6.4±0.3mm.
TOTAL TRAVEL POSITION:	5.4mm Max.
DIFFERENTIAL TRAVEL:	0.25mm Max.
FREE POSITION:	7.20mm Max.

说明:

1、黄绿与灰线之间:自然状态时:电阻为无穷大;当开关被按压时:电阻为1000Ω

黄绿与绿线之间:开关自然状态或被按压时:电阻都为1000Ω

绿线与灰线之间:自然状态时:电阻为无穷大;当开关被按压时:电阻为2000Ω

2、电阻精度1%

3、COM: 黄绿线; NO: 灰线; NC: 绿线;

4、靠LOGO面激光打印: 1000Ω/1000Ω 和 生产日期

ELECTRICAL DATA	
RATING	OPERATING LIFE
3A 12VDC	100,000 CYCLES
0.1A 48VDC 125/250VAC	100,000 CYCLES

MECHANICAL LIFE	500,000 CYCLES
GAP TYPE	MICRO
OPERATING TEMP	-25℃~+85℃
WATERPROOF	IP67

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : XB Micro Switch			UNIT : mm	DRWG NO.:XB-FSK-H3-D13-1D00W1
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-FSK-H3-D13-1D00W1			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONI CS CO., LTD.				