
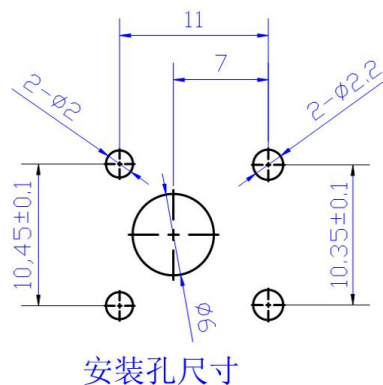
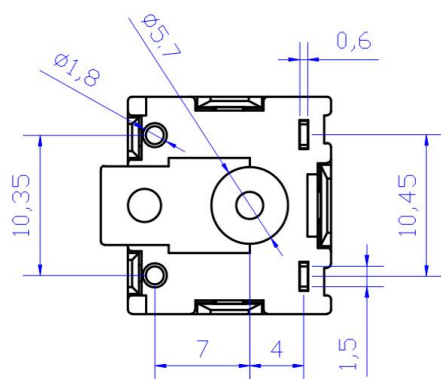
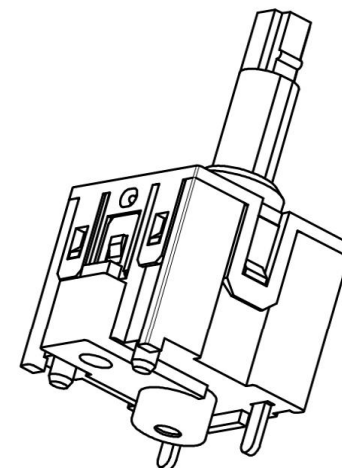
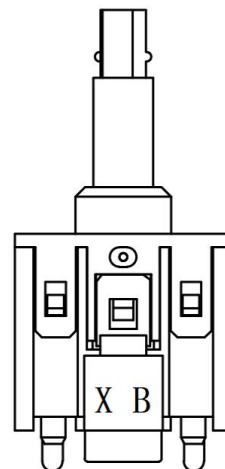
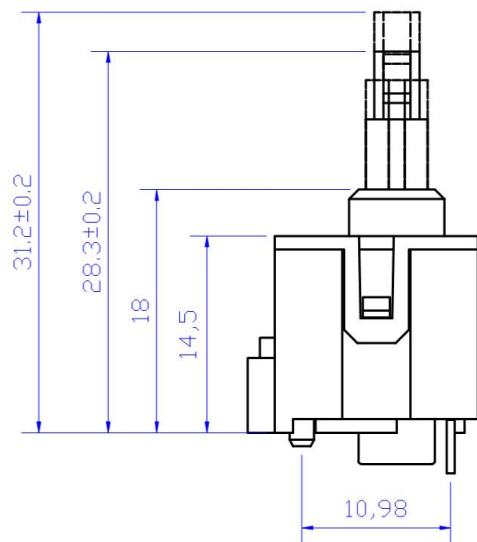


CAD FILE:

ROHS

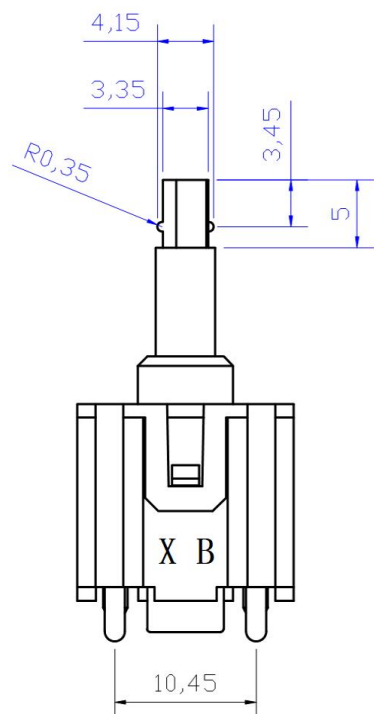

技术要求:

1. 开关动作灵活, 无卡滞现象
2. 工作额定电压: DC 12V 3A
3. 操作力: 7 ± 2 N
4. 电寿命 ≥ 30000 次

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ± 0.1 mm	A	2012-9-25	初 版		ZENQ. CHEN
5					OVER 1.5mm : ± 0.2 mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : BUTTON SWITCH			UNIT : mm	DRWG NO.:	
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL:			SCALE: 5:1	DWN.	JUN. YANG
2	COVER	STEEL STRIP	1	Ni PLATED						2012-9-25
1	KNOB	PPA	1	BLACK						
NO.	PARTS	MATERIALS	Q'TY	FINISH						
					东莞市溪榜电子有限公司			CHK'D	DONG. PANG	2012-9-25
					DONG GUAN XI BANG ELECTRONICS CO., LTD.			APPD.	ZENQ. CHEN	2012-9-25