
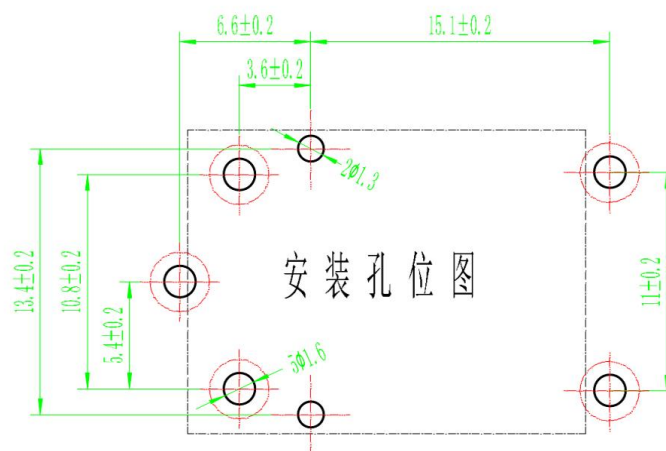
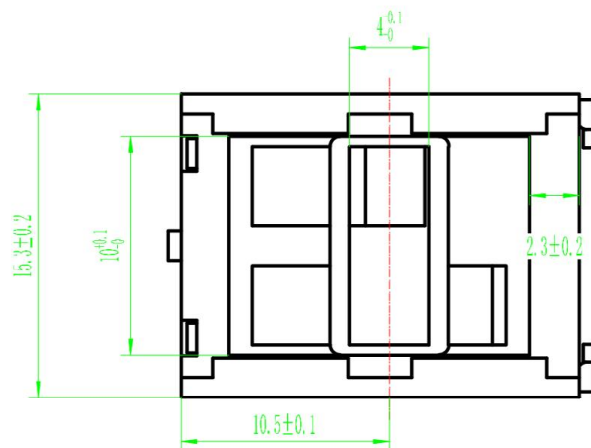
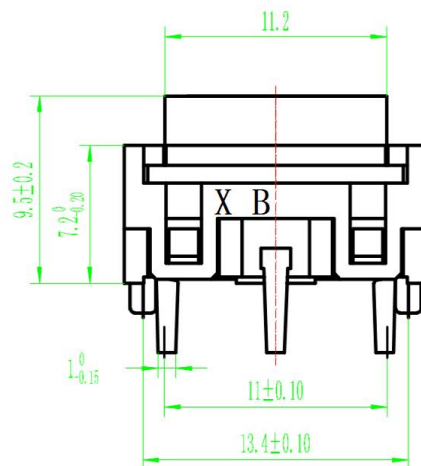


CAD FILE:

ROHS

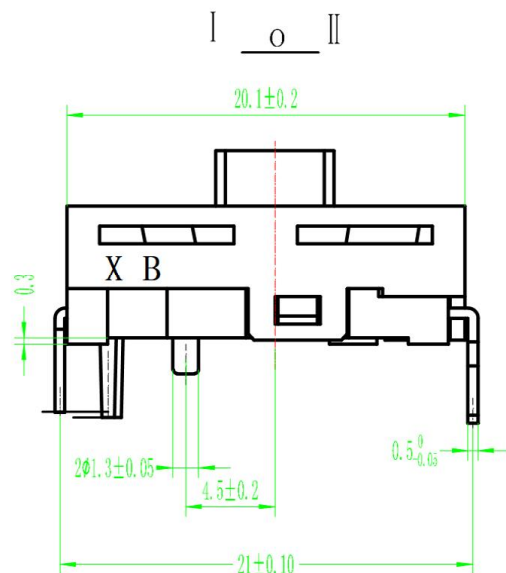

技术要求

- 开关动作灵活, 无卡滞现象;
- 开关耐压:
 - 同极间 (断开时) 1000V AC(50Hz)1min;
 - 极与壳体之间2000V AC(50Hz)1min;
- 工作额定值:DC 12V 5A;
- 接触电阻 $\leq 20\text{m}\Omega$;
- 电寿命 ≥ 30000 次;

工作原理图

档位 \ 接脚	①	②	③	④	⑤
0		○	○	○	○
I	○	○	○	○	○
II	○	○	○	○	○

动作行程

档位	动作行程	极限行程	动作力
0—I	1.1±0.3	2.2	3±1N
0—II	1.1±0.3	2.2	3±1N

8					TOLERANCE				
7					UNLESS SPECIFIED				
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版	ZENQ. CHEN
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	CONTACT	SUS	1	Ag CLAD	TITLE : MICRO SWITCH			UNIT : mm	DRWG NO.: XB-P01-F4
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-P01-F4			SCALE: 5:1	DWN. JUN. YANG 2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	DONG. PANG 2012-9-25
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN 2012-9-25
NO.	PARTS	MATERIALS	Q'TY	FINISH					