






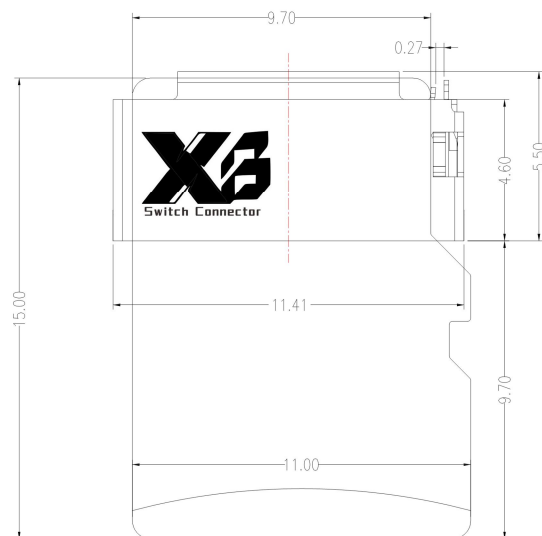


SD-TF03-1108x-S267

	DIM	A
5	3.00	
6	3.35	
7	3.75	

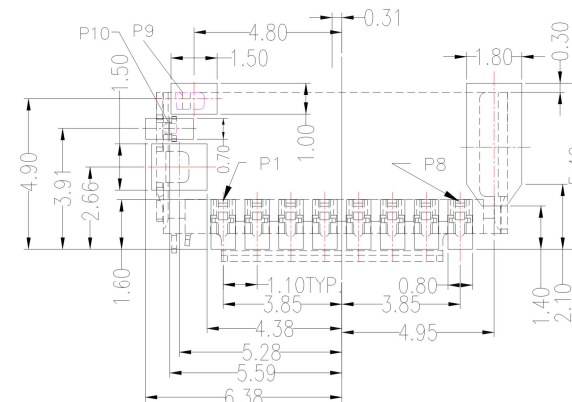

PCB LAYOYT

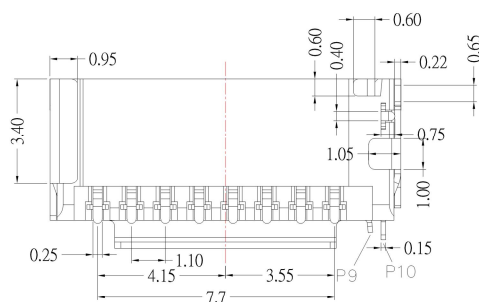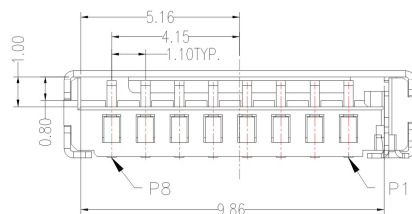

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1
9	CD1
10	CD2

SPECIFICATION

Electrical :

- 1.Contact Resistance: 50 m Ω Max.
- 2.Insulation Resistance: 1000 M Ω Min.
- 3.Dielectric Withstanding Voltage: 500V RMS.
- 4.Life Cycles: 1500 cycles Min
- 5.Mate Force: 4.5kgf Max
- 6.Unmate Force: 0.5kgf Min

Environmental:

- 1.Operating Temperature: -25°C ~ +85°C.

7	更新高度選項	Jack	102517
6	更新高度選項	Jack	011617
5	新增尺寸	Jack	011217
4	PCB新增偵測pin 標示	Jack	121216
3	新增偵測pin 標示	Jack	120816
2	更新高度選項	Jack	120516
1	更新高度選項	Jack	102016
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	10/25/17			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SD 卡 短體帶偵測PIN
Jacky Chen	10/25/17			
APPROVED BY:	DATE	SCALE	DWG NO.	SD-TF03-1108x-S267
Tony Kao	10/25/17	1 : 1		
		SHEET NO.	1 of 1	PART NO. SD-TF03-1108x-S267
				SIZE A4
				VER R7