

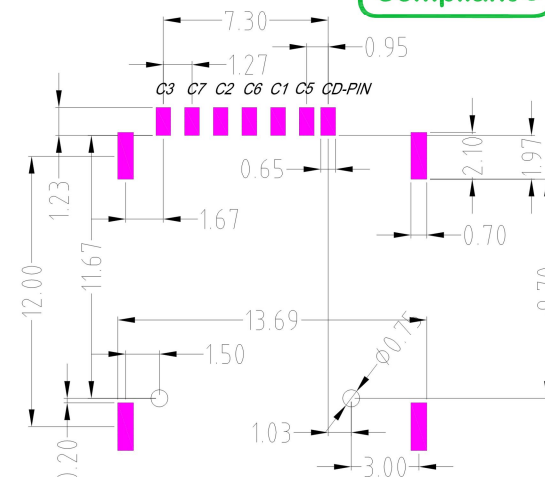
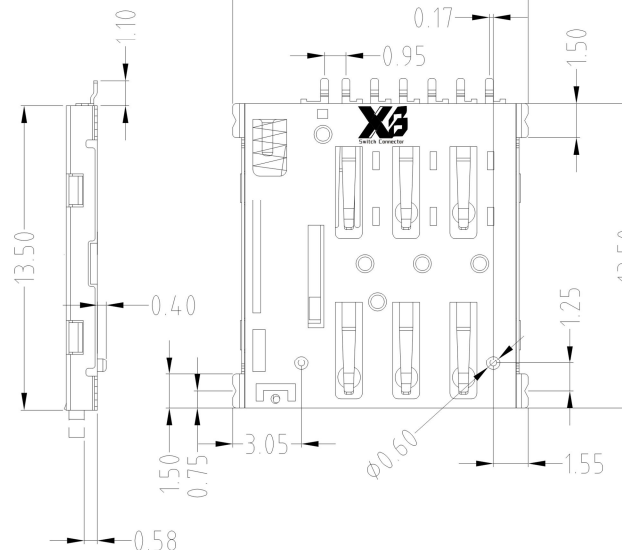
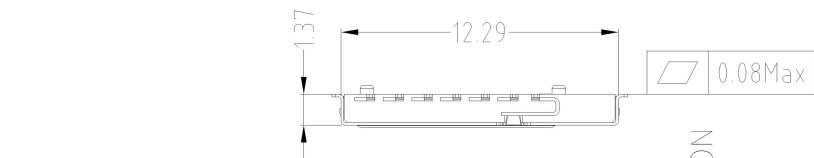
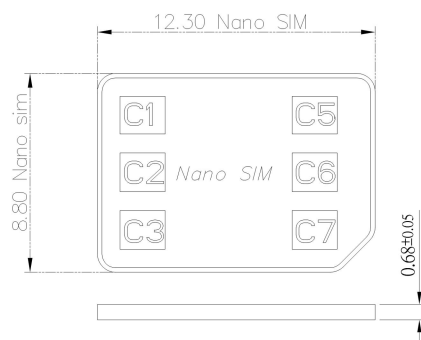


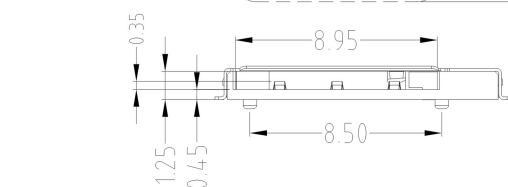

PCB LAYOYT

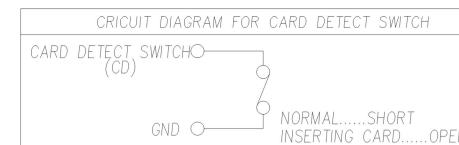

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

SPECIFICATION

Electrical :

- 1.Current Rating: 0.5mA AC/DC
- 2.Voltage Rating: 125V AC/DC
- 3.Contact Resistance: 100 mΩ Max.
- 4.Insulation Resistance: 1000 MΩ Min.

Environmental:

- 1.Operating Temperature: -20°C ~ +60°C.

Material:

- 1.Housing: LCP
- 2.Contact: Phosphor Bronze
- 3.Shell: Stainless Steel

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
CHECKED BY: Jacky Chen
APPROVED BY: Tony Kao

DATE: 11/15/22
DATE: 11/15/22
DATE: 11/15/22

MAT'L
FINISH
SCALE

1 : 1

SHEET NO. 1 of 1

TITLE
MODLE
DWG NO.

CONNECTOR
NANO SIM PUSH 1.37H 帶CD PIN
NSIM-510010632S-S267

PART NO. NSIM-510010632S-S267

SIZE
A4
VER
R3

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新Contact材質	Jack	111522
2	更新料號	Jack	081822
1	更新料號	Jack	050522