

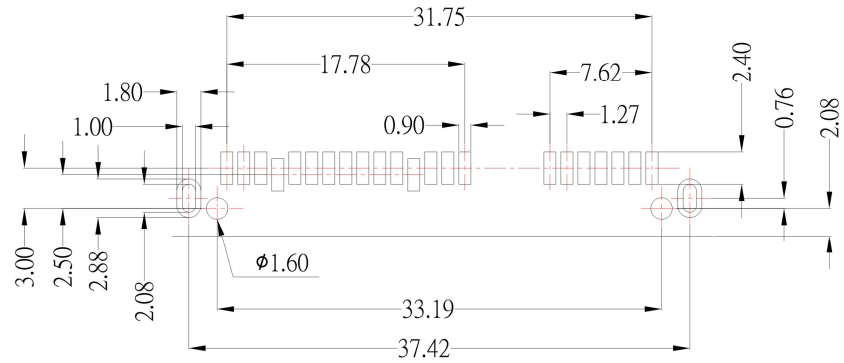


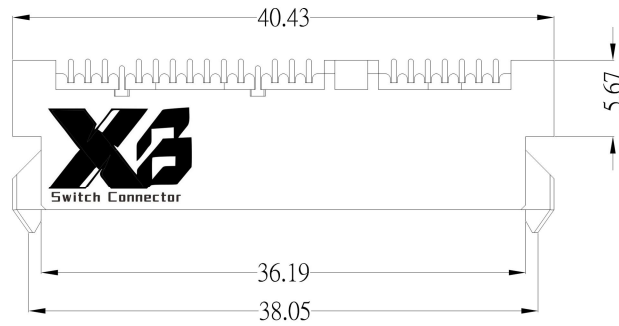




RECOMMENDED PCB LAYOUT

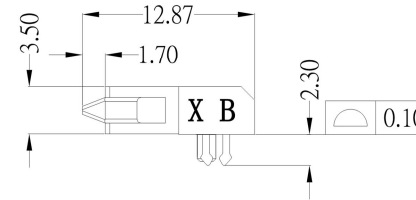

SATA-F22-35S-x-S268

鍍層厚度:

Blank : 1u"
2 : 15u"
3 : 30u"

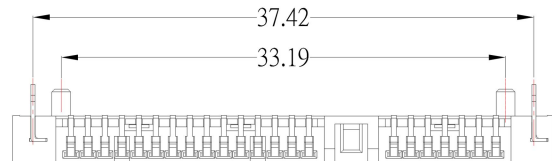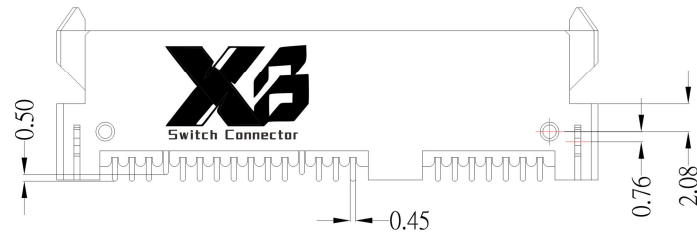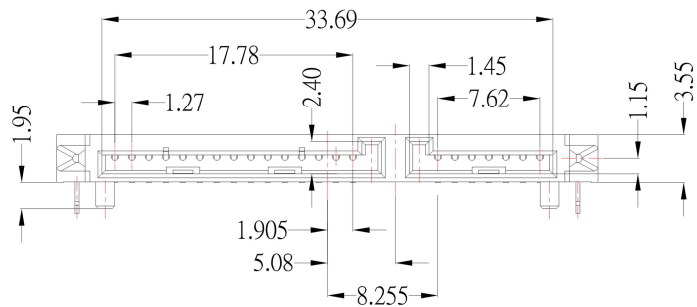

SPECIFICATION:

1.MATERIAL:

- 1.1 HOUSING: LCP , UL 94V-0 , Black.
- 1.2 CONTACT: PHOSPHOR BRONZE
- 1.3 BOARD: BRASS

2.Finish:

- 2.1 CONTACT: PLATED TIN IN MATING AREA ;
TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
- 2.2 BOARD: TIN PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	04/01/15	FINISH	MODLE	SATA 7+15P Female R/A板下 SMT
CHECKED BY:	DATE	SCALE	DWG NO.	H:3.55mm
Jacky Chen	04/01/15	1 : 1	SATA-F22-35S-x-S268	SIZE A4
APPROVED BY:	DATE	SHEET NO.	PART NO.	VER
Tony Kao	04/01/15	1 of 1	SATA-F22-35S-x-S268	A0

1	新增鍍層選項及更新為A0版	Jack	040115
ITEM NO.	DESCRIPTION	DRAWN	DATE