
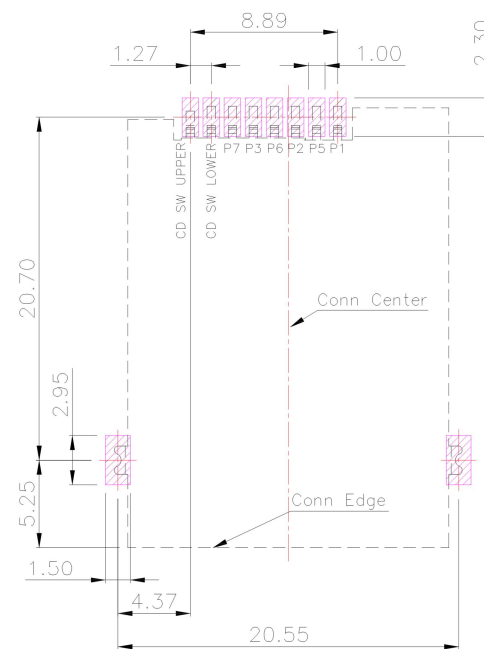


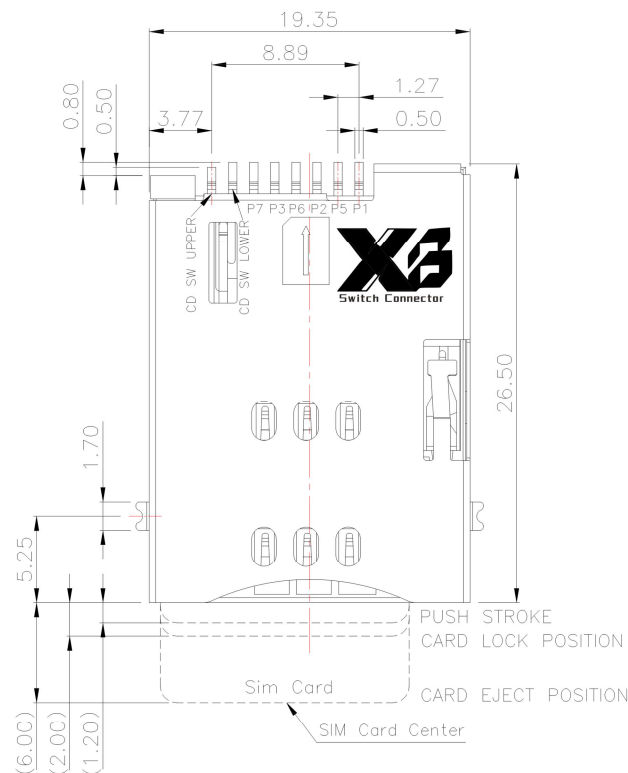


P.C.B LAYOUT MOUNTING PATTERN
TOP VIEW

MATERIALS:


1. HOUSING : THERMOPLASTIC (UL 94V-0).
 2. TERMINAL : COPPER ALLOY
 3. SHELL : SUS
- Finish:
1. Finish: CONTACT: PLATED GOLD IN MATING AREA ;
GOLD PLATED ON SOLDER BALLS ;
NICKEL UNDER PLATED OVERALL
 2. SHELL: NICKEL UNDER PLATED SURFACE LAYER

SPECIFICATION:

1. CURRENT RATING : 0.5 A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR 1 MINUTE.
3. INSULATION RESISTANCE : 1000M Ω MIN.
4. CONTACT RESISTANCE : 100m Ω MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.



CONNECTOR TERMINAL NO.	Pin NO.
Pin 1	VCC:PWR SIGNAL AND GND
Pin 2	RST:RESET SIGNAL
Pin 3	CLK:CLOCKING SIGNAL
Pin 5	GND:PWR SIGNAL AND GND
Pin 6	VPP:PROGRAMMING VOLTAGE
Pin 7	I/O:SERIAL DATA INPUT/OUTPUT

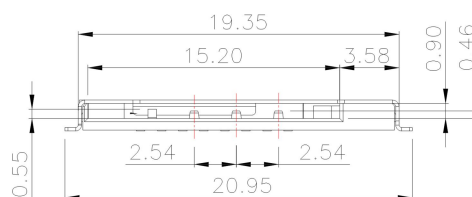

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	08/31/18			
CHECKED BY:	DATE	FINISH	MODLE	SIM Card Connector 6pin push / 帶偵測pin
Jacky Chen	08/31/18			
APPROVED BY:	DATE	SCALE	DWG NO.	SIM-510010615S-S312
Tony Kao	08/31/18	1 : 1	PART NO.	SIM-510010615S-S312
		SHEET NO.	1 of 1	VER A0

ITEM NO.	DESCRIPTION	DRAWN	DATE
3	更新為A0版	Jack	083118
2	更新尺寸標示	Jack	080318
1	更新尺寸	Jack	062017