

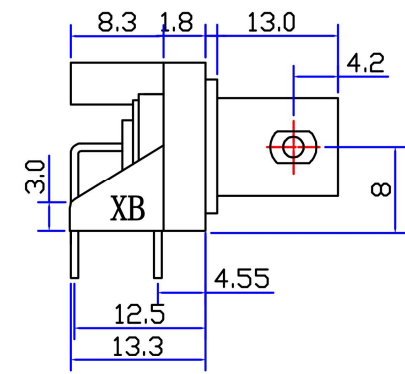
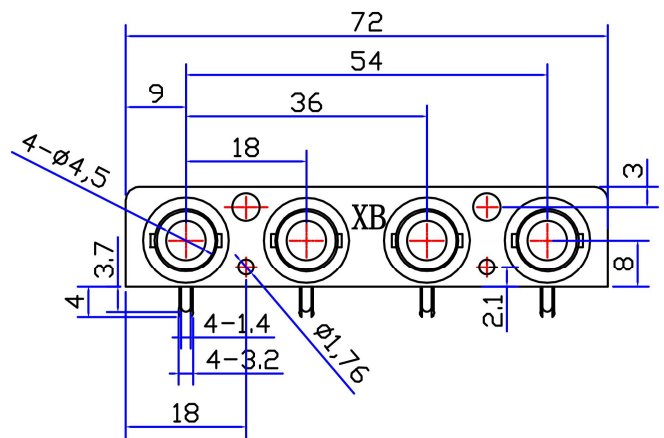



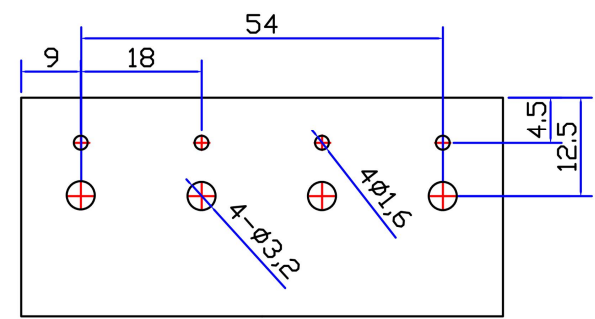


Customer NO:		XB-801-0009			
REV	DESCRIPTION	DWN	DATE	APPROVEN	
A	First issue	Mr. chen	2016/3/03	John kine	
B					

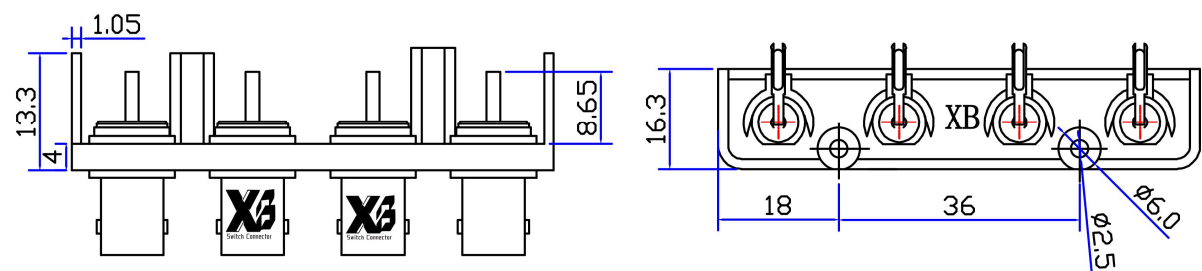

Specifications:

IMPEDANCE: 50 Ohms
Frequency range: 0~3GHz
VSWR: 1.5MAX
Working voltage: 500V rms @ sea level
Insulation resistance: 5000 Ohms min
Temperature range: -55°C TO +155°C
Relative temperature: ≤95% (40° C ± 2° C)

1	BODY	Zinc	NICKEL	4	NOTE:	Tolerance	X.	±0.15	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
2	SOLDEI COLUMN	Iron	NICKEL	4			X. X	±0.10		
3	IRON PLATES	Iron	NICKEL	1			X. XX	±0.05		
4	PIN	Brass	NICKEL	4			Angular	±5°		
5	INSULATOR	POM	White	4	DRAWN	View			Name: BNC Jack 1*4 Port 90° PCB Mount	
6	PANEL	PBT/ABS	Black	1	Zelin. chen					
7					CHECKED					
8										
9						UNIT	MM		SIZE	Product NO.
10									A	XB-801-0009
NO	Component Number	Material	Finish	QTY	APPROVALS	SCALE	1:1		DateTime	CAD FILE
					John				2016/3/03	H/company drawings/BD
										SHEET: 1 OF 1