
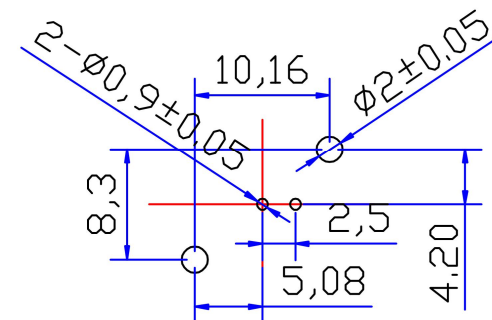

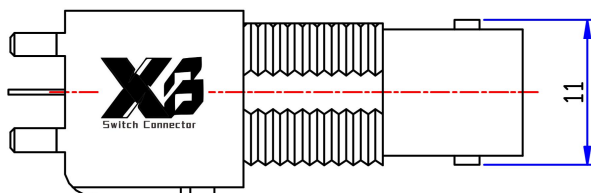

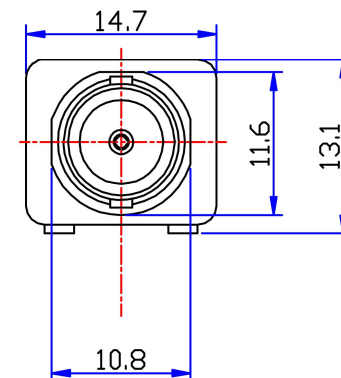
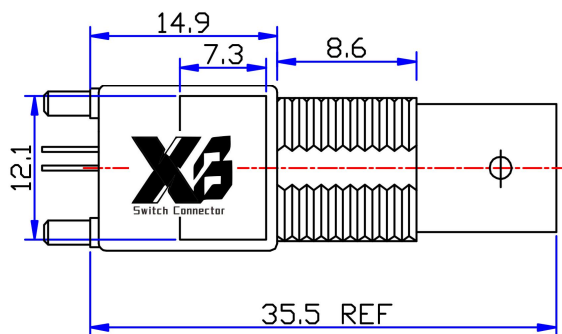




SPECIFICATIONS:

Impedance: 75 Ohms

Frequency Range:DC~3G

VSWR:1.3max

Working Voltage:500v RMS @ SEA level

Insulation Resistance:5000 Ohms min

Temperature Range:-55℃ TO +155℃

Drawings products are in line with ROHS standards

PCB HOLE CONFIGURATION
RECOMMENDED PANEL CUTOUTS

LOCK WASHER BRASS NICKEL

HEX NUT BRASS NICKEL

INSULATOR POM NONE

CONTACT PLATING BRASS GOLD

BODY ZINC NICKEL


DESCRIPTION MATERIAL FINISHED QTY

NOTE:

Tolerance

X. ±0.15
X.X ±0.10
X.XX ±0.05
Angular ±5°

View



UNIT

MM

SCALE

1:1

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC JACK FOR PCB CONNECTOR

SIZE A Product NO. XB-801-0033

DateTime 2015/05/19

CAD FILE H/company drawings/BD

SHEET: 1 OF 1

APPROVALS