
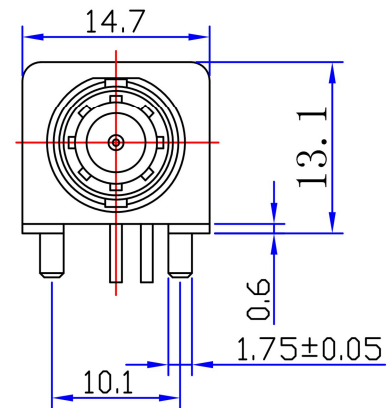
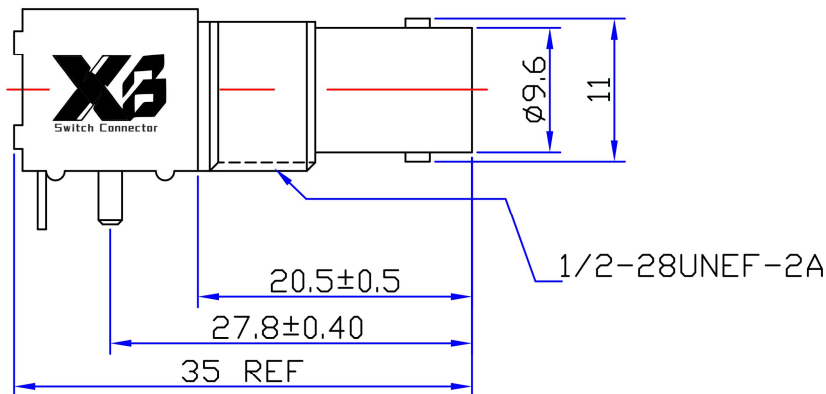
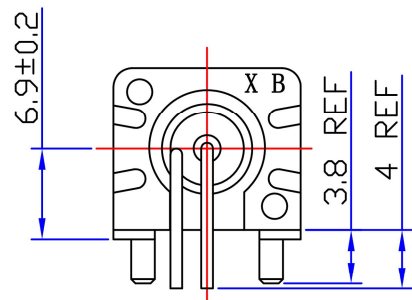


LOCK WASHER

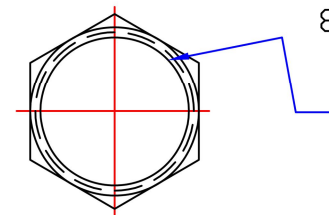

1/2-28UNEF-2B
CLAMP NUT

Specification:

Impedance: 50 Ohms

VSWR:1.3MAX

Frequency range:DC~4G

Working Voltage:500V rms @ sea level


Insulation resistance:5000 Ohms min

Temperature range:-55℃ TO +155℃

Relative temperature:≤95%(40℃±2℃)

Drawings products are in line with ROHS standards.

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS:5.5MM
RECOMENDED MOUNTING TORQUE:
12 INCH-POUNDS MAX

1	Body	Zinc	NI:80-120u"	NOTE:	Tolerance	X.	±0.15	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD	Name: BNC Jack 90° PCB Mount					
2	Center contact	Brass	AU:1u"			X. X	±0.10							
3	Lead	Iron	AU:1u"			X. XX	±0.05							
4	Fixed footrest	Iron	NI:80-120u"			Angular	±5°							
5	Insulator	POM	White	DRAWN		UNITMM							SIZEAProduct NO. XB-801-0042REVASHEET: 1 OF 1	
6	Fixed mount	PBT	White	Zelin. Zhang										
7	Washer	IRON	NI:80-120u"	CHECKED										
8	Hex nut	Brass	NI:80-120u"											
9						DateTime2012/04/13CAD FILED/company drawings/BD							SHEET: 1 OF 1	
10				APPROVALS										
NO	Component Number	Material	Finish											
A		B		C		D		E		F		G		