


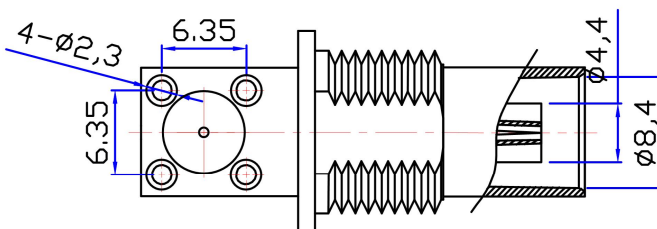




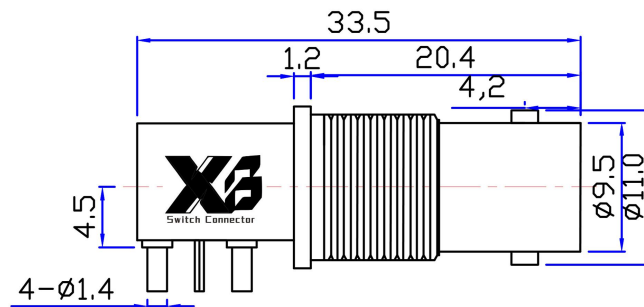

Product NO. XB-801-0082

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2018/04/19	John kine
B				

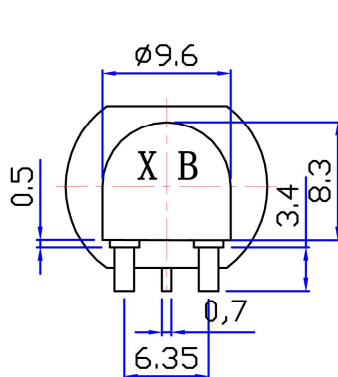

RECOMMENDED
MOUNTING HOLE

SPECIFICATIONS:

Impedance: 50 Ohms

Frequency Range:DC~6G

VSWR:1.3max

Working Voltage:500v RMS @ SEA level

Insulation Resistance:5000 Ohms min

Temperature Range:-55℃ T0 +155℃

Drawings products are in line with ROHS standards

1	Body	Zinc	TINNING
2	Contact pin	BRASS	Gold
3	Insulation	POM	WHITE
4			
5			
6			
7			
8			
9			
10			
NO	Component Number	Material	Finish

NOTE:


DRAWN
Zelin.CHEN
CHECKED

APPROVALS

Tolerance

X. ±0.15
X.X ±0.10
X.XX ±0.05
Angular ±5°

View



UNIT

MM

SCALE

1:1

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC R/A PCB JACK CONNECTOR

SIZE A Product NO. XB-801-0082

DateTime
2018/04/19

CAD FILE
H/company drawings/BD

SHEET: 1 OF 1