
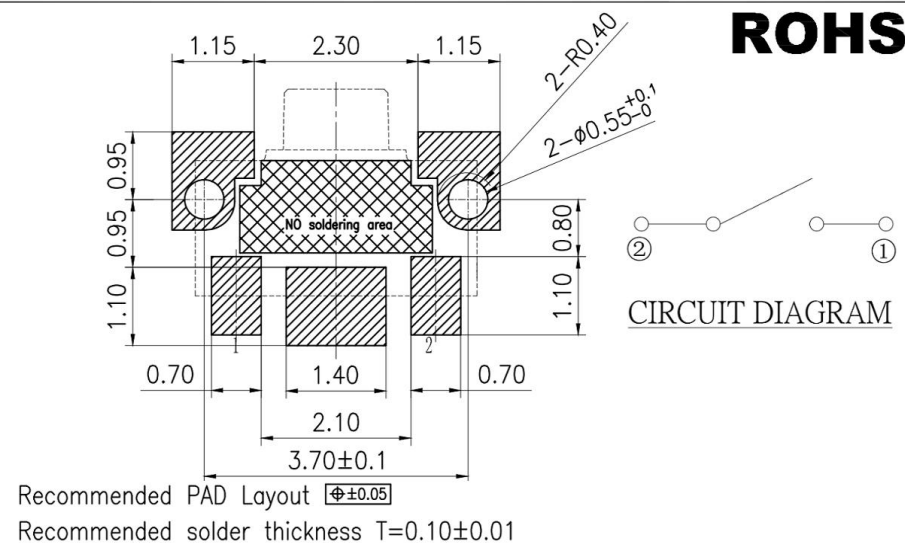


编带的透明带剥离强度标准:30~100gf



8	BOTTOM	1	LCP	BLACK
7	PLATED	1	PHOSPHOR BRONZE	Ag-Plate
6	SHELL	1	PHOSPHOR BRONZE	Ag-Plate
5	COVER	1	LCP	BLACK
4	FILM	1	PI	YELLOW
3	CONTACT	3	SUS	Ag-Plate
2	TERMINAL	2	PHOSPHOR BRONZE	Ag-Plate
1	HOUSING	1	LCP	BLACK
ITEM	PART NAME	Q'TY	MATERIAL	FINISH

1. RATING:DC 12V, 20mA Max
2. OPERATING FORCE: 160 ± 40 gf
3. TRAVEL: 0.15 ± 0.05 mm
4. LIFE: 200, 000cycles
5. PACKAGE: 4500Pcs/Reel

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5mm : ±0.1mm	A	2012-9-25	初 版		ZENQ. CHEN	
5					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
4	CONTACT	SUS	1	Ag CLAD	TITLE : Tact Switch			UNIT : mm	DRWG NO.: XB-TS-2040R		
3	CASE	PPA/BRASS SRTIP	1	BLACK/Ag PLATED	MODEL: XB-TS-2040R			SCALE: 5:1	DWN.	JUN. YANG	2012-9-25
2	COVER	STEEL STRIP	1	Ni PLATED	 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	DONG. PANG	2012-9-25	
1	KNOB	PPA	1	BLACK				APPD.	ZENQ. CHEN	2012-9-25	
NO.	PARTS	MATERIALS	Q'TY	FINISH							