
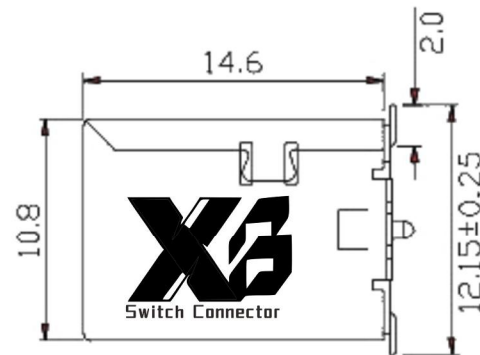


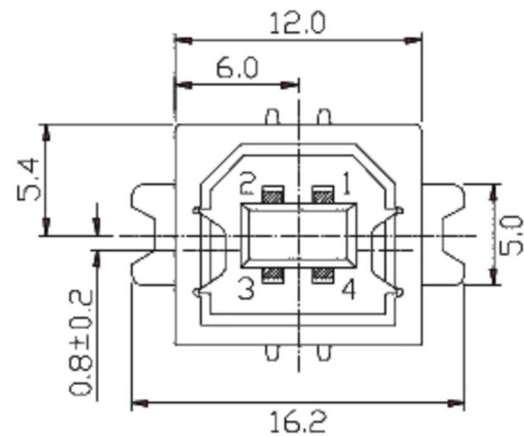

NOTES:

1.MATERIAL:

1.1 Housing:PBT ,UL94-HB

1.2 terminals:Copper Alloy

Gold plated in contact area:

Tin 40u"min plated in termination

Nickel Plated overall

1.3 Shell: Brass t=0.30mm,

Nickel 40u"min Plated overall

2.ELECTRICAL CHARACTERISTICS:

2.1 Rating Current :1.5 Ampere

2.2 Rating Voltage :30 V Max

2.3 Contact Resistance:30 Milli ohms

2.4 Insulation Resistance:1000 Mega ohms Min.

3.MECHANICAL CHARACTERISTICS:

3.1 Connector Mating force: 35N MAX(3.57Kgf)


3.2 Connector Unmating force:10N min(1.02Kgf)

3.3 Durability:1500Cycles.



4.ENVIRONMENT CHARACTERISTICS:

4.1 Operating temperature:-0℃ to +50℃

4.2 Storage temperature:-20℃ to +60℃

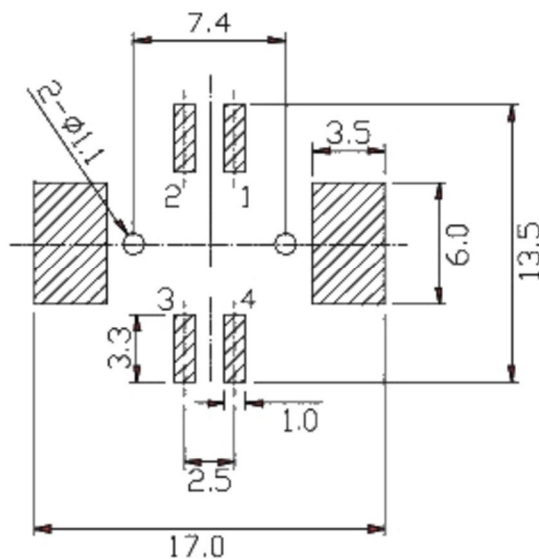

PCB LAYOUT
(COMPONENT SIDE)

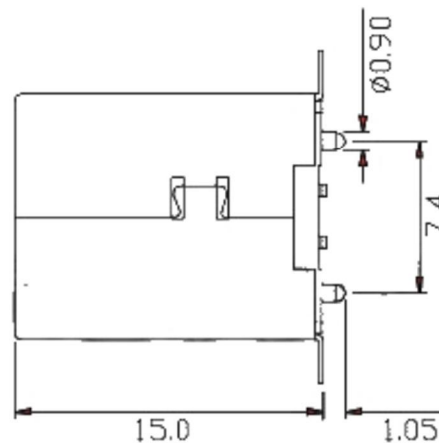

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.qdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:	USB 2.0		
DWN		VIEW:	PART NO.:	XB-SUB-110M		
CHKD		UNIT: mm/in	DWG NO.:			
APPD		SIZE: A4				
				WEIGHT	SHEET	REVISION
					1/1	A0