





RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

NOTE:

1. MATERIAL:
 - 1.1 HOUSING: PA9T, UL 94V-0
 - 1.2 TERMINAL: C2680
2. FINISH:
 - 2.1 TERMINAL: NICKEL 50 μ"MIN UNDER PLATED OVERALL, Au PLATED ON THE CONTACT AREA. OR Tin ON THE SOLDERING AREA.
3. PRODUCT SPECIFICATION
 - 3.1 CURRENT RATING :5A
 - 3.2 VOLTAGE RATING : 30V AC
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC
 - 3.4 INSULATION RESISTANCE: 100MΩ min.
 - 3.5 CONTACT RESISTANCE: 30mΩ Max.
 - 3.6 Operating Temperature: -40° ~105°

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.5 X.x ±0.35 X.xx ±0.25 ANGULAR ±2°	DESIGN	PENG. GAO	DATE	TITLE:	
	APPROVED	FE0. LONG. HE	DATE	XB-B01M-R1-A-16P	
	PART NO			REV: 01	SCALE: 1:1
	DRAWING NO			SIZE: A4	SHEET: 1/1

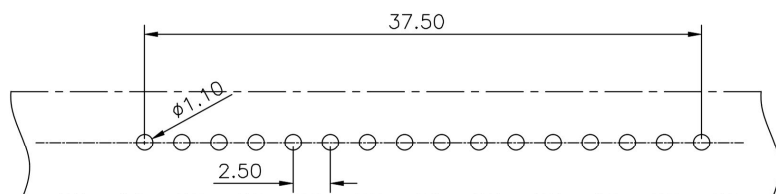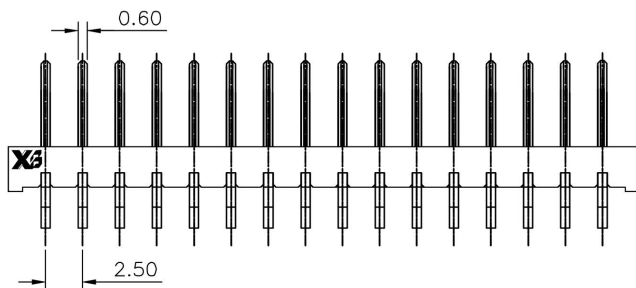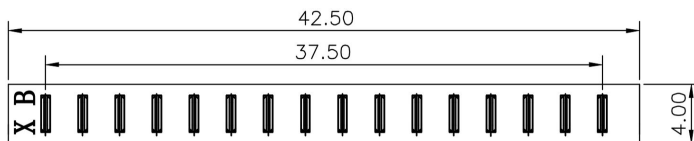

RECOMMENDED PCB LAYOUT
T=1.2MM,TOLERANCES±0.05MM

NOTE:

1. MATERIAL:

1.1 HOUSING: PA9T, UL 94V-0

1.2 TERMINAL: C2680

2. FINISH:

2.1 TERMINAL: NICKEL 50 μ"MIN UNDER PLATED
OVERALL, Au PLATED ON THE CONTACT AREA.
OR Tin ON THE SOLDERING AREA.

3. PRODUCT SPECIFICATION

3.1 CURRENT RATING :5A

3.2 VOLTAGE RATING : 30V AC

3.3 DIELECTRIC WITHSTANDING VOLTAGE:500VAC

3.4 INSULATION RESISTANCE: 100MΩ min.

3.5 CONTACT RESISTANCE: 30mΩ Max.

3.6 Operating Temperature: -40° ~105°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

UNLESS OTHERWISE
SPECIFIED, TOLERANCE:

X. ±0.5
X.x ±0.35
X.xx ±0.25
ANGULAR ±0.25

DESIGN	PENG. GAO	DATE		TITLE:
APPROVED	FEI. LONG. HE	DATE		XB-B01M-R1-A-16P-L
PART NO		REV: 01	SCALE: 1:1	UNIT: MM
DRAWING NO		SIZE: A4	SHEET: 1/1	