

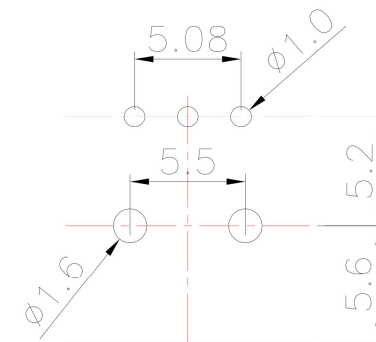
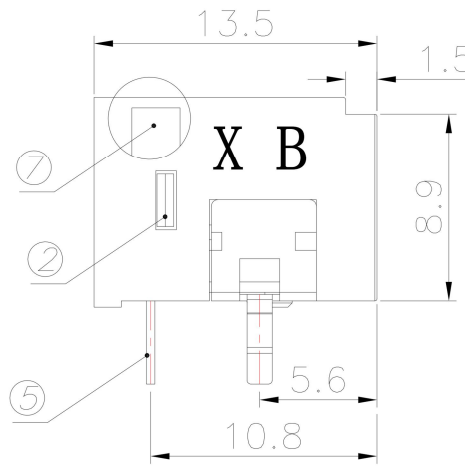
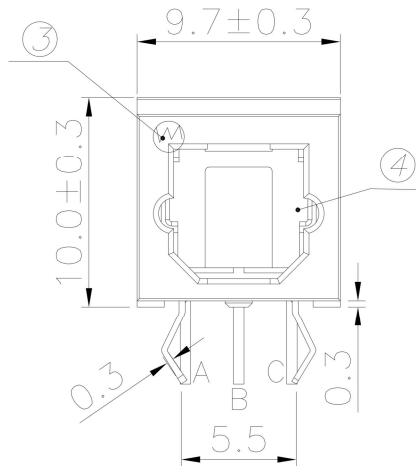


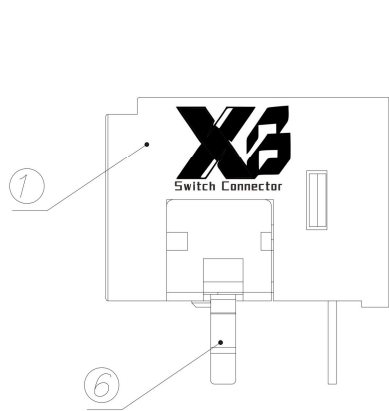

PCB LAYOUT

OJ-416E-XXx-S214

TX	1	16 Mbps
RX	2	25 Mbps



RECEIVER

OJ-416E-RX



TRANSMITTER

OJ-416E-TX

SPECIFICATIONS:

- 1.DISSIPATION CURRENT: 5.0 mA.
- 2.PPERATING VOLTAGE(Vcc): 2.7-5.5 V.
- 3.INSERTION FORCE: 4.0Max Kgs
- 4.EXTRACTION FORCE: 0.6Kgs TO 4.0 Kgs
- 5.ENDURANCE: 500 CYCLEs
- 6.OPERATING TEMPERATURE: -25 TO +85 °C.

⑦	COVER 2	PBT	BLACK COLOR	1
⑥	SHELL	SPCC	Cu+Ni+Sn	1
⑤	IC	BRASS		1
④	COVER 1	PBT	BLACK COLOR	1
③	SPRING	SUS		1
②	HOUSING	PBT	BLACK COLOR	1
①	HOUSING	PBT	BLACK COLOR	1
ITEM	DESCRTPTION	MATERIAL	PLATING&COLOR	QTY



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu 08/11/20
CHECKED BY: Jacky Chen 08/11/20
APPROVED BY: Tony Kao 08/11/20

MAT'L	TITLE	JACK
FINISH	MODLE	OPTICAL JACK
SCALE	1 : 1	DWG NO. OJ-416E-XXx-S214
SHEET NO.	1 of 1	PART NO. OJ-416E-XXx-S214
SIZE	A4	
VER	R	