
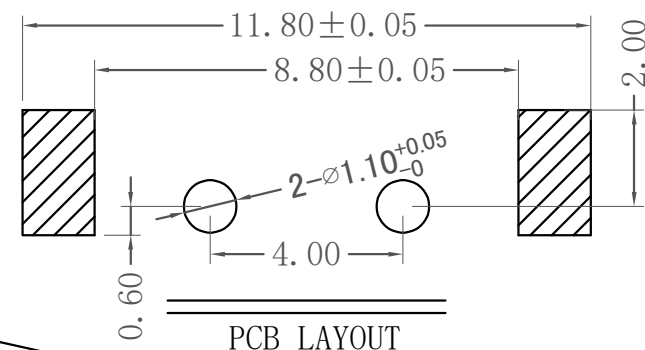
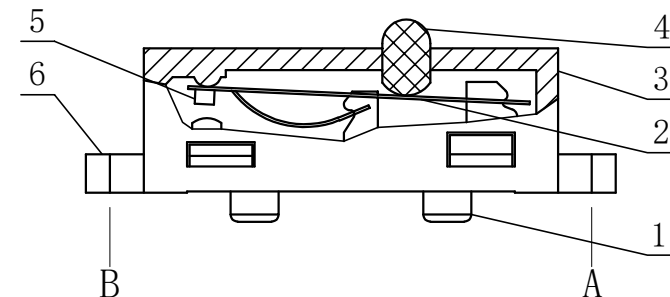


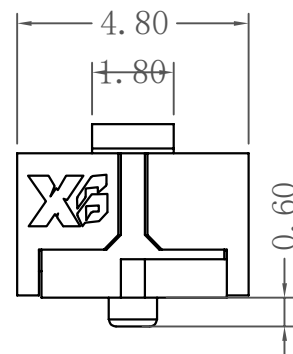


D	E	F	G	H
Rating	DC30V 0.1A	Electrical Life	5,000,000 cycles	
Contact Resistance	100mΩ Max	Mechanical Life	5,000,000 cycles	
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +70℃	
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃	
Soldering Temper.	255±5℃ 5s	Operating Force	90gf MAX	

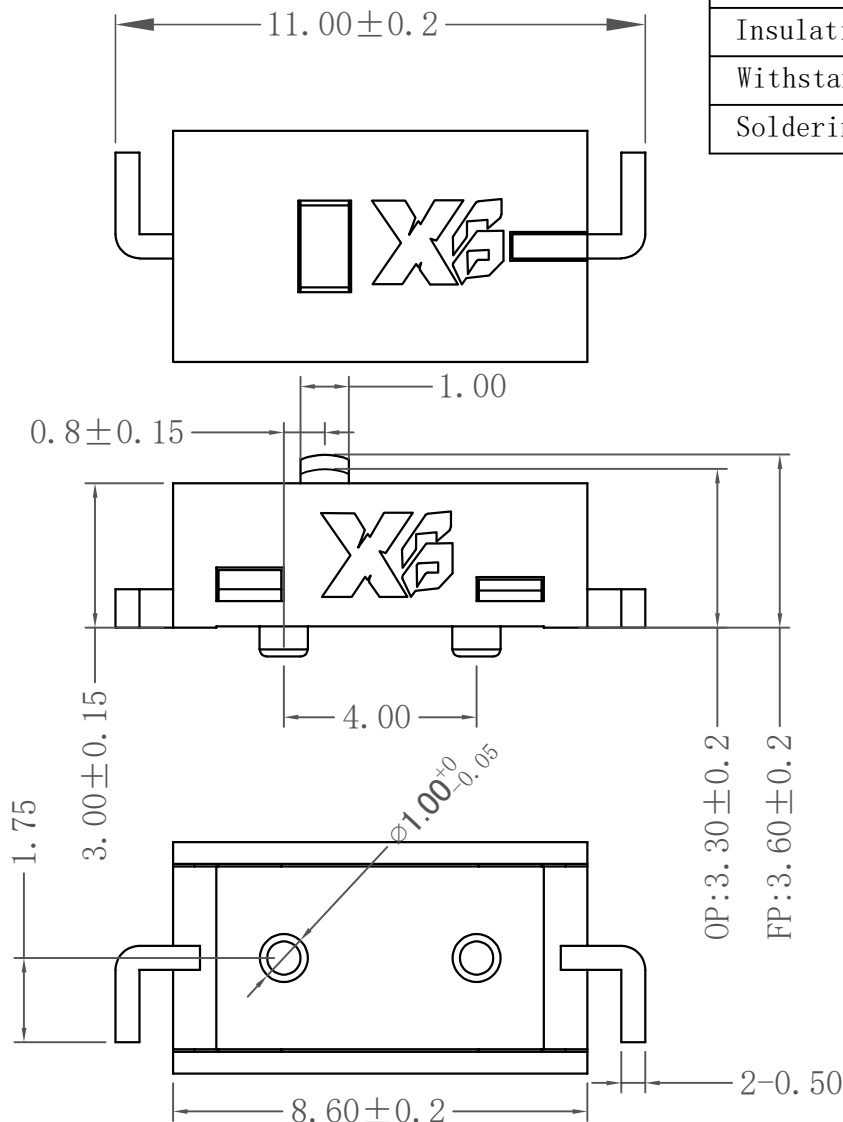

6	端子	2	C2680	镀银
5	触点	1	银合金	
4	按钮	1	高温尼龙	
3	盖片	1	高温尼龙	
2	弹片	1	C17200	
1	底座	1	高温尼龙	
序号	零件名称	数量	材质	备注

制图 DRAWING	PENG. GAO		
设计 DESIGN	PAN. HE		
审核 CHECKED	JIE. HAI. LAI		比例 SCALE
核准 APPROVE	FEI. LONG. HE		张数 SHEET
一般公差 TOLERANCE	L=20~30	±0.20	单位 UNIT
	L=10~20	±0.15	
	L=3~10	±0.10	角度 ANGLES
	L=0~3	±0.05	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN									
审核 CHECKED	J.TE. HAI. LAI		比例 SCALE	8:1	名称 TITLE	超小型微动开关(贴片式)			
核准 APPROVE	FEI. LONG. HE		张数 SHEET	1/1	料号 P/N NO.	XB-TM-036-00M-60-5			
TOLERANCE	一般公差	L=20~30 ±0.20	单位 UNIT	mm	模具编号 P/N NO.				
		L=10~20 ±0.15							
		L=3~10 ±0.10	角度 ANGLES	±2.0°	纸张 SIZE	A4	角分 P. R. O. I.		工程圖 ENG DRAW
		L=0~3 ±0.05							