
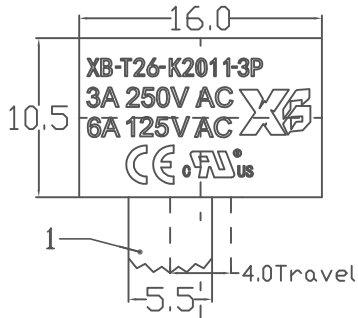


SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC; 6A 125V AC
FUNCTION	1P-2T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

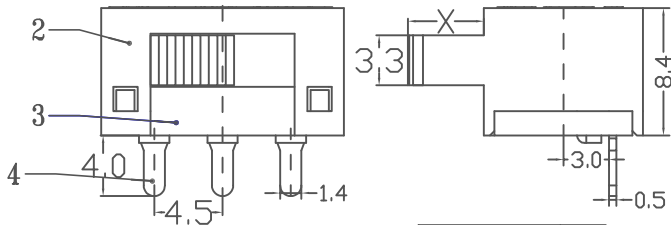

Model No.	X (mm)
XB-T26-K2011-3P-G2	2mm
XB-T26-K2011-3P-G3	3mm
XB-T26-K2011-3P-G4	4mm
XB-T26-K2011-3P-G5	5mm
XB-T26-K2011-3P-G6	6mm
XB-T26-K2011-3P-G7	7mm
XB-T26-K2011-3P-G8	8mm
XB-T26-K2011-3P-G9	9mm
XB-T26-K2011-3P-G10	10mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	3	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BLACK
1	KNOB	PA66	1	BLACK
NO	PARTS	MATERIALS	Q' TY	FINISH

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED:

Up to 5
Above 5 - 15
Above 15 - 30
Above 30 - 50
Angle

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: PENG GAO
CHECKED BY: ZENG CHEN
APPROVED BY: ZENG CHEN
DATE: 01/29/24

MAT' L	TI' TLE	SCALE	DWG NO.	PART NO.	SHEET NO.	SIZE
FINISH	MODLE	1:1	XB-T26-K2011-3P	XB-T26-K2011-3P	1 of 1	A4
						VER

ITEM NO.	DESCRIPTION	QTY	UNIT
1	XB-T26-K2011-3P		
2	XB-T26-K2011-3P		
3	XB-T26-K2011-3P		
4	XB-T26-K2011-3P		
5	XB-T26-K2011-3P		
6	XB-T26-K2011-3P		
7	XB-T26-K2011-3P		