
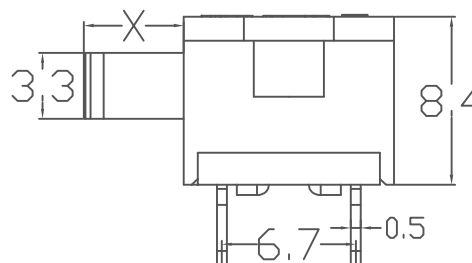
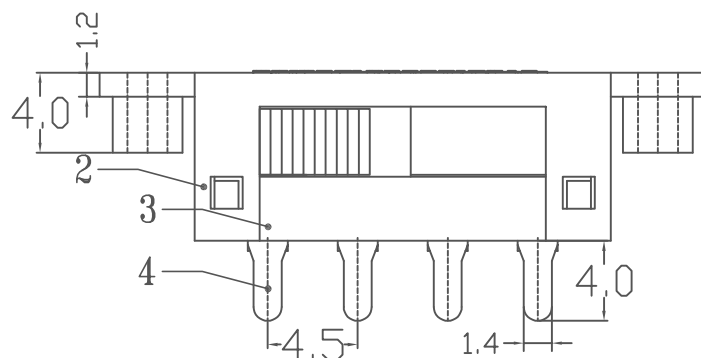


SCHEMATIC (NON-SHORTING)

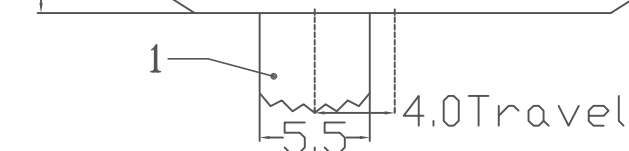

Model No	X (mm)
XB-T26-K2322-8P-E-G2	2mm
XB-T26-K2322-8P-E-G3	3mm
XB-T26-K2322-8P-E-G4	4mm
XB-T26-K2322-8P-E-G5	5mm
XB-T26-K2322-8P-E-G6	6mm
XB-T26-K2322-8P-E-G7	7mm
XB-T26-K2322-8P-E-G8	8mm
XB-T26-K2322-8P-E-G9	9mm
XB-T26-K2322-8P-E-G10	10mm

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	2P-3T
Contact Resistance	50mΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	8	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Drawing选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPIC		
1	更新封面		
ITEM NO.	DESCRIPTION	DRAWN	DATE



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5		± 0.2
Above 5	-15	± 0.3
Above 15	-30	± 0.4
Above 30	-50	± 0.5
Angle		$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

	DRAWN BY:

DATE _____

MAT' L

TI' TLE

CHECKED BY:

DATE _____

FINISH

MODE F

ZENG CHEN

01/29/

SCALE

DWG NO

GRAND TOTAL

01 / 00 /

SHEET NO.

PART N

YR-T26-K2322-8P-F

YR-T26-K2322-8P-F

	SIZE
--	------

	A4
--	----

VER