


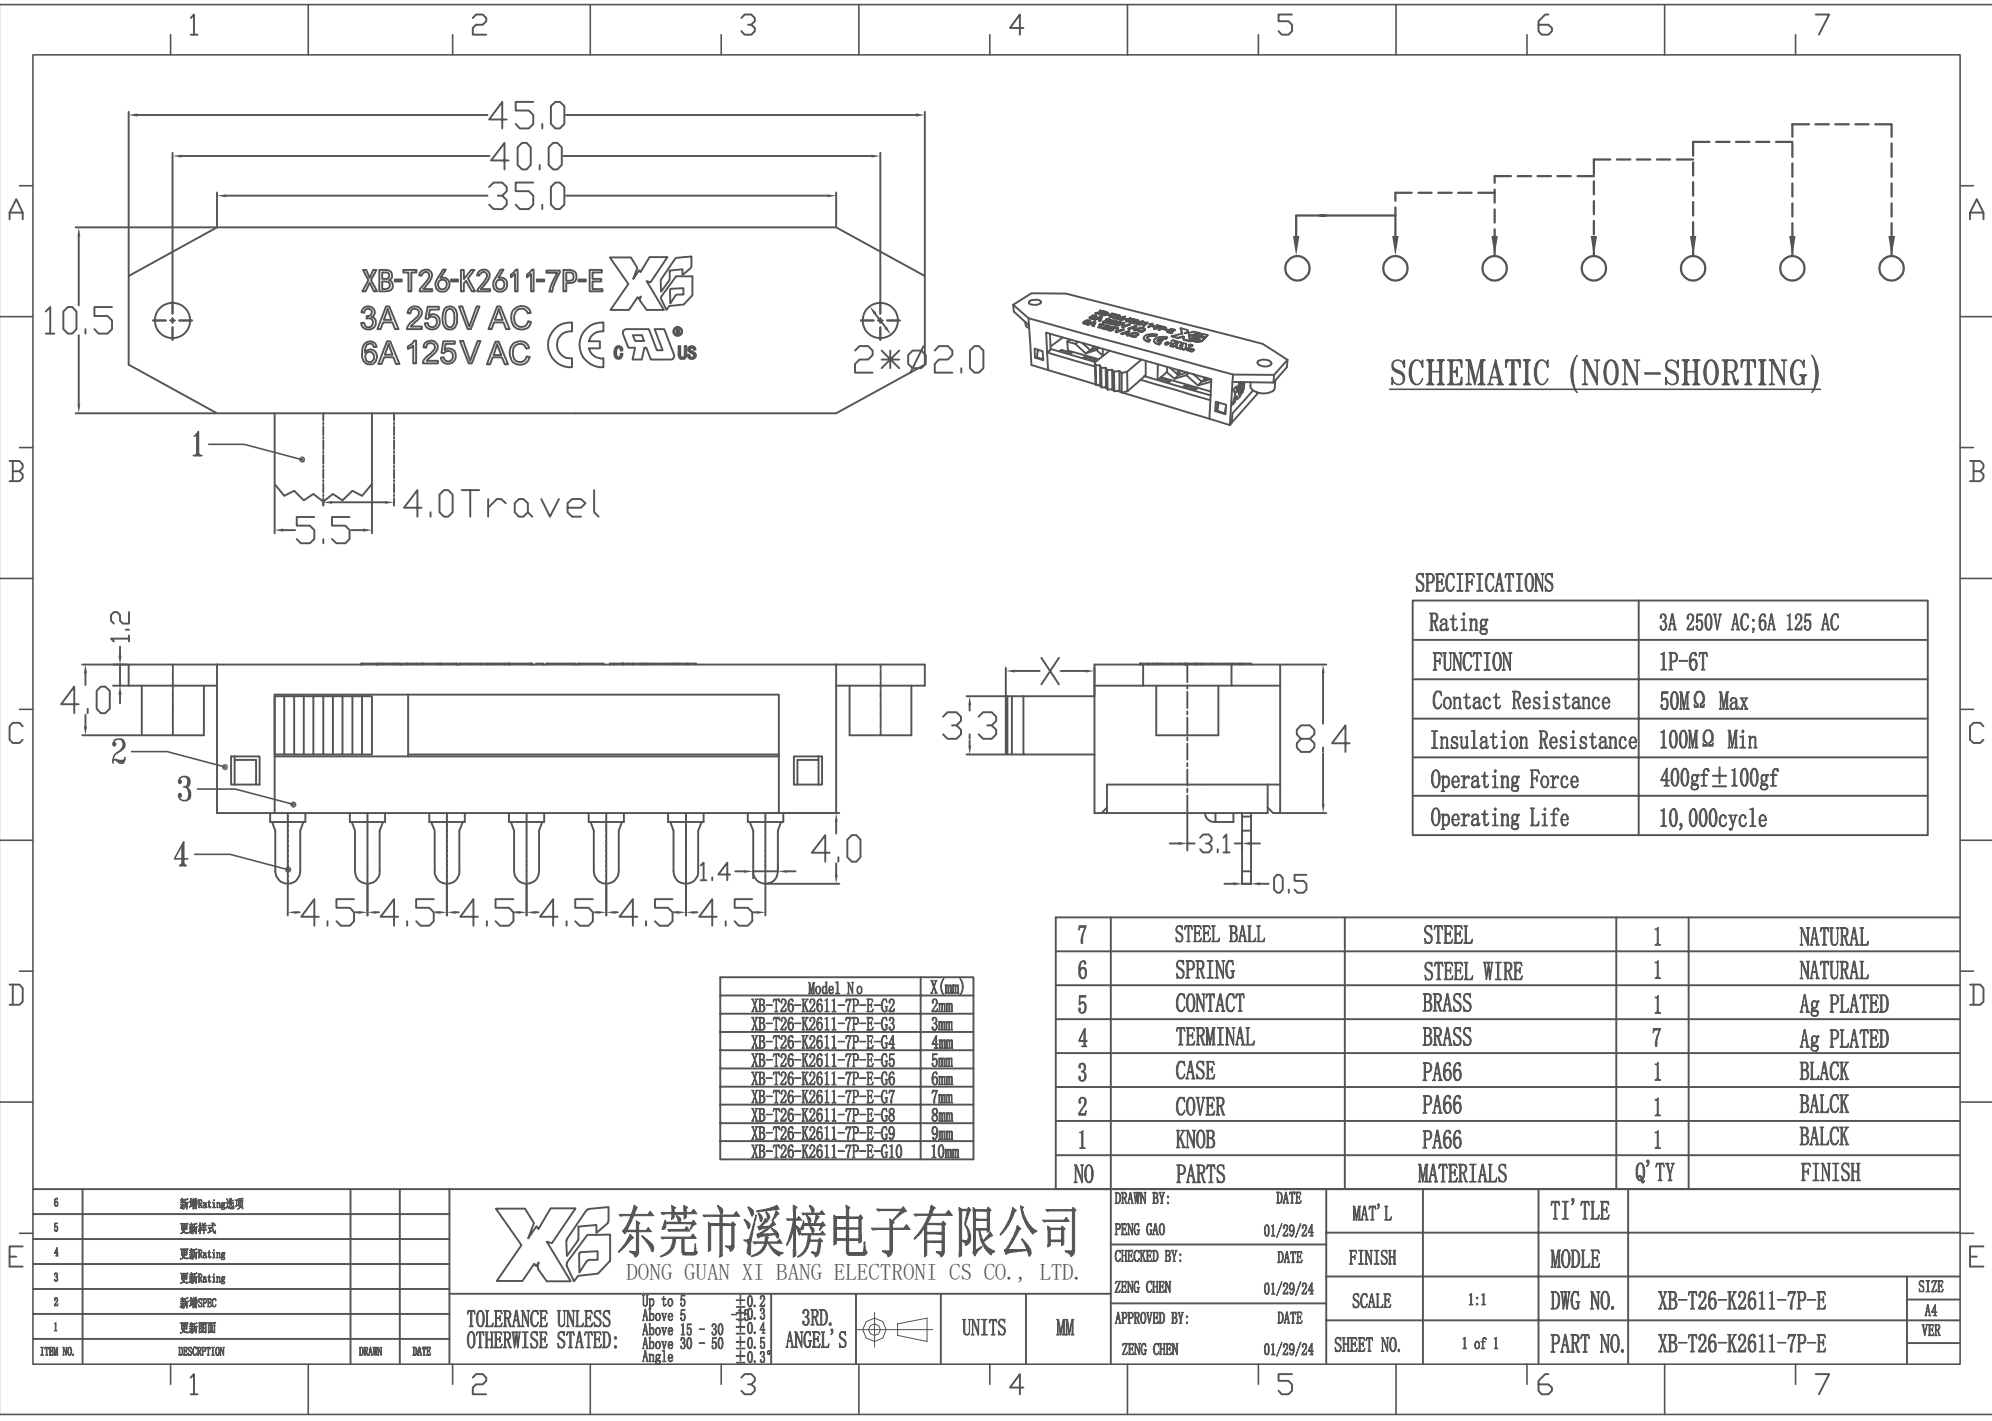

XB-T26-K2611-7P-E
3A 250V AC
6A 125V AC

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Table with 2 columns: Specification (Rating, FUNCTION, Contact Resistance, Insulation Resistance, Operating Force, Operating Life) and Value (3A 250V AC;6A 125 AC, 1P-6T, 50MΩ Max, 100MΩ Min, 400gf±100gf, 10,000cycle).

Table with 2 columns: Model No (XB-T26-K2611-7P-E-G2 to G10) and X (mm) (2mm to 10mm).

Table with 4 columns: Item No (7 to NO), PARTS (STEEL BALL, SPRING, CONTACT, TERMINAL, CASE, COVER, KNOB), MATERIALS (STEEL, STEEL WIRE, BRASS, BRASS, PA66, PA66, PA66), Q' TY (1, 1, 1, 7, 1, 1, 1), and FINISH (NATURAL, NATURAL, Ag PLATED, Ag PLATED, BLACK, BALCK, BALCK).

Table with 4 columns: ITEM NO (6 to 1), DESCRIPTION (新增Rating选项, 更新样式, 更新Rating, 更新Rating, 新增SPBC, 更新图案), DRAWN, and DATE.

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ±0.3, Above 15 - 30 ±0.4, Above 30 - 50 ±0.5, Angle ±0.3

Table with 4 columns: DRAWN BY (PENG GAO), CHECKED BY (ZENG CHEN), APPROVED BY (ZENG CHEN), DATE (01/29/24), MAT'L, FINISH, SCALE (1:1), SHEET NO. (1 of 1), TI'TLE, MODLE, DWG NO. (XB-T26-K2611-7P-E), PART NO. (XB-T26-K2611-7P-E), SIZE (A4), and VER.