




XB-T26-K2622-14P-E-SMD
3A 250V AC
6A 125V AC

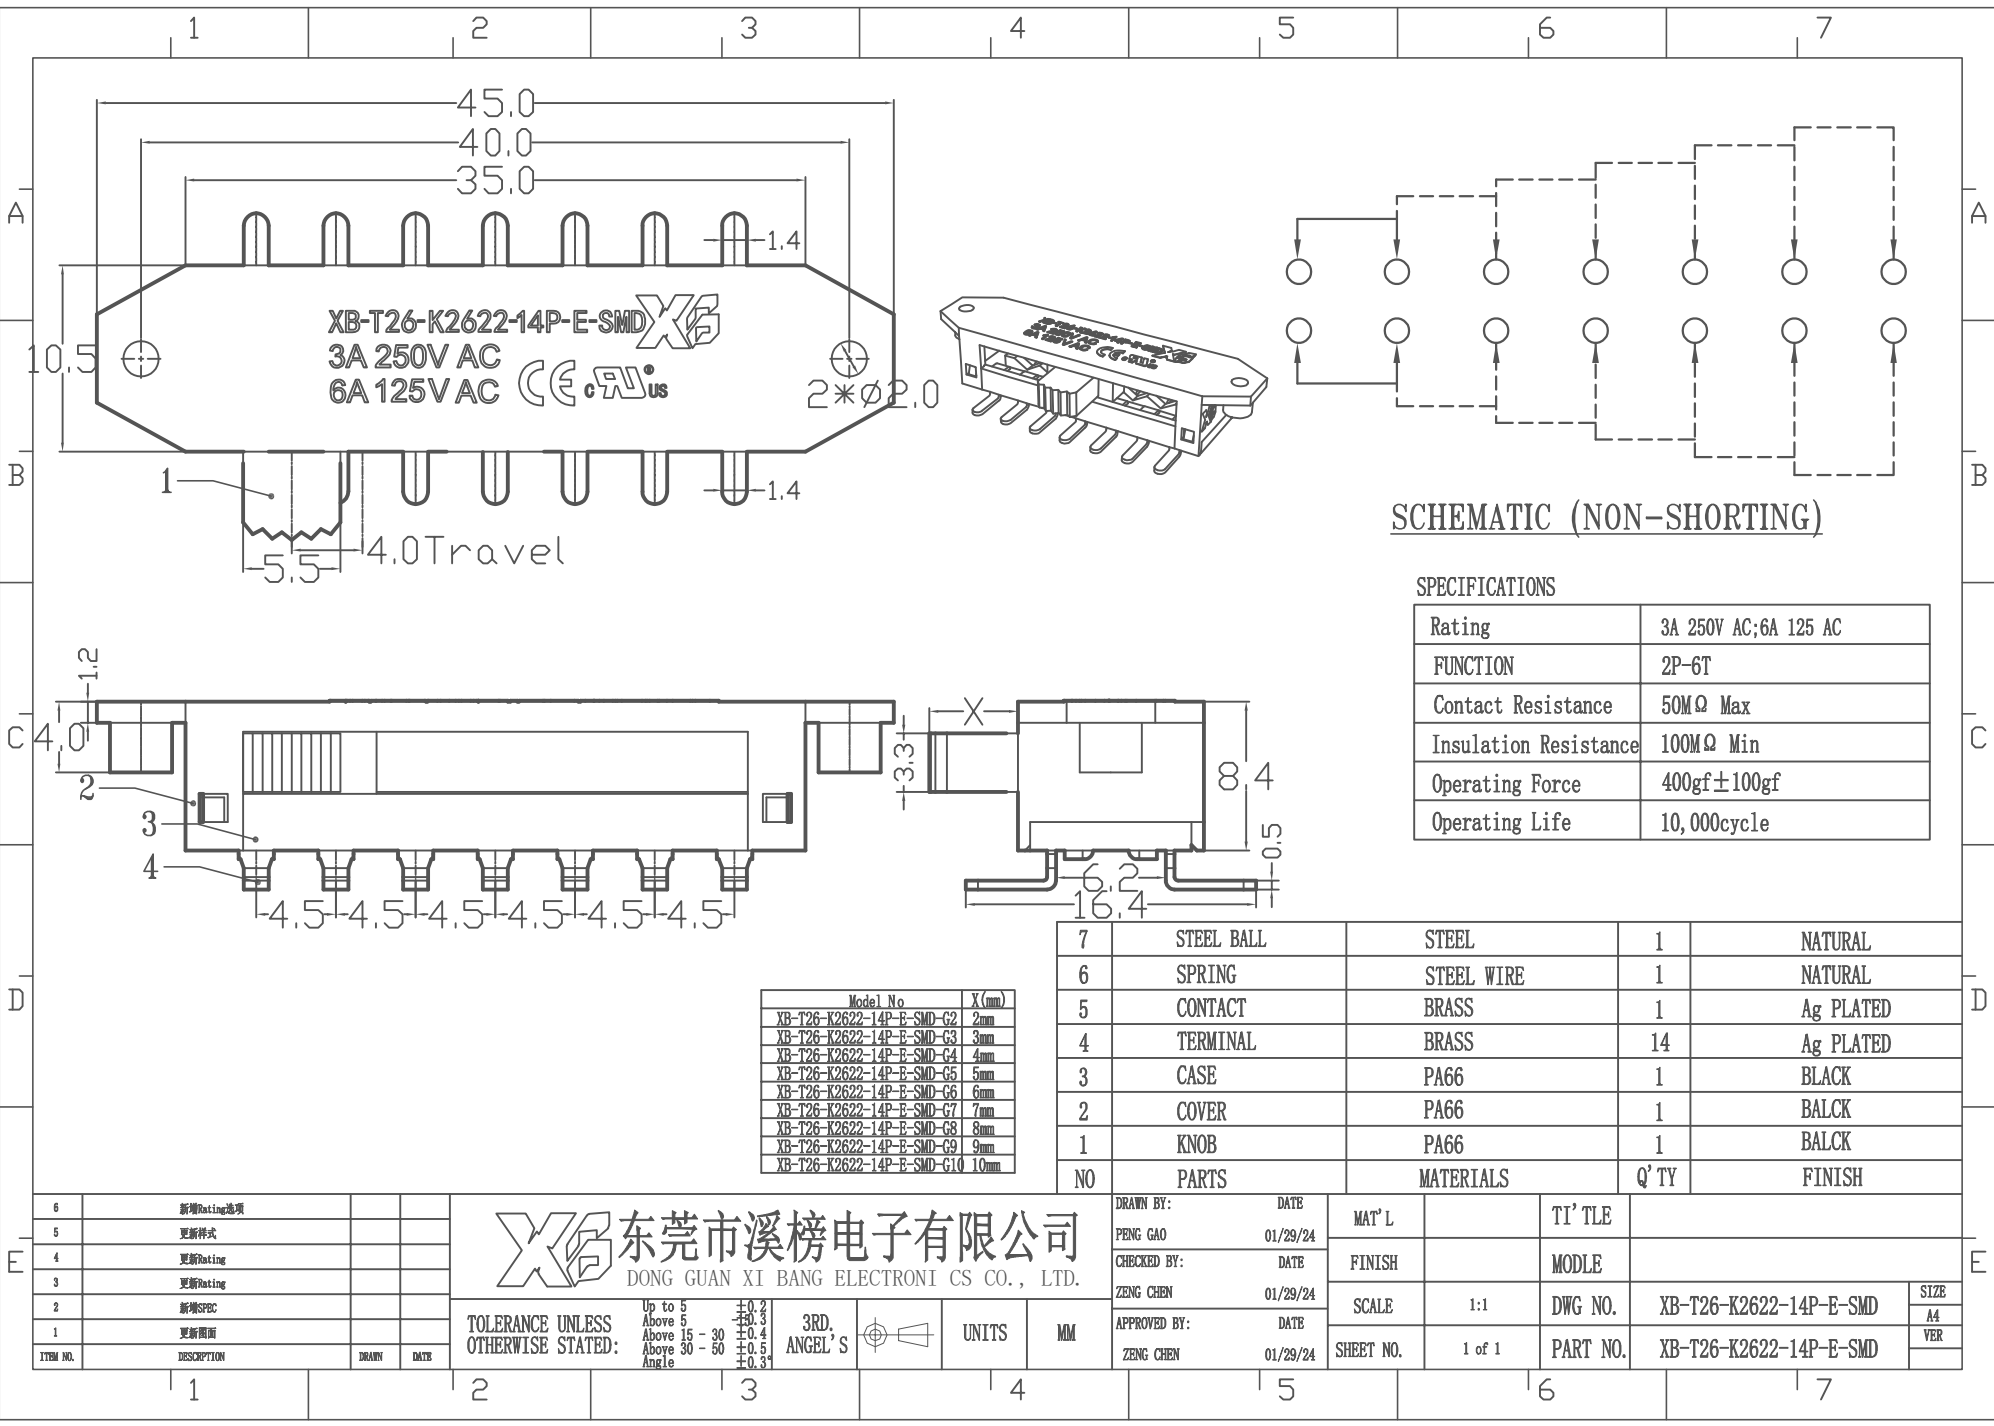

SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

Rating	3A 250V AC;6A 125 AC
FUNCTION	2P-6T
Contact Resistance	50MΩ Max
Insulation Resistance	100MΩ Min
Operating Force	400gf±100gf
Operating Life	10,000cycle

Model No	X(mm)
XB-T26-K2622-14P-E-SMD-G2	2mm
XB-T26-K2622-14P-E-SMD-G3	3mm
XB-T26-K2622-14P-E-SMD-G4	4mm
XB-T26-K2622-14P-E-SMD-G5	5mm
XB-T26-K2622-14P-E-SMD-G6	6mm
XB-T26-K2622-14P-E-SMD-G7	7mm
XB-T26-K2622-14P-E-SMD-G8	8mm
XB-T26-K2622-14P-E-SMD-G9	9mm
XB-T26-K2622-14P-E-SMD-G10	10mm

7	STEEL BALL	STEEL	1	NATURAL
6	SPRING	STEEL WIRE	1	NATURAL
5	CONTACT	BRASS	1	Ag PLATED
4	TERMINAL	BRASS	14	Ag PLATED
3	CASE	PA66	1	BLACK
2	COVER	PA66	1	BALCK
1	KNOB	PA66	1	BALCK
NO	PARTS	MATERIALS	Q' TY	FINISH

6	新增Rating选项		
5	更新样式		
4	更新Rating		
3	更新Rating		
2	新增SPEC		
1	更新画面		
ITEM NO.	DESCRIPTION	DRAWN	DATE

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ±0.3
Above 15 - 30 ±0.4
Above 30 - 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE
PENG GAO	01/29/24
CHECKED BY:	DATE
ZENG CHEN	01/29/24
APPROVED BY:	DATE
ZENG CHEN	01/29/24

MAT'L		TI'TLE		
FINISH		MODLE		
SCALE	1:1	DWG NO.	XB-T26-K2622-14P-E-SMD	SIZE
SHEET NO.	1 of 1	PART NO.	XB-T26-K2622-14P-E-SMD	A4
				VER