ROHS

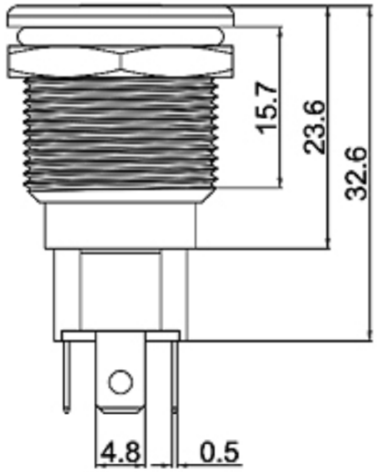

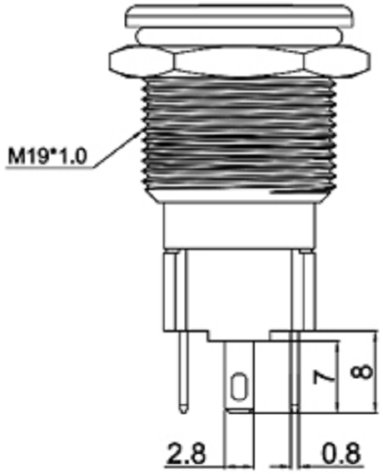

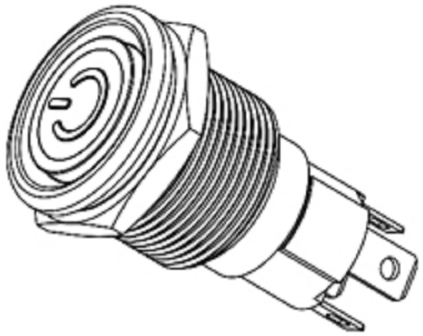

SPECIFICATIONS
Rating: 10A 250VACmax;
Degree of protction: IP67;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:1500VAC For 1 minute ;
Total Travel: 3± 0.5mm ;
Operating Force:600± 200gf ;
Mechanical Life:30,000 cycles ;
Load Life:10,000 cycles ;
Operating Temperation:-20° C~70° C ;
Function:LOCK



CUT-OUT



Panel Thinkness: 10mm MAX.



MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

LED Specifications

LED 类型	双向LED灯珠（交直流通用）			W6	白色	5.0	6.0	9.0	15
寿 命	40000小时（参考值）			U6	蓝色	5.0	6.0	9.0	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	G6	纯绿色	5.0	6.0	9.0	15
	AC/DC36V	AC/DC48V	AC/DC220V	Y6	黄色	5.0	6.0	9.0	15
额定电流	约15mA		约3mA	R6	红色	5.0	6.0	9.0	15
降压方式	采用3V灯，需内置电阻			W3	白色	2.8	3.0	3.4	15
				U3	蓝色	2.8	3.0	3.4	15
				G3	纯绿色	2.8	3.0	3.4	15
				Y2	黄色	1.8	2.0	2.4	15
				R2	红色	1.8	2.0	2.4	15
				灯发光颜色 X Emitted color X		最小	一般	最大	额定电流 (mA)
						顺向电压(V)			

Switch Connector

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : METAL PUHS BUTTON SWITCH
MODEL : XB-PAM19-11Z-C-PU12-S0

UNIT : MM	DWN.	ZENQ. CHEN	DATE		
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE		
VERSION 01	APPD.	FEI. LONG. HE	DATE		

TOLERANCE	ANGLE
<=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	±2°

NO.	PART NAME	MATERIAL	QTY.	FINISHING
7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK