

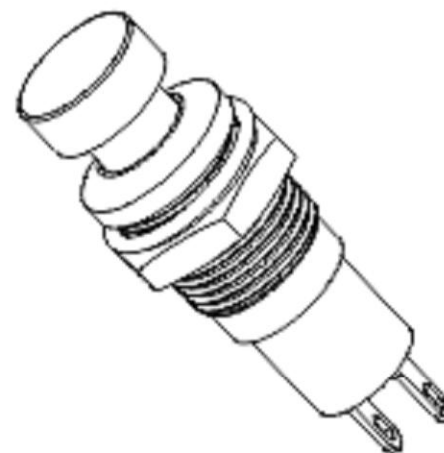
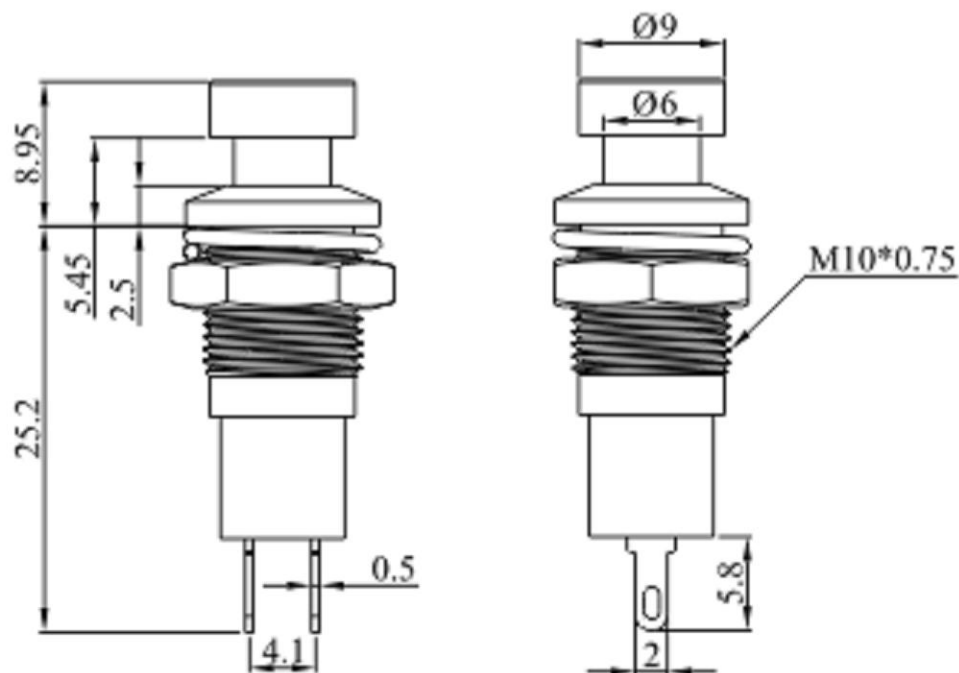


ROHS




Rating: 1A 36VDC
 1A 125VAC / 0.5A 250VDC
 Contact Resistance: 50mΩ Max.
 Insulation Resistance: DC 500V 100MΩ Min.
 Dielectric Strength: AC 1000V 1 minute
 Total travel: 2.0±0.5mm
 Operating Force: 400±100gf
 Electrical Life: 10,000 cycles
 Mechanical Life: 5,000 cycles
 Operating Temperature: -20° C ~ 70° C
 Function: OFF - ON




Panel Thickness: 4mm MAX.

MATERIAL:
 Actuator: SUS ;
 Top Base: SUS;
 Bottom Base: PA66+GF ;
 Terminal: Brass, Silver plated ;
 Nut: Brass, Ni plated .

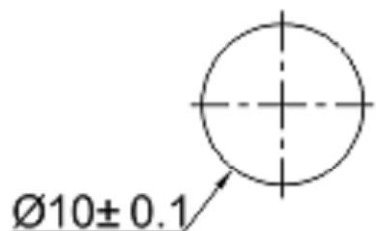

CUT-OUT

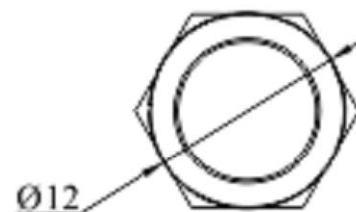

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
		TITLE : METAL PUHS BUTTON SWITCH											
		MODEL : XB-PBM10-11Z-T-NNN-S0											
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE	
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE	
VERSION		01	APPD.	FEI. LONG. HE	DATE				5	BOARD	PHENOLIC RESIN	1	NATURE
									4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
									3	FRAME	IRON STRIP	1	Ni PLATED
								2	TERMINAL	BRASS STRIP	8	Ag PLATED	
								1	KNOB	POM	1	BLACK	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	