

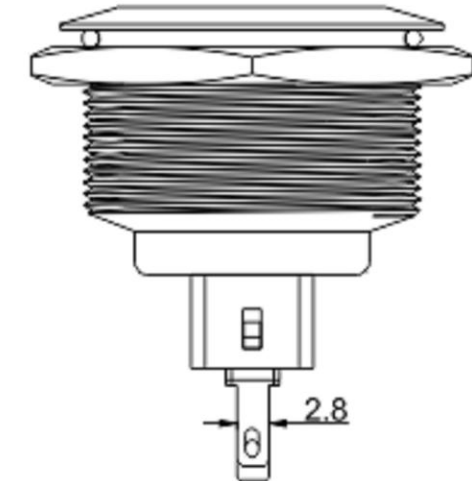
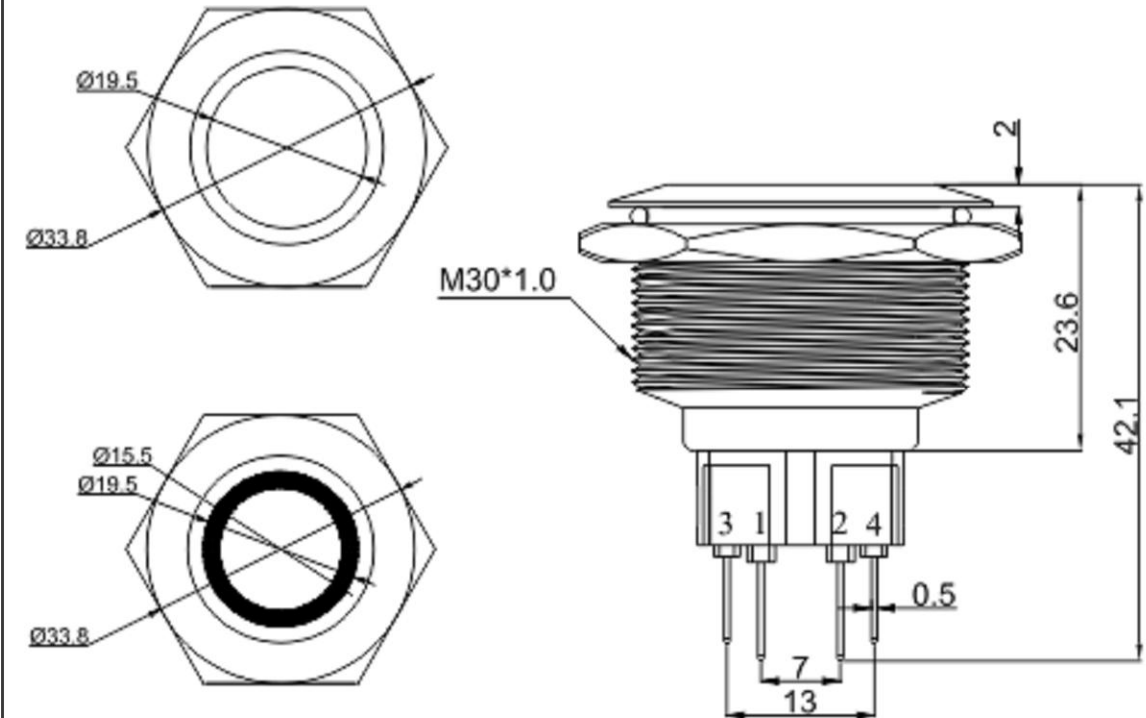


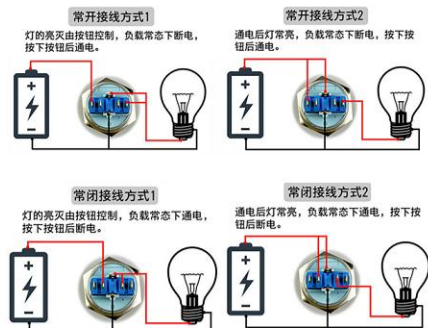

Switch Specifications
Rating: 5A 250VAC ;
2A 36VDC ;
Degree of protection: IP67;
Contact Resistance: 50mΩ Max. ;
Dielectric Strength: 1000VAC For 1 minute ;
Total Travel: 2.8±0.5mm ;
Operating Force: 600±200gf ;
Mechanical Life: 200,000 cycles ;
Load Life: 50,000 cycles ;
Operating Temperature: -20° C~85° C ;
Function: OFF-(ON)

Panel Thickness: 10mm MAX.



MATERIAL:
Actuator: SUS ;
Top Base: SUS;
Bottom Base: PA66+GF ;
Terminal: Brass, Silver plated ;
Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD													
		TITLE : METAL PUHS BUTTON SWITCH								TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°		7	SPRING
MODEL : XB-PBM30-12M-H-NNN-S0								6	STEEL BALL	STEEL	1	NATURE			
UNIT : MM		DWN.	ZENQ. CHEN	DATE					5	BOARD	PHENOLIC RESIN	1	NATURE		
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE					4	CONTACT CLIP	PBS STRIP	2	Ag PLATED		
VBRSION		01	APPD.	FEI. LONG. HE	DATE					3	FRAME	IRON STRIP	1	Ni PLATED	
										2	TERMINAL	BRASS STRIP	8	Ag PLATED	
										1	KNOB	POM	1	BLACK	
										NO.	PART NAME	MATERIAL	QTY.	FINISHING	