
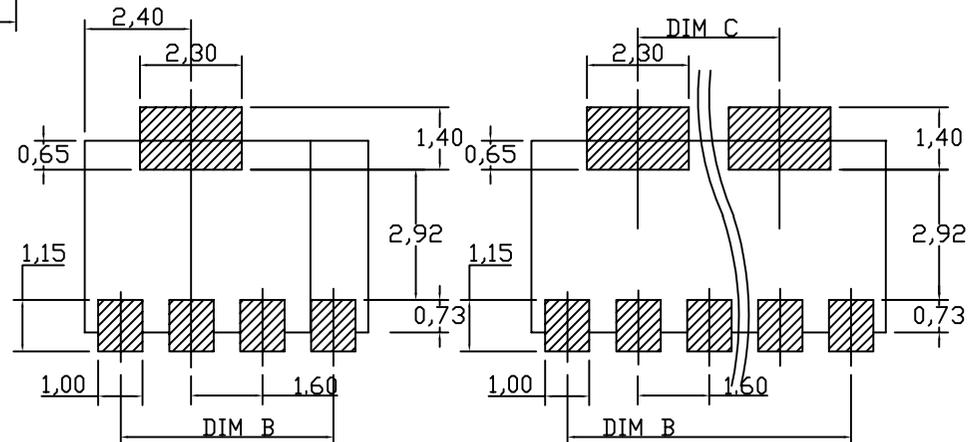


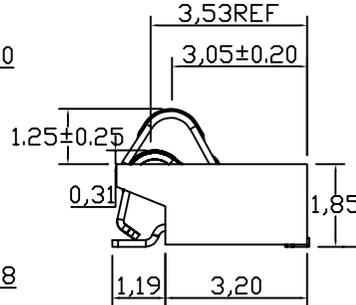


性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ MAX
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 触点镀金3U"
- 使用寿命: 3000次以上



3&4PIN LAYOUT

5-10PIN LAYOUT

RECOMMENDED PCB LAYOUT

TOL:(±0.05)

XB-BC-16-10P180-R125	16.00	14.40	11.20
XB-BC-16-9P180-R125	14.40	12.80	9.60
XB-BC-16-8P180-R125	12.80	11.20	8.00
XB-BC-16-7P180-R125	11.20	9.60	6.40
XB-BC-16-6P180-R125	9.60	8.00	4.80
XB-BC-16-5P180-R125	8.00	6.40	3.20
XB-BC-16-4P180-R125	6.40	4.80	0
XB-BC-16-3P180-R125	4.80	3.20	0
BE FILED	DIMA	DIMB	DIMC

版本REV.	更新标记	REVISION	NOTE	日期DATE	未注公差	TOOLERANCE
					X.	±0.35
					X.X	±0.25
					X.XX	±0.15
					X.XXX	±0.05

绘制DRAWN		品名ARTICLE:	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
设计DES'D	高鹏	XB Battery Spring Connector 电池弹片连接器		
审核CHK'D	庞东	视图方法	PROJECTION	图号MODEL:
批准APPV'D	贺龙飞	XB-BC-16系列1.8H-R1.25		A4
		比例SCALE:	3:1	单位UNIT: mm
		页码SHEET: 共1页 第1页		