


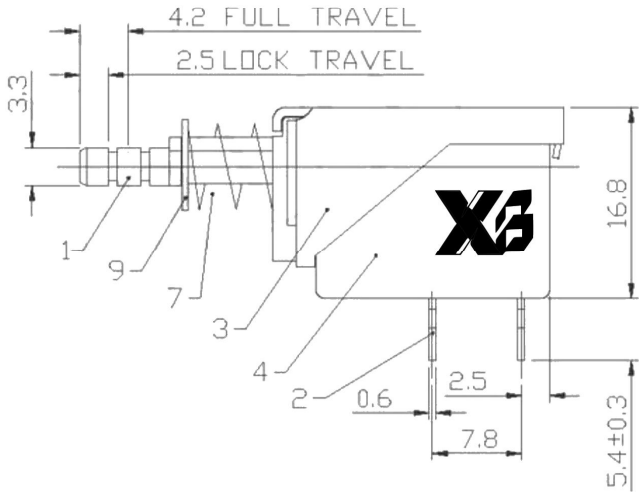


ROHS

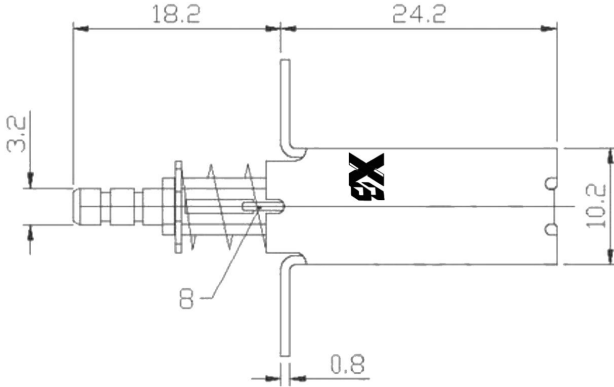

SCHEMATIC

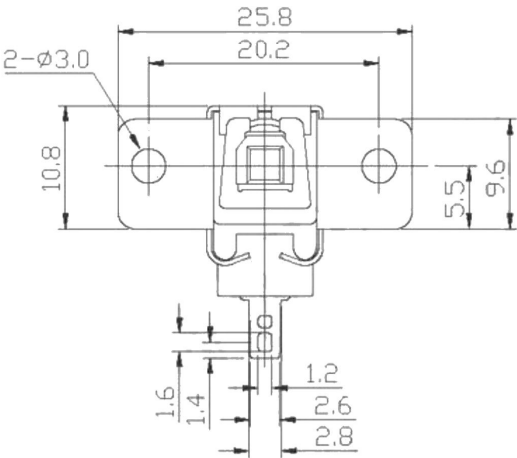

ITEM	PERFORMANCE
Title	PUSHSWICH
Model	PS11E02
Rating	2A 250V AC / 8A 250V AC
Function	1P1T
Timing	Non-Shorting
ContactResistance(mohms)	30mΩ max
Insulation Resistanc(Mohms)	100mΩ min at 500V DC
Dielectric Strength(V)	AC 500V for 1 min
LifeTest	10000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : PLASTIC PUSH SWITCH

MODEL : PS11E02 (W009)



TOLERANCE
<= 5mm ±0.1
> 5mm ±0.2
ANGLE TOL
±2°

UNIT : MM	DWN.	DATE
SCALE : 3 : 2	CHK'D	DATE
VERSION 01	APPD.	DATE

NO.	PART NAME	MATERIAL	QTY	FINISHING
10	CONTACT POINT	PBS STRIP	2	Ag PLATED
9	LOCK PLATE	IRON STRIP	1	Ni PLATED
8	CAM STICK	STEEL WIRE	1	NATURE
7	SPRING	STEEL WIRE	1	Zn PLATED
6	CONTACT	PBS STRIP	1	NATURE
5	CONTACT	BRASS STRIP	1	Ag PLATED
4	CASE	PC	1	CKEAR
3	FRAME	IRON STRIP	1	Zn PLATED
2	TERMINAL	BRASS STRIP	2	Ag PLATED
1	KNOB	POM	1	BALCK