

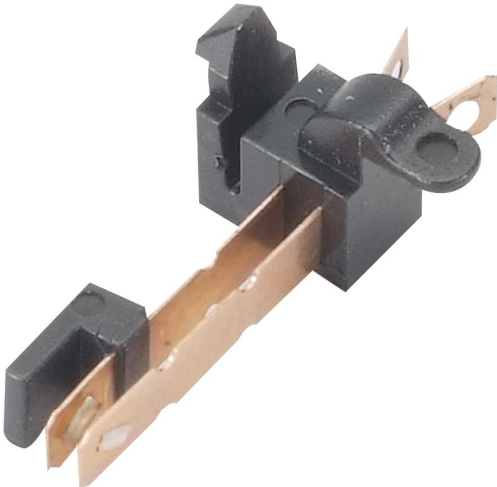
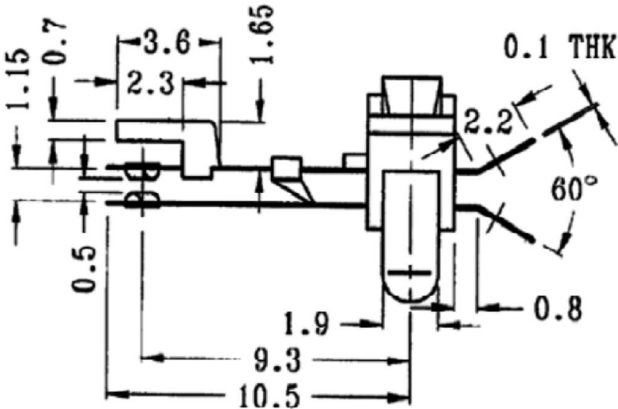
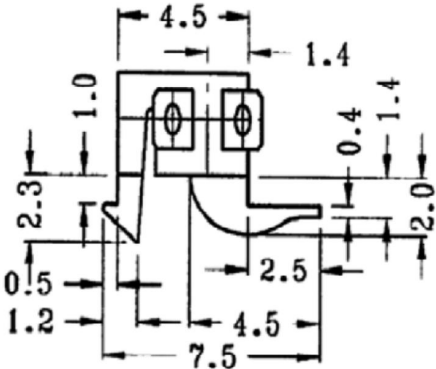


ROHS

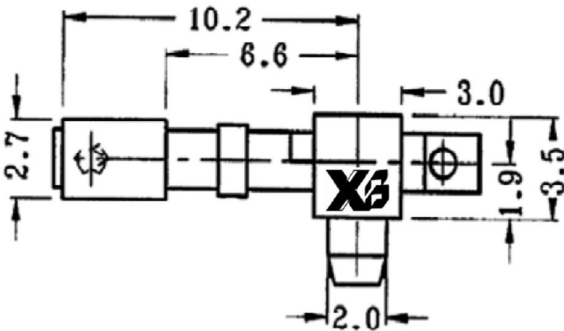

SCHEMATIC



CONTACT PLATING

G = GOLD

N = NICKEL

S = SILVER

X = NIL

Product material

- 1. Blade switch
- 2. Base: POM/PA66
- 3. Terminal: Phosphorus copper
- 4. Contact point: Purple copper
- 5. Electroplating: Silver/Gold Plating
- 6. Temperature range for use: -10 °C ± 60 °C
- 7. Current and voltage: 0.5A 12V DC
- 8. Operating force: 30GF ± 10GF
- 9. Voltage withstand: 500V 0.5mA/min
- 10. Insulation resistance: 100M Ω
- 11. Contact resistance: 30M Ω
- 12. Lifetime: 50000 times



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LEAF SWITCH

MODBL : XB-LF-002-A



TOLERANCE
<= 5mm ± 0.1
> 5mm ± 0.2

ANGLE TOL
± 2

5	CONTACT	COPPER	1	Ag PLATED
4	SPRING	BRASS STRIP	2	Ag PLATED
3	SPRING	PBS	2	NATURE
2	COVER	POM	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	DATE	
SCALE : 3 : 1	CHK'D	DATE	
VERSION	01	APPD.	DATE