

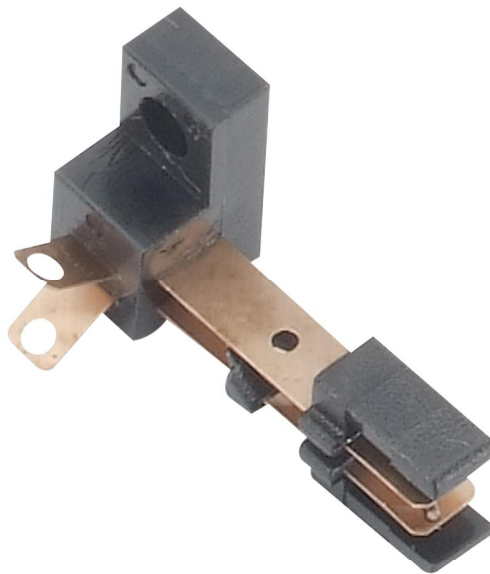
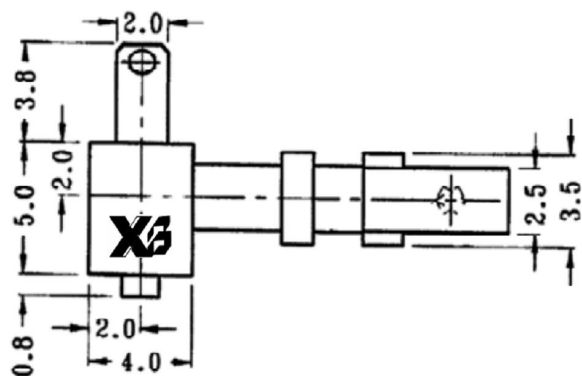



ROHS

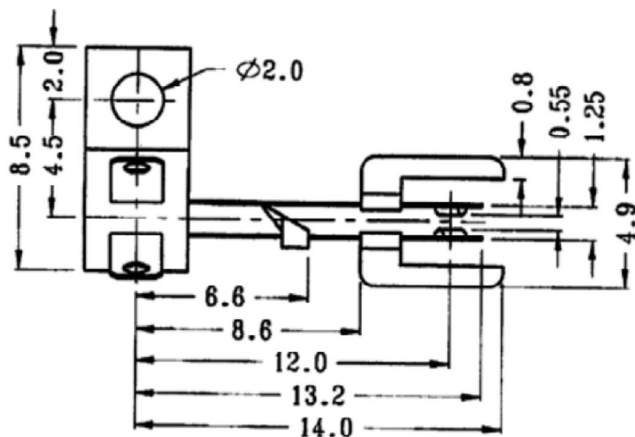

SCHEMATIC



CONTACT PLATING

G = GOLD

N = NICKEL

S = SILVER

X = NIL

Product material

1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use: $-10^{\circ}\text{C} \pm 60^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: $30\text{GF} \pm 10\text{GF}$
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: $100\text{M} \Omega$
11. Contact resistance: $30\text{M} \Omega$
12. Lifetime: 50000 times



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LEAF SWITCH

MODBL : XB-LF-004-A



TOLERANCE
 $\leq 5\text{mm} \pm 0.1$
 $> 5\text{mm} \pm 0.2$

ANGLE TOL
 ± 2

UNIT : MM
SCALE : 3 : 1
VERSION 01

DWN.
CHK'D
APPD.

DATE
DATE
DATE

5	CONTACT	COPPER	1	Ag PLATED
4	SPRING	BRASS STRIP	2	Ag PLATED
3	SPRING	PBS	2	NATURE
2	COVER	POM	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING