



SCHEMATIC

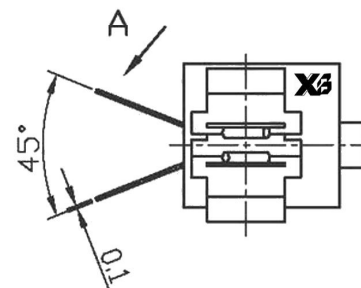

VIEW A

1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: 30GF $\pm$ 10GF
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: 100M Ω
11. Contact resistance: 30M Ω
12. Lifetime: 50000 times

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD										
		TITLE : LEAF SWITCH										
		MODEL : LF-014 (W009)										
UNIT : MM		DWN.		DATE		TOLERANCE $\leq 1.5\text{mm} \pm 0.1$ $> 1.5\text{mm} \pm 0.2$ $> 10.0\text{mm} \pm 0.3$	ANGLE TOL $\pm 2^\circ$	3	CONTACT POINT	PBS	2	Ag PLATED
SCALE : 4 : 1		CHK'D		DATE				2	SPRING TERMINAL	PBS STRIP	2	NATURE
VERSION	01	APPD.		DATE				1	HOUSING	POM	1	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING