
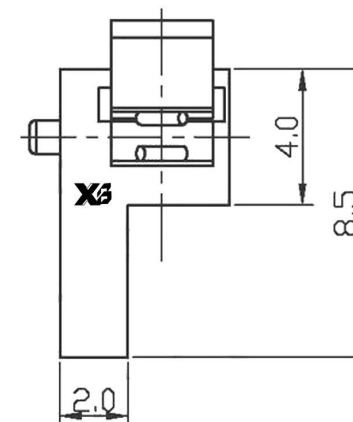


SCHEMATIC



1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: $30\text{GF} \pm 10\text{GF}$
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: $100\text{M } \Omega$
11. Contact resistance: $30\text{M } \Omega$
12. Lifetime: 50000 times

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD										
		TITLE : LBAP SWITCH										
		MODEL : LF-019 (W01053)										
UNIT : MM		DWN.		DATE		TOLERANCE $\leq 1.5\text{mm} \pm 0.1$ $> 1.5\text{mm} \pm 0.2$ $>= 10\text{mm} \pm 0.3$	ANGLE TOL $\pm 2^\circ$	3	SPRING TERMINAL	PBS STRIP	2	Ag PLATED
SCALE : 4 : 1		CHK'D		DATE				2	CONTACT POINT	PBS	2	Ag PLATED
VERSION 01		APPD.		DATE				1	CASE	POM	3	BLACK
								NO.	PART NAME	MATERIAL	QTY.	FINISHING