




ROHS

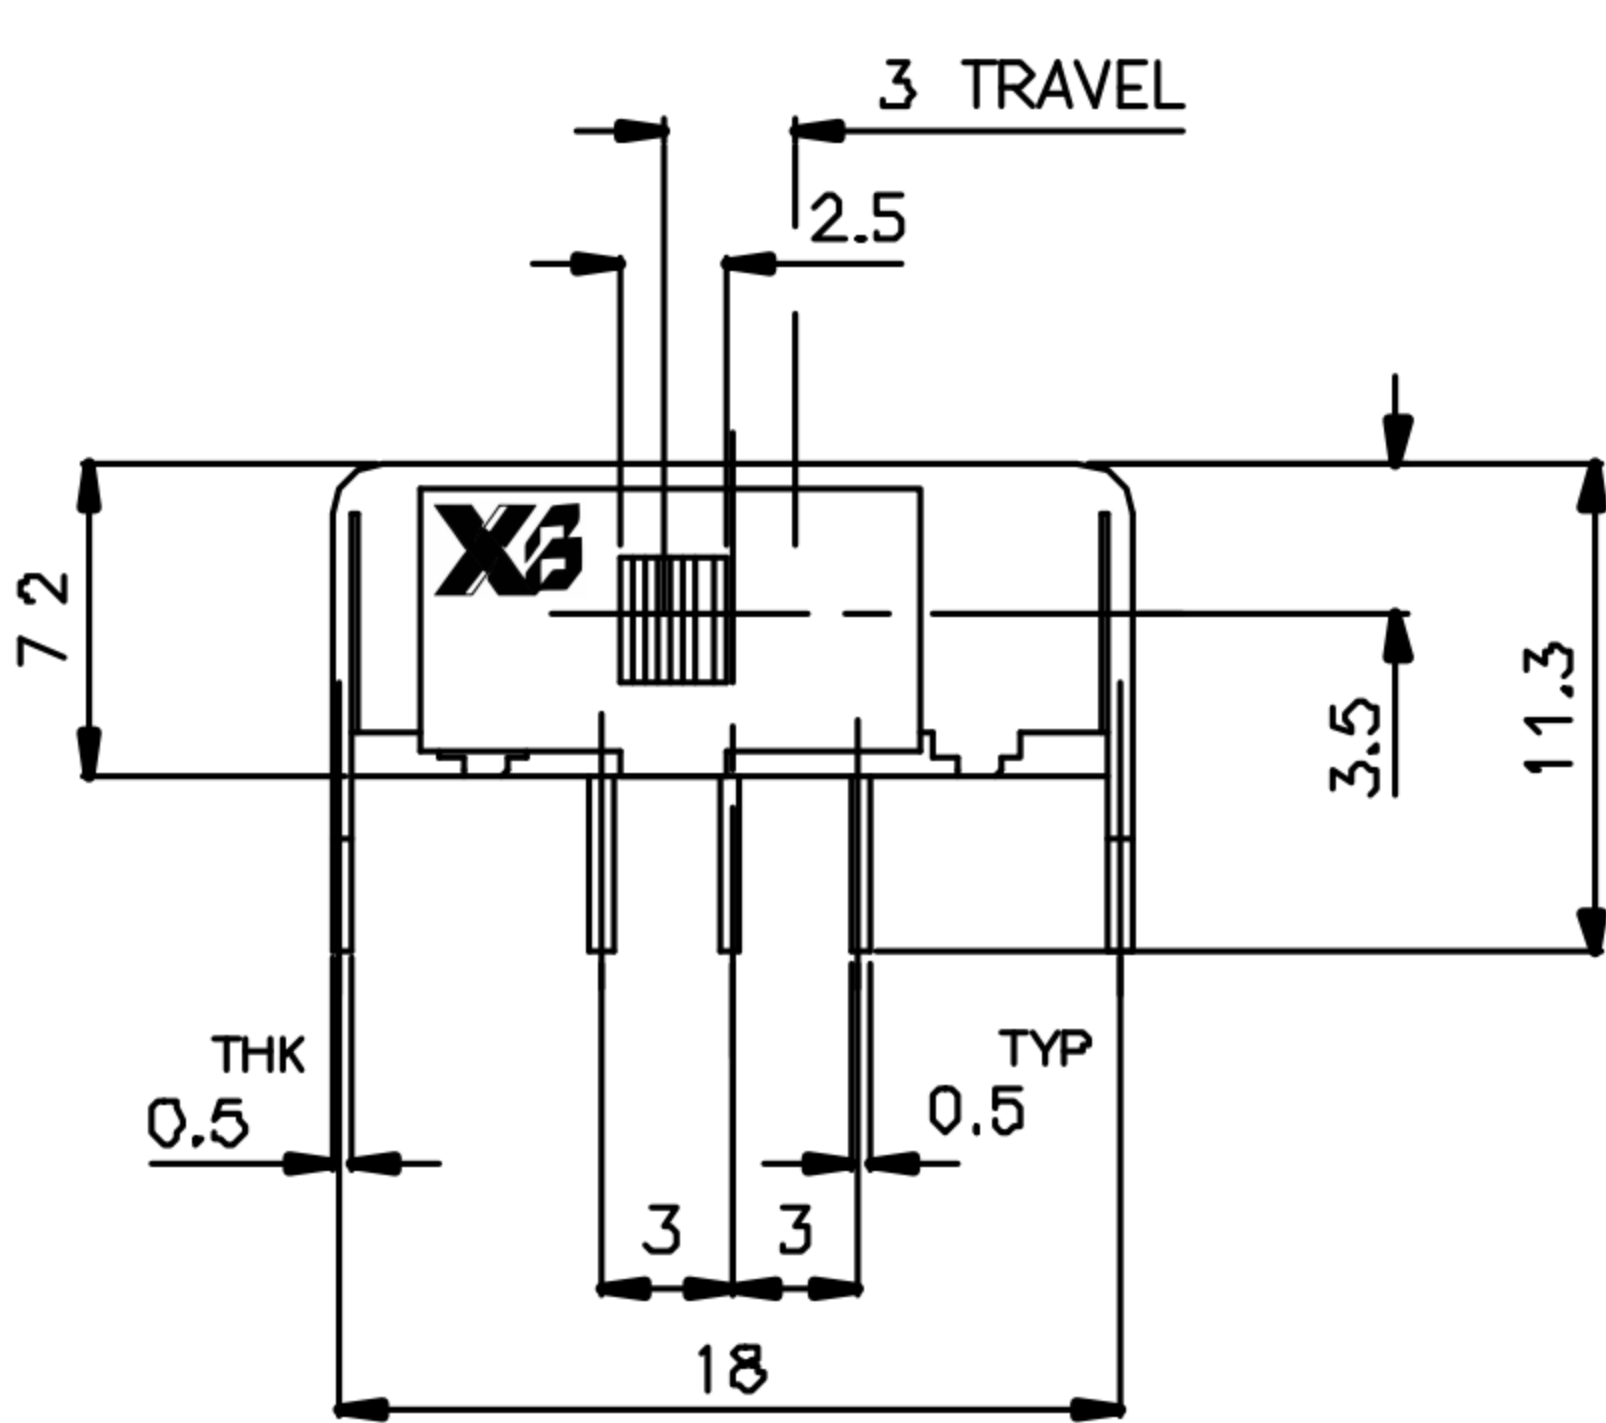

SLIDE SWITCH 1P2T

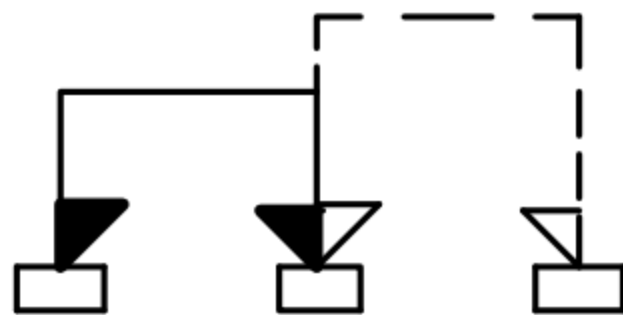

SCHEMATIC

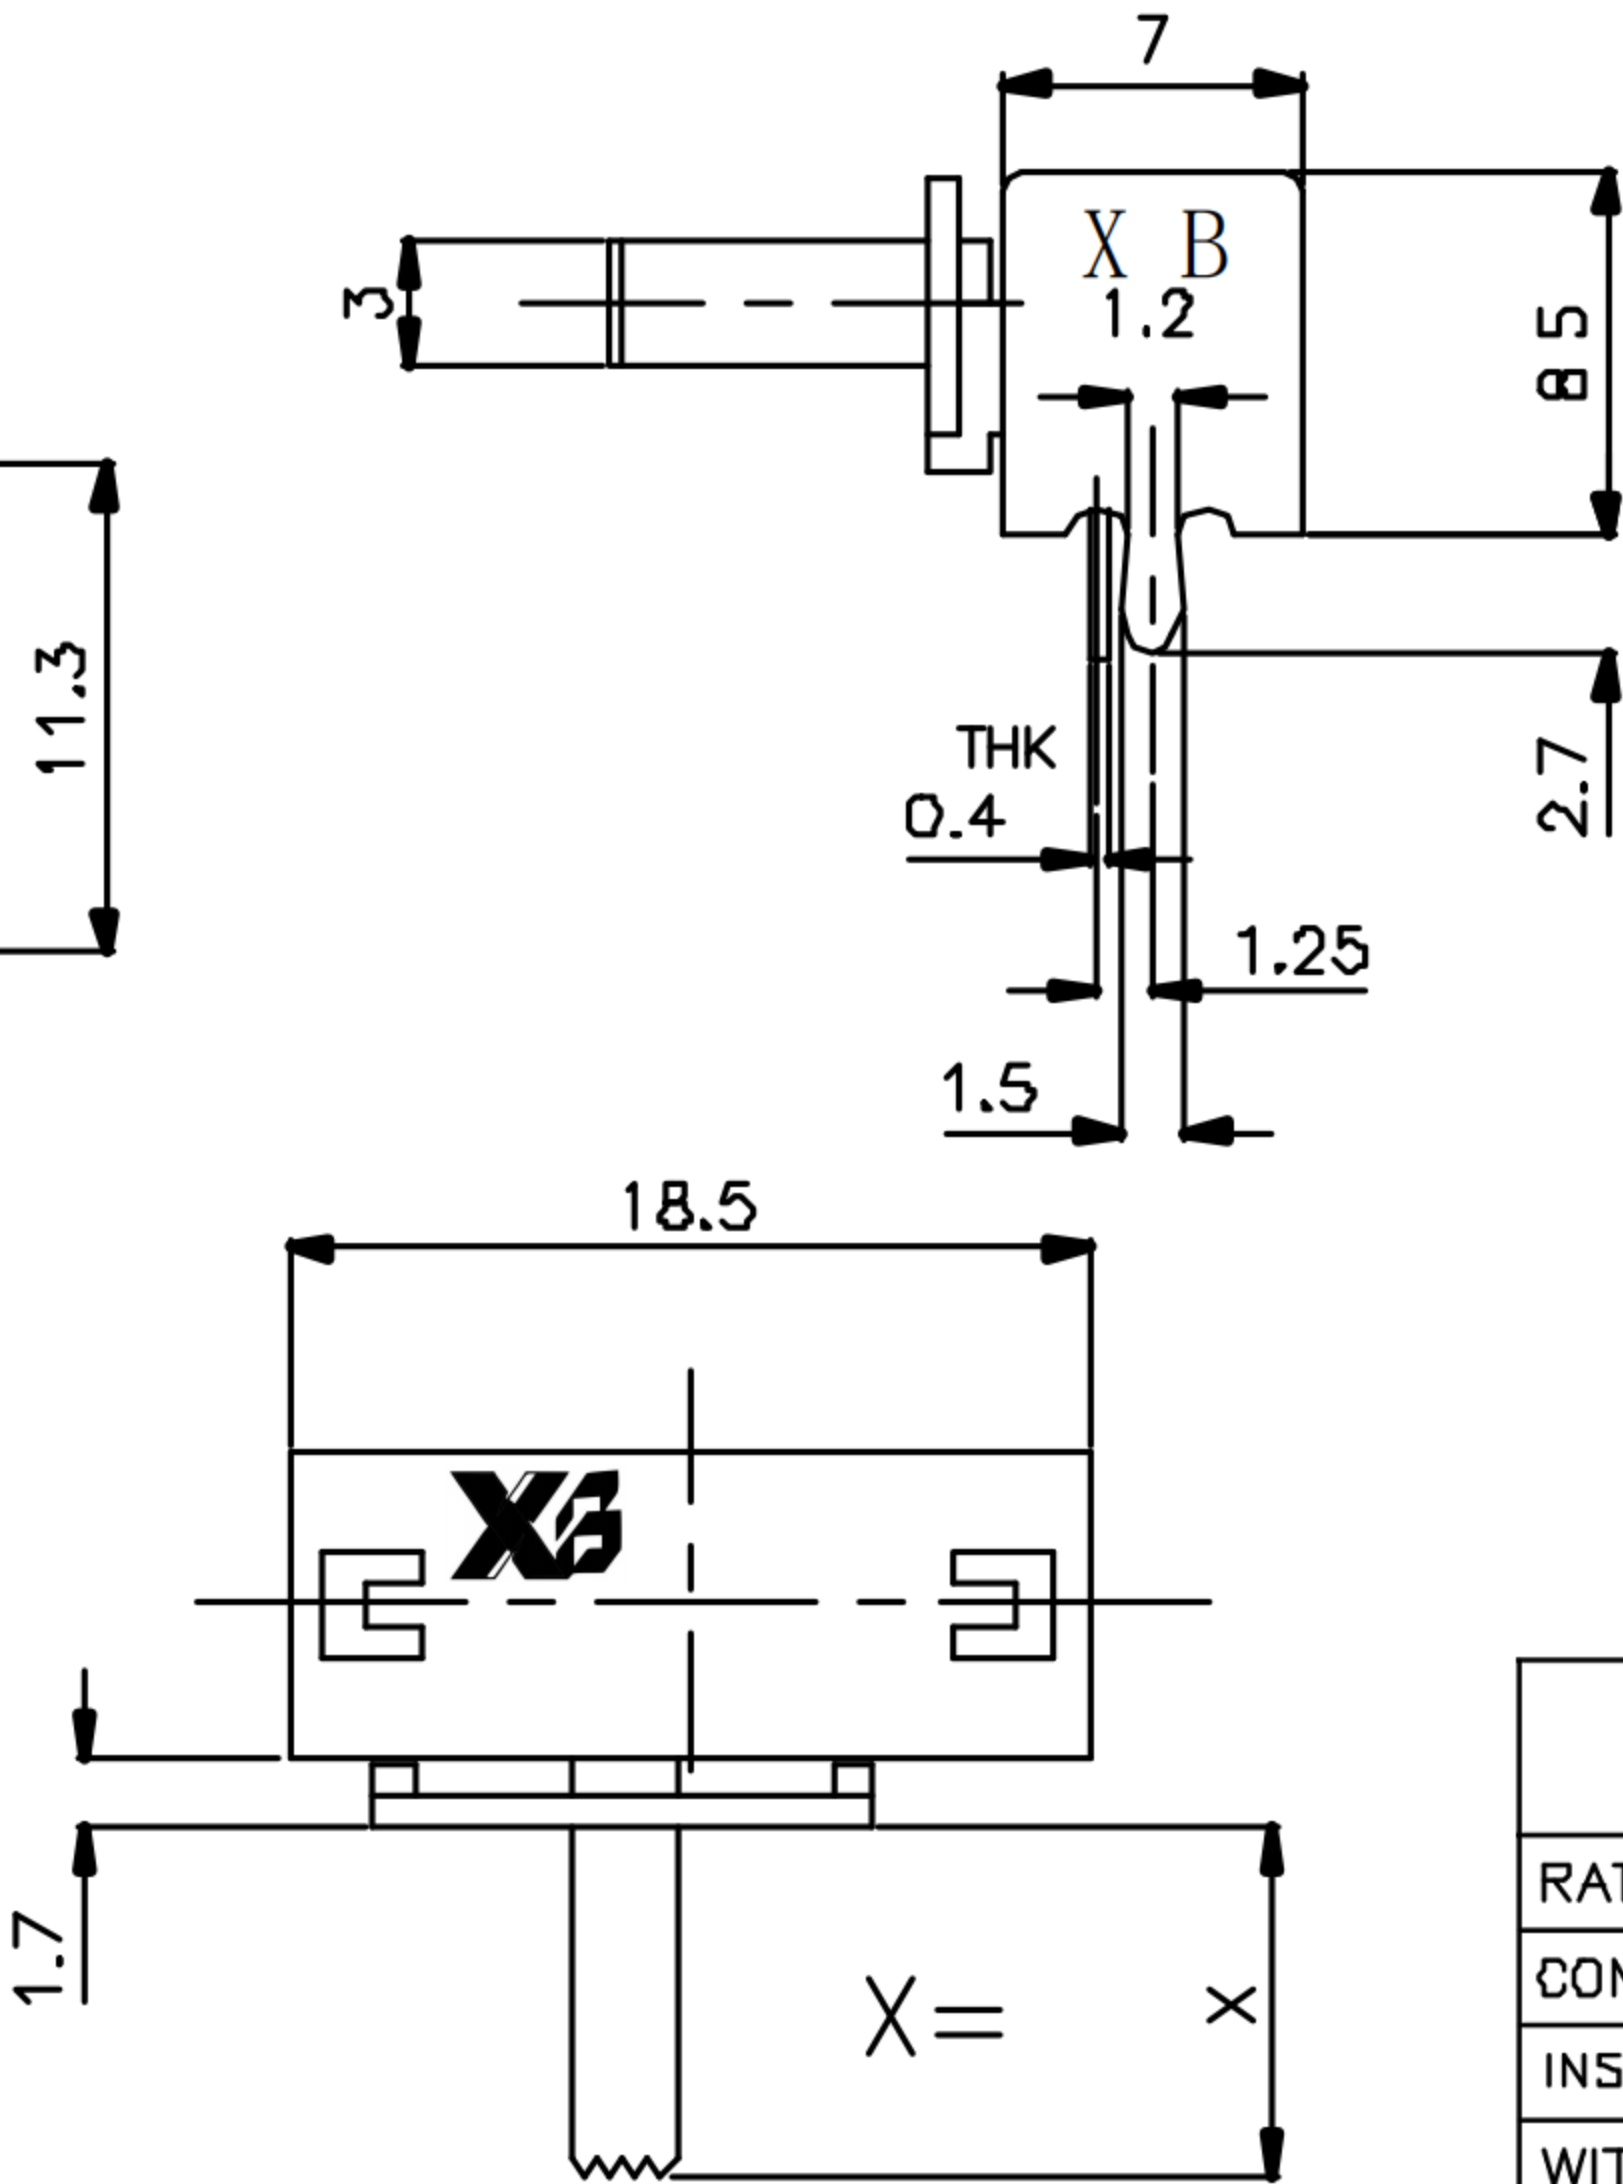


SPECIFICATION (INITIAL)				
RATING:		DC 50V 0.5A		
CONTACT RESISTANCE:		Not more than 30mΩ		
INSULATION RESISTANCE:		500MΩ at 500V DC		
WITHSTAND VOLTAGE:		AC 500V for 1 min		
OPERATION FORCE:		300±200g		
SWITCHING LIFE:		10K Cycles(6—10c/m loading)		



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : HORIZONTAL SLIDE SWITCH

MODEL : XB-SK-12F21

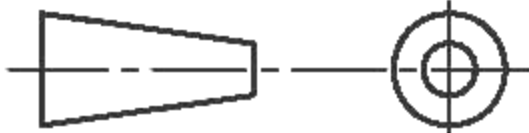

TOLERANCE
<=1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE	
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE	
VBRSION	01	APPD.	FEI. LONG. HE	DATE

7	SPRING	STEEL WIRE	1	NATURE
6	STEEL BALL	STEEL	1	NATURE
5	BOARD	PHENOLIC RESIN	1	NATURE
4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
3	FRAME	IRON STRIP	1	Ni PLATED
2	TERMINAL	BRASS STRIP	8	Ag PLATED
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING