
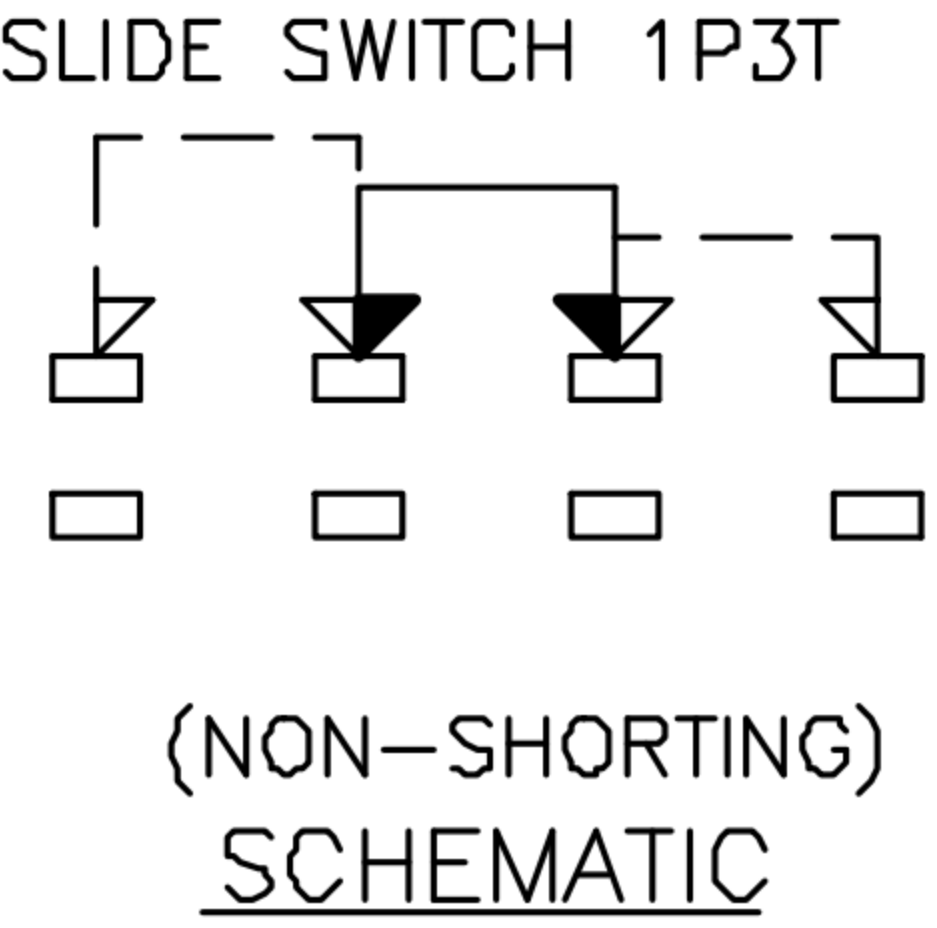


ROHS

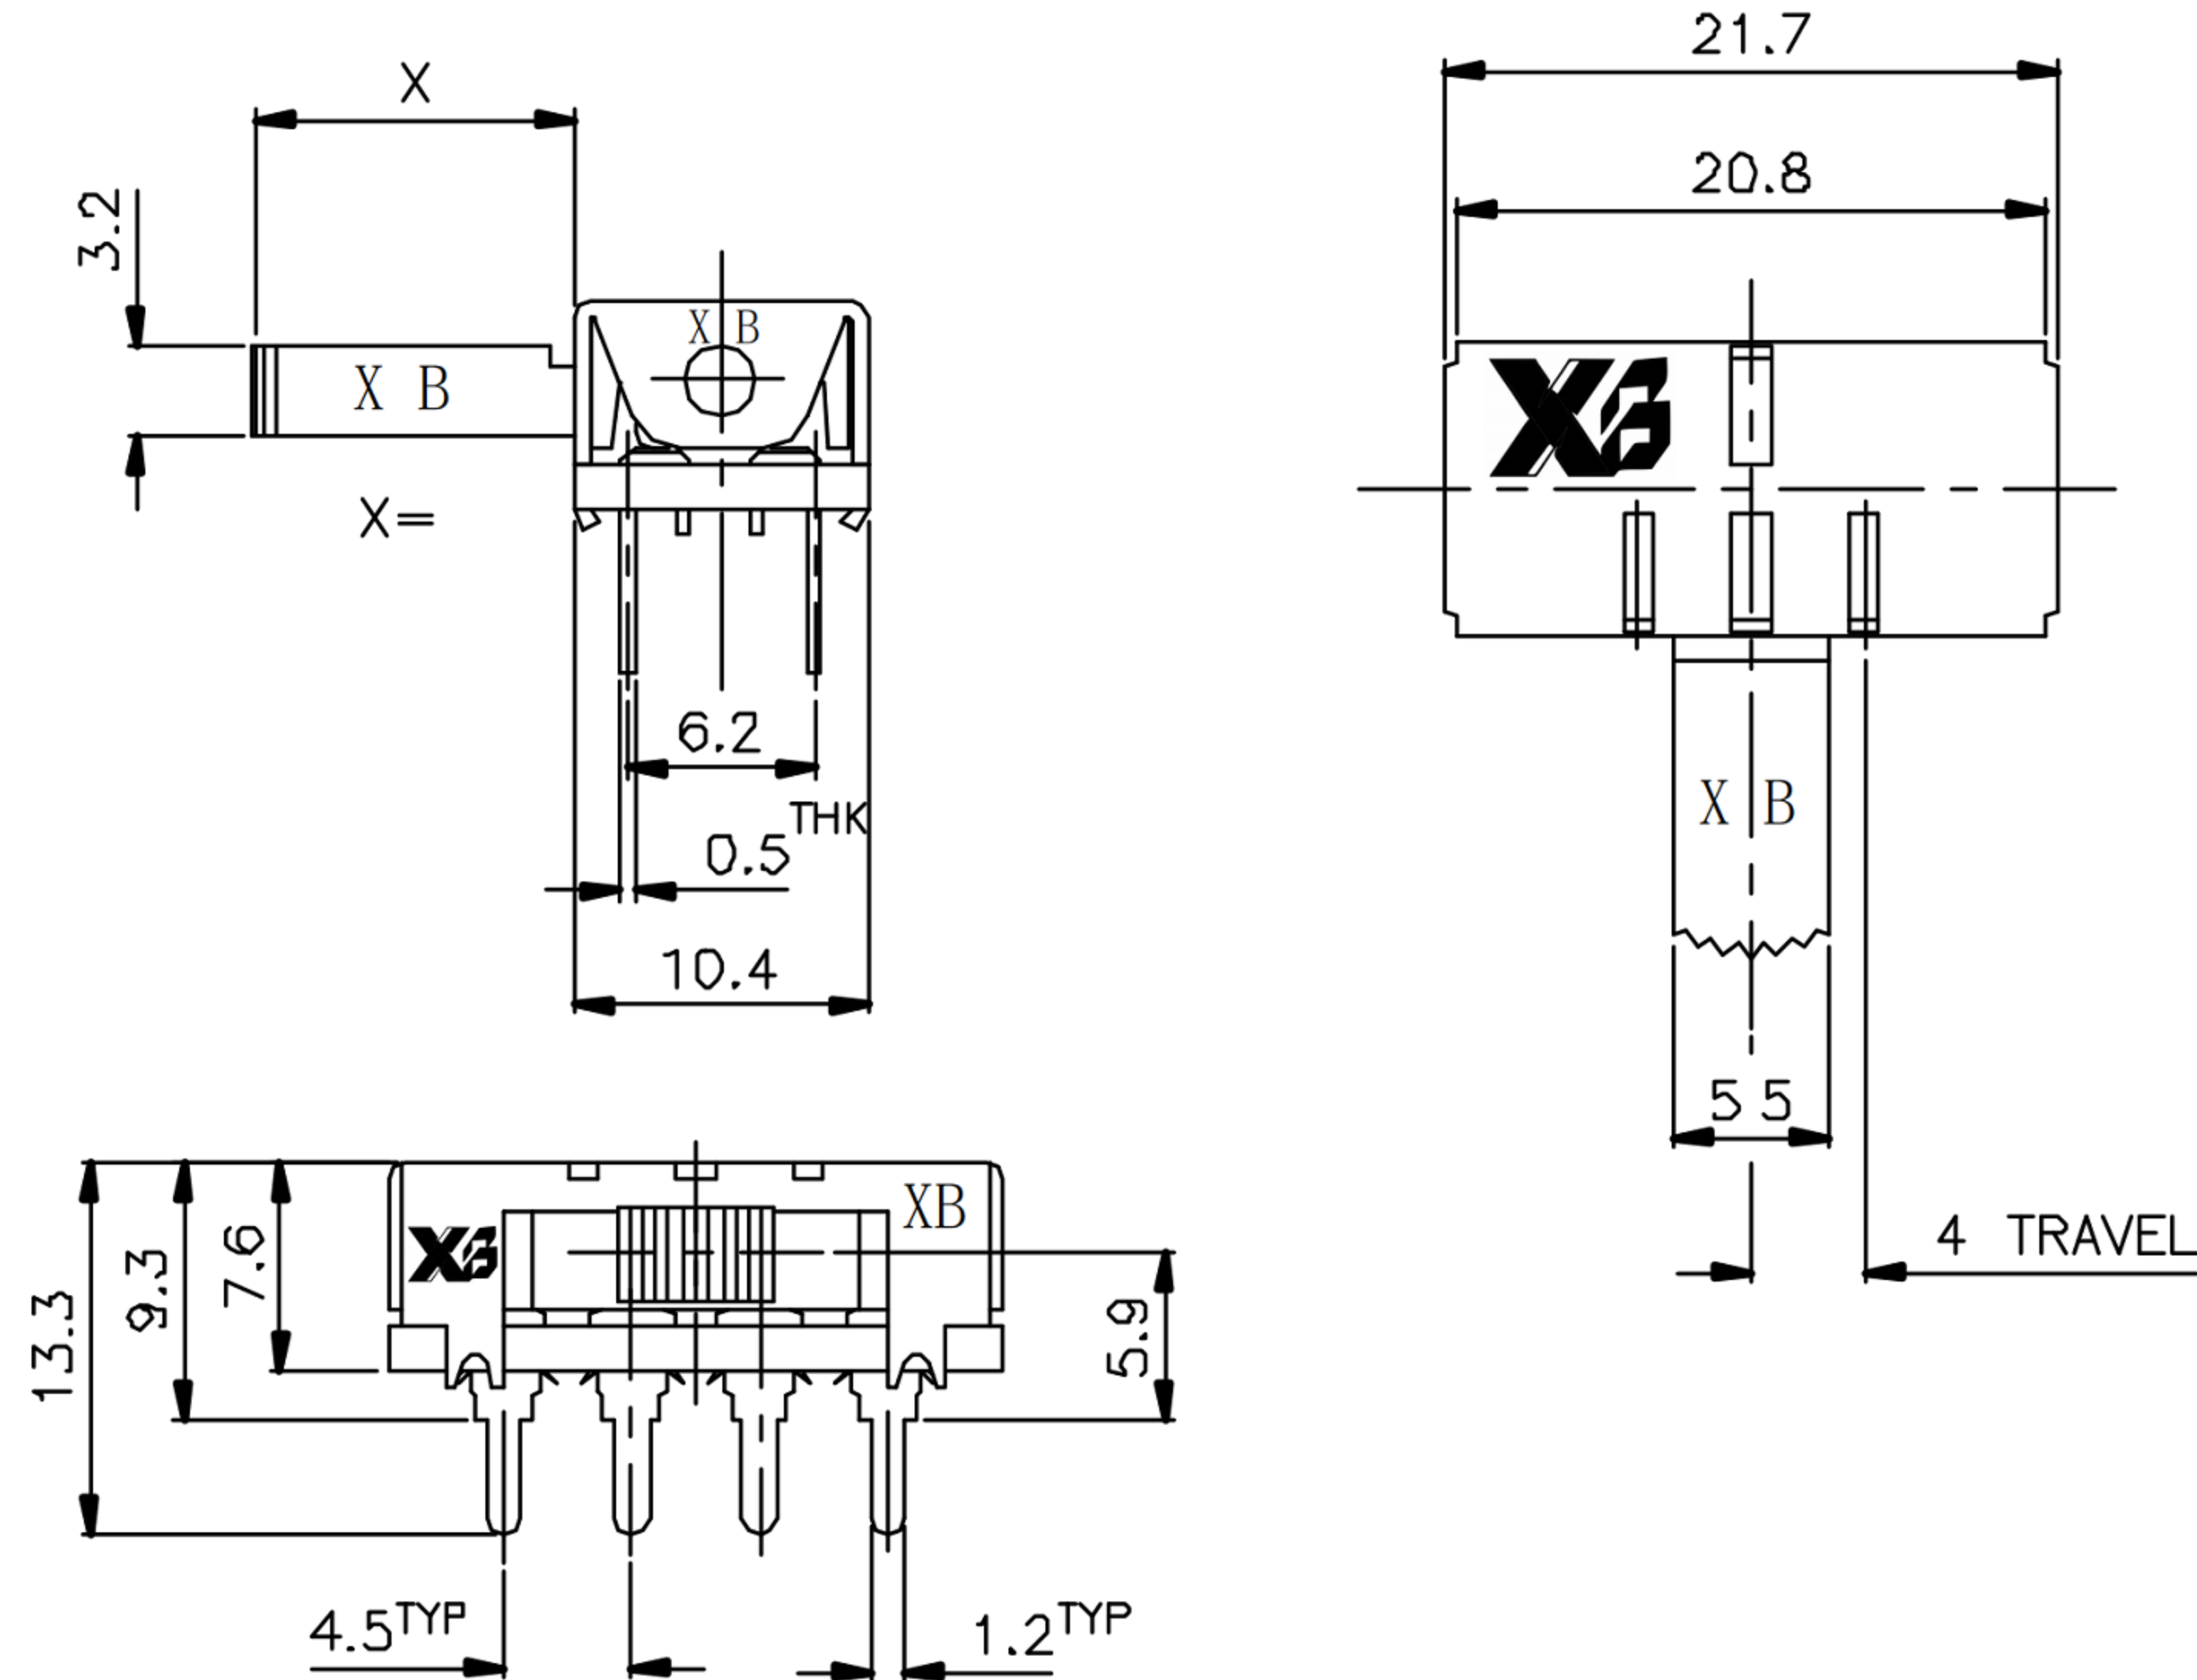

SPECIFICATION (INITIAL)				
RATING:		AC 125V 3A		
CONTACT RESISTANCE:		MAX. 30mΩ		
INSULATION RESISTANCE:		500MΩ AT 500V DC		
WITHSTAND VOLTAGE:		AC 1000V FOR 1 MIN		
OPERATION FORCE:		160 ± 80 gm		
SWITCHING LIFE:		10,000 Cycles(6-10c/m loading)		

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD										
	TITLE : HORIZONTAL SLIDE SWITCH										
	MODEL : XB-WK-13H09T										
UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°	7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE				6	STEEL BALL	STEEL	1	NATURE
VERSION	01	APPD.	FEI. LONG. HE	DATE				5	BOARD	PHENOLIC RESIN	1
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING