
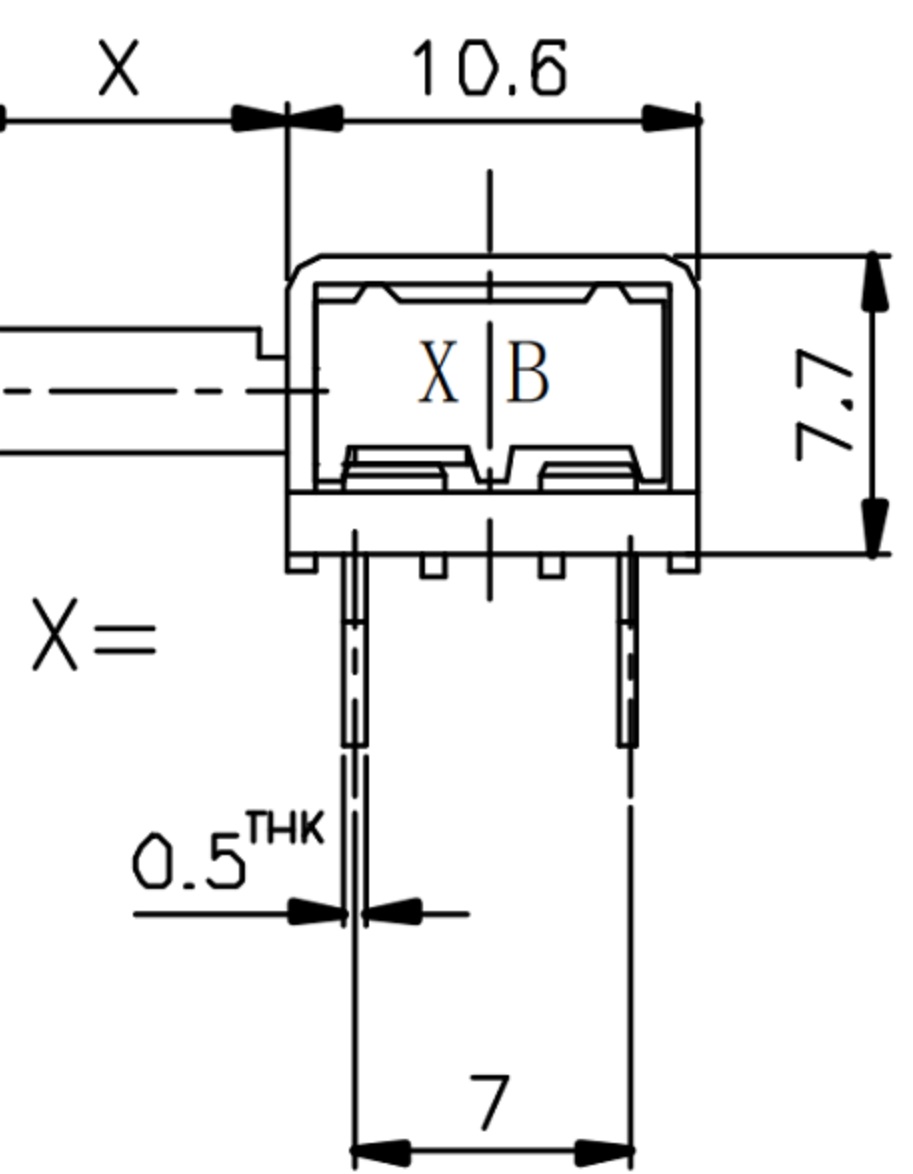


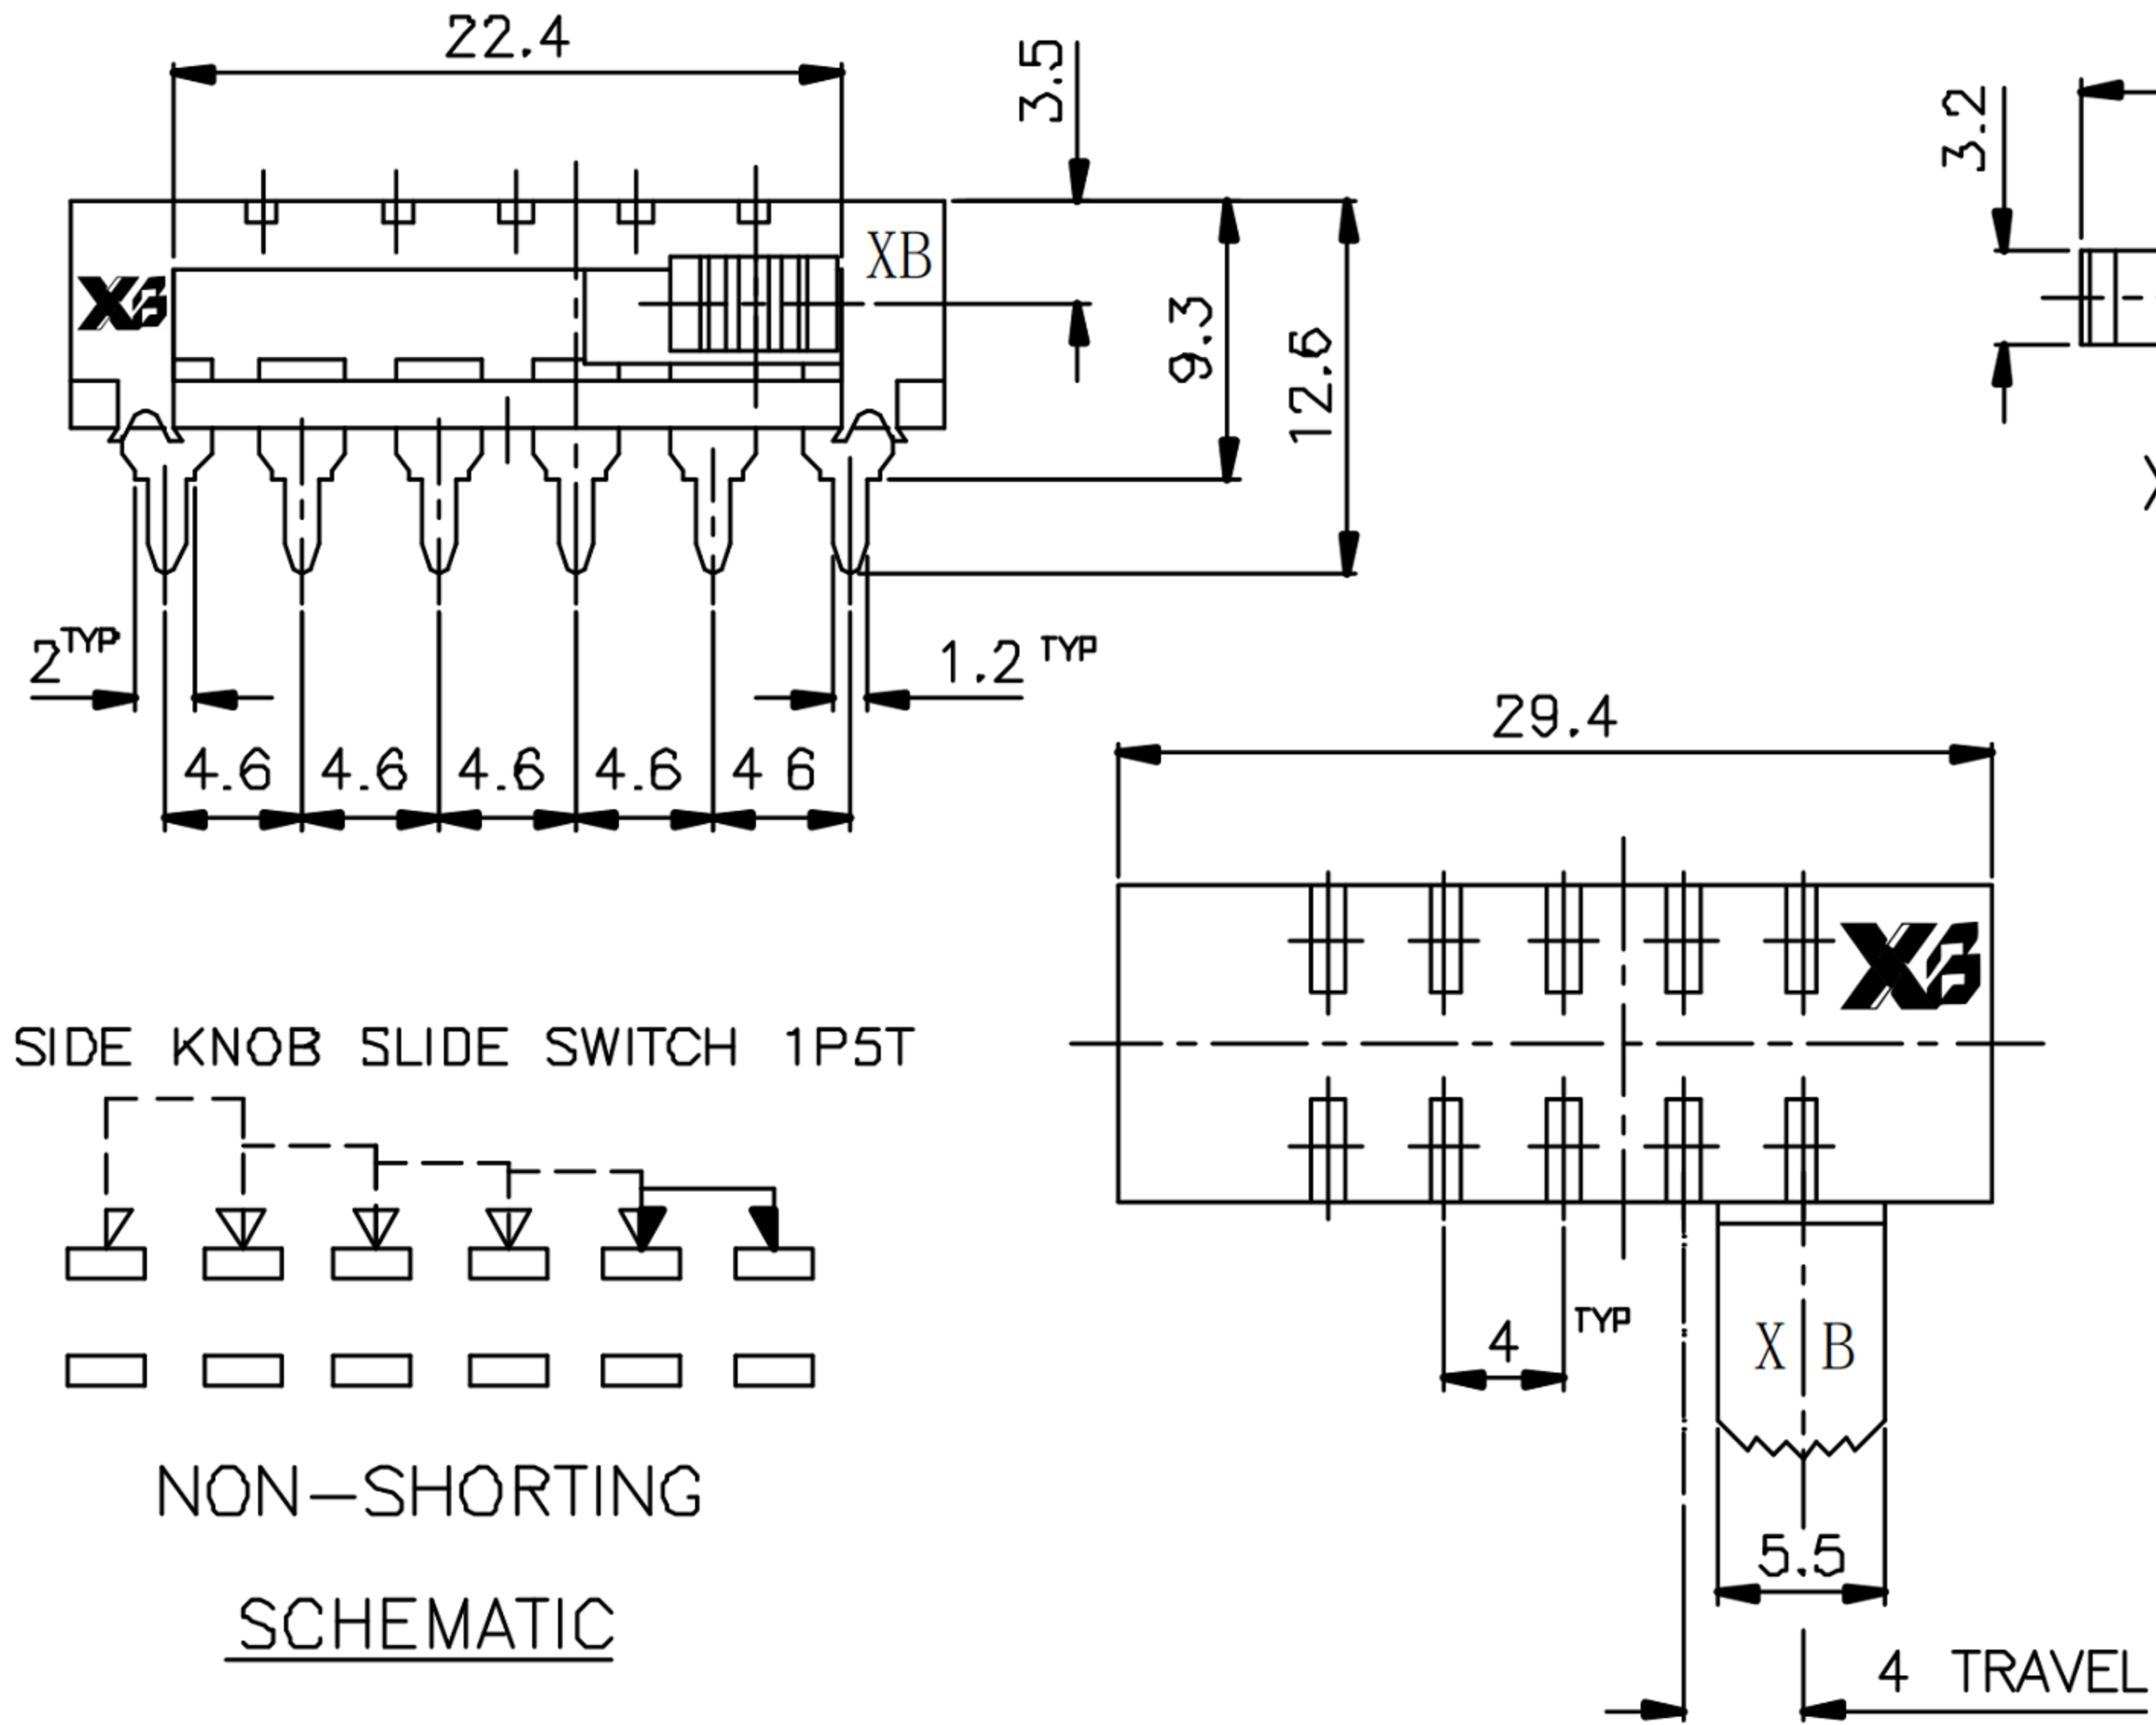

SPECIFICATION (INITIAL)				
RATING:		AC 125V 3A		
CONTACT RESISTANCE:		Not more than 30mΩ		
INSULATION RESISTANCE:		500MΩ at 500V DC		
WITHSTAND VOLTAGE:		AC 1000V for 1 min		
OPERATION FORCE:		400±200g		
SWITCHING LIFE:		10000Cycles(6-10c/m loading)		

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

	东莞市溪榜电子有限公司										
	DONG GUAN XI BANG ELECTRONICS CO.,LTD										
	TITLE : HORIZONTAL SLIDE SWITCH										
MODEL : XB-WK-15H01T											
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE ≤1.5mm±0.1 > 1.5mm±0.2 ≥10mm±0.3	ANGLE ±2°					
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE							
VERSION	01	APPD.	FEI. LONG. HE	DATE							
							7	SPRING	STEEL WIRE	1	NATURE
							6	STEEL BALL	STEEL	1	NATURE
							5	BOARD	PHENOLIC RESIN	1	NATURE
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING